

REV. Status

CE DC 24V 500mA POWER SUPPLY

REVISION -
01/25/01 RJ

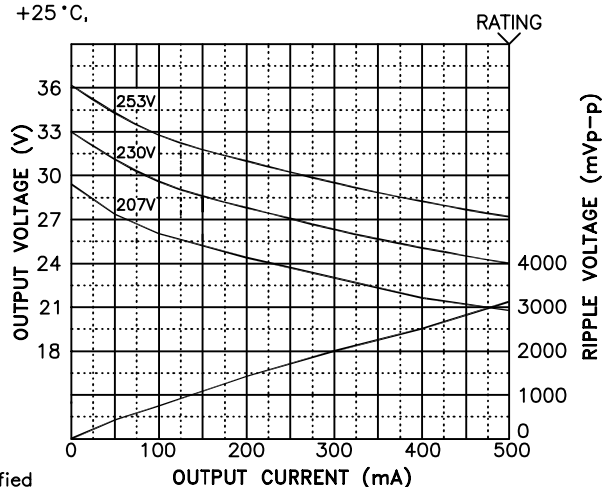

A. Electrical specifications

1. Input voltage: AC 230V $\pm 10\%$ 50Hz ± 0.5 Hz
2. Output voltage and current: DC 24V at 500mA

Vin	100% Load	10% Full Load
207	19.76VDC MIN	-
230	23.5~24.5VDC	30.7VDC MAX
253	-	34.2VDC MAX

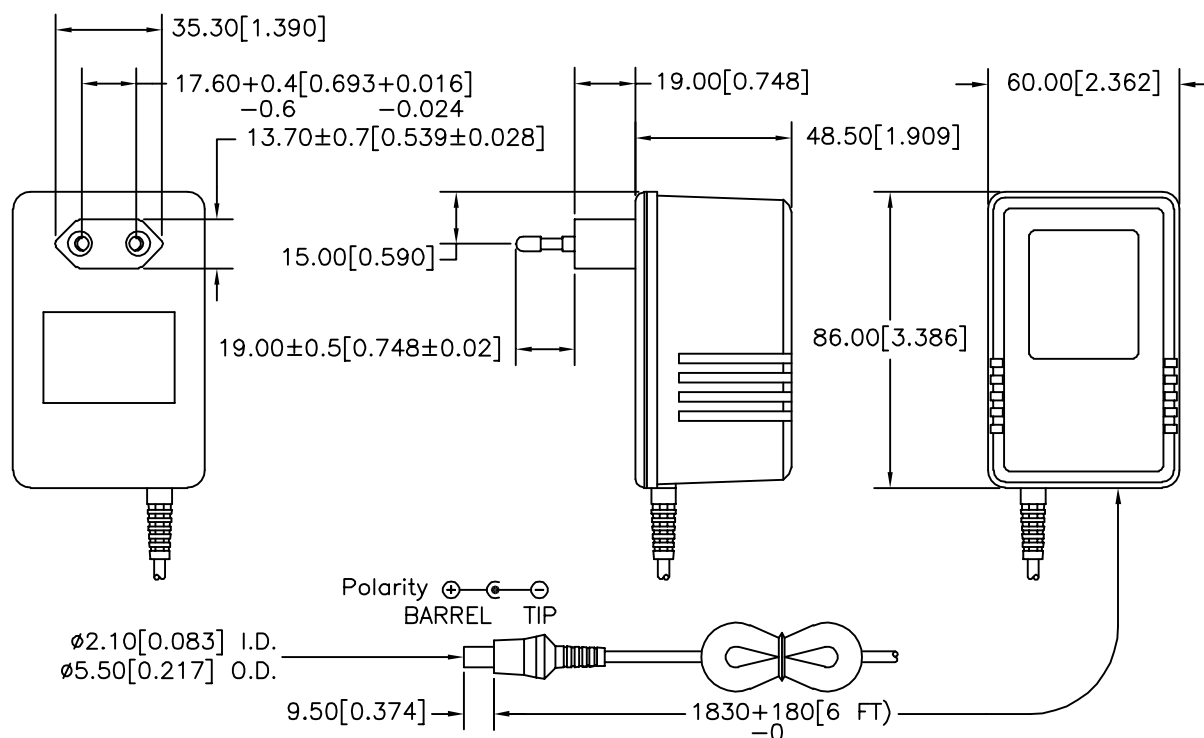
NOTE: Specification applies after 10 minutes warm-up with 500mA load and at any operating temperature

3. Operating temperature: 0°C to +40°C
4. Storage temperature: -20°C to +85°C
5. Operating and Storage Humidity: 0 to 95% without condensation
6. Withstand voltage: AC 4000Vrms 1 minute @ input to output

B. Typical performance data test condition: Ta = +25°C,
measured after 10 minute warm-up with
input at 230V 50HzC. Safety agencies
IEC 65.950, 742
CE MarkingD. Nameplate:
See drawing P-N1-12412 for details

E. Mechanical Specifications

All dimensions nominal unless otherwise specified



PREPARED BY:

D. Rund

ENGINEER:

R. Jones

QUALITY CONTROL:

D. Kelley

APPROVED:

D. Kelley

DWG CONTROL NO.
P-A7-12596
ACAD\PS\A7125961.DWGREV
-CE DC 24V 500mA
POWER SUPPLY**TAMURA CORPORATION OF AMERICA**
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482**825FG41303**

MODEL SPECIFICATION

DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.