

REV. Status

REVISION -
4/28/92 YN

REVISION A
REFORMATTED
TEMECULA
WAS CARSON
9/11/95 DS

REVISION B
ADDED
NAMEPLATE
05/29/98 TS

A. Electrical specifications

1. Input voltage: AC 120V $\pm 10\%$ 60Hz ± 0.5 Hz
2. Output voltage and current: AC 16V at 1250mA

Vin	1250mA Load	125mA Load
108	13.3VAC MIN	-
120	15.2-16.8VAC	19.3VAC MAX
132	-	21.3VAC MAX

NOTE: Specification applies after 10 minutes warm-up with 1250mA load and at any operating temperature



3. Operating temperature: 0°C to +40°C
4. Storage temperature: -20°C to +85°C
5. Operating and Storage Humidity: 0 to 95% without condensation
6. Withstand voltage: AC 1500Vrms 1 minute @ input to output
7. Input earth prong is connected to output "G" terminal

B. Typical performance data test condition: Ta = +25° C, measured after 10 minute warm-up with input at 120V 60Hz

C. Safety agencies



UL File No. E82180
CSA File No. LR38236

D. Nameplate: See drawing P-N1-11157 for detail

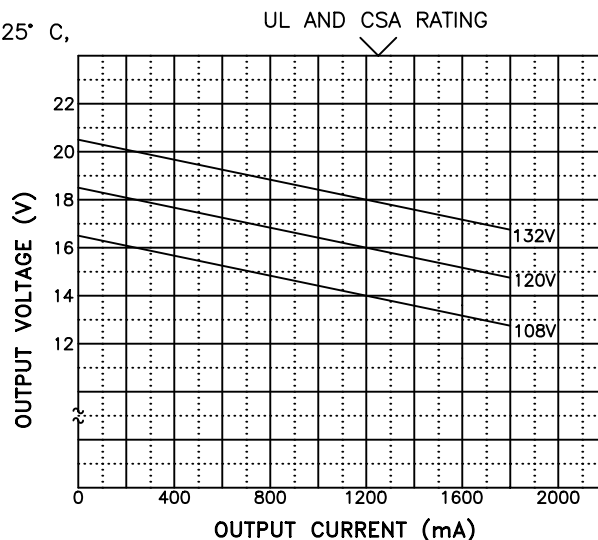

E. Mechanical Specifications;

All dimensions shown are nominal unless otherwise specified

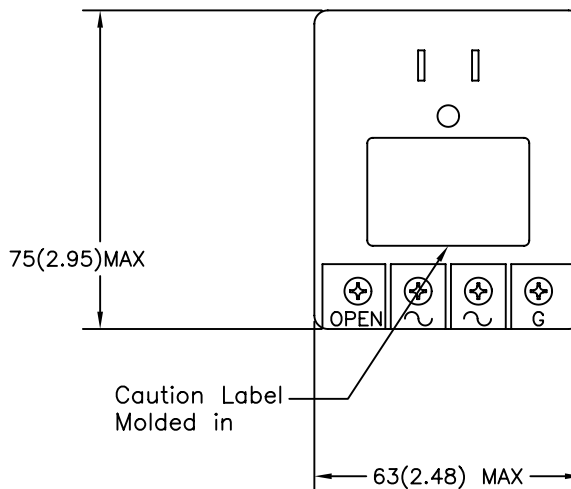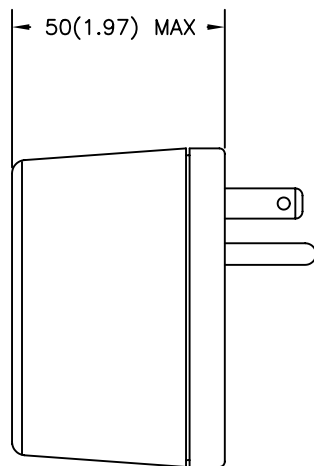

PREPARED BY:

D. Kelley

ENGINEER:

D. Suzuki

QUALITY CONTROL:

D. Kelley

APPROVED:

D. Suzuki

DWG CONTROL NO.
P-A7-10675
ACAD\PS\A7106751.DWG

REV
B

UL/CSA AC 16V 1250mA
POWER SUPPLY

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482

830A0063-03

MODEL SPECIFICATION

DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.