


Linear Wall Plug Adapters

AC and DC Output Versions with Output Cord

- Approved to UL1310 & cUL
- Operating Temp = -10°C to +40°C
- Withstand Voltage = 1,500V (input to output)
- High Quality Robust Designs
- Class II Transformer



Part #	Rated Output at 100% Load		Output Type (AC/DC)
	Volts	mA	
212AS03032	3.0	320	DC
318AS03100	3.0	1000	DC
830AS03175	3.0	1750	DC
212AS04025	4.5	250	DC
318AS04070	4.5	700	DC
420AS04100	4.5	1000	DC
830AS04150	4.5	1500	DC
212AS06020	6.0	200	DC
318AS06050	6.0	500	DC
420AS06090	6.0	900	DC
830AS06125	6.0	1250	DC
212AS09012	9.0	125	DC
318AS09035	9.0	350	DC
420AS09060	9.0	600	DC
830AS09100	9.0	1000	DC
835AS09140	9.0	1400	DC
212AS12010	12.0	100	DC
318AS12030	12.0	300	DC
420AS12050	12.0	500	DC
830AS12080	12.0	800	DC
835AS12100	12.0	1000	DC
212AS15007	15.0	75	DC
318AS15025	15.0	250	DC
420AS15040	15.0	400	DC
830AS15070	15.0	700	DC
835AS15080	15.0	800	DC
212AS18006	18.0	60	DC
318AS18020	18.0	200	DC
420AS18035	18.0	350	DC
830AS18060	18.0	600	DC
835AS18070	18.0	700	DC
212AS24005	24.0	50	DC
318AS24015	24.0	150	DC
420AS24025	24.0	250	DC
830AS24045	24.0	450	DC
835AS24050	24.0	500	DC
212AS12012	12.0	125	AC
318AS12037	12.0	375	AC
420AS12075	12.0	750	AC
830AS12100	12.0	1000	AC
835AS12150	12.0	1500	AC
212AS16010	16.0	100	AC
318AS16030	16.0	300	AC
420AS16056	16.0	560	AC
830AS16090	16.0	900	AC
835AS16112	16.0	1125	AC
212AS20007	20.0	75	AC
318AS20022	20.0	225	AC
420AS20045	20.0	450	AC
830AS20080	20.0	800	AC
835AS20090	20.0	900	AC
212AS24006	24.0	60	AC
318AS24020	24.0	200	AC
420AS24037	24.0	375	AC
830AS24070	24.0	700	AC
835AS24075	24.0	750	AC

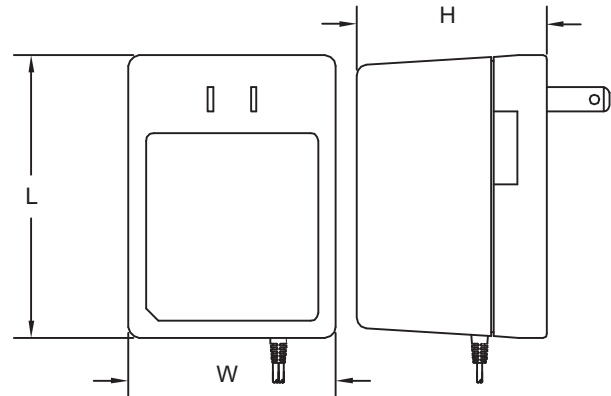


Mechanical Dimension Table

SERIES PREFIX	LENGTH(L) MM(INCH)	WIDTH(W) MM (INCH)	HEIGHT(H) MM(INCH)
212AS	64 (2.51)	40 (1.57)	36 (1.42)
318AS	70 (2.75)	46 (1.81)	43 (1.69)
420AS	72 (2.83)	52 (2.54)	47 (1.85)
830AS	91 (3.58)	58 (2.28)	52 (2.07)
835AS	103 (4.05)	62 (2.44)	62 (2.44)

OUTPUT PLUG DIMENSIONS

PLUG TYPE	D1 (mm)	D2 (mm)	L (mm)	GENDER
D	5.5	2.10	12.5	FEMALE



Polarity $\ominus$ $\oplus$
BARREL TIP

Notes

- 1 Typical output voltage for % load (FL) and line (VAC) indicated.
- 2 UL: UL1310 LISTE DUL*: UL1310 LISTING WITH UL1411
C: UL Approved for battery charger ckts
(contact battery mfr for recommended volt.)
- 3 Complies (C) with or is listed (L) to CSA C22.2, No. 223.66
- 4 CUL : UL1310 listed for use in Canada

TAMURA CORPORATION

43352 Business Park Drive. | P.O. Box 892230 Temecula, CA 92589-2230 | www.tamuracorp.com

USA Japan United Kingdom Hong Kong

Tel: 800-872-6624 Tel: 81 (0)3 3978-2111 Tel: 44 (0) 1380 731 700 Tel: 852-2389-4321

Fax: 909-676-9482 Fax: 81 (0)3 3923-0230 Fax: 44 (0) 1380 731 702 Fax: 852-2341-9689