

HWS-A SERIES

Single Output 15W ~ 150W

UNIT
PC Board

Contents


- HWS-A/HD
- HWS-A/ME
- Block Diagram, Sequence Time Chart
- Instruction Manual

- a_HWS-A_15 Page
- a_HWS-A_25 Page
- a_HWS-A_35 Page
- a_HWS-A_37 Page

HWS-A



15 - 150W standard :without cover HWS15A/A HWS30A/A HWS50A/A HWS80A/A HWS100A/A HWS150A/A



Features

- Environmentally-friendly
 - Contributing to energy conservation of the customer's equipment in a further high efficiency
 - Also improve efficiency at light load
 - Reduction of no-load power
- Easy to use
 - Enlarge ambient temperature to ensure the load factor of 100% to 50 °C from 40 °C , the customer's equipment is up the degree of freedom of the mechanism design even at high temperatures (Ambient temperature -10°C to +70°C)
- Safety and security
 - Reduce the maintenance frequency of your device by a long life
 - Double-sided board adopted inherited the conventional model
 - "Safety terminal" covering current flowing part secures safety for users. "No screw-dropping" design prevents from losing screws during maintenance operation.

Model naming method

[HWS15A-150A]


HWS 15A - 24 / ☐

Series name Output power

Blank: Without cover(standard)
 / A : With cover
 / R : Remote ON/OFF control, without cover (HWS50A,80A,100A,150A only)
 / RA : Remote ON/OFF control, with cover (HWS50A,80A,100A,150A only)
 / ADIN : DIN rail mountable (with cover type only, from 5 to 48 VDC type)
 / B : Connector connection(JST) (HWS50A,80A,100A,150A only, 100A and 150A,12V-48V only)

Nominal Output Voltage
 ex. 3 : 3.3V, 5 : 5V, 48 : 48V

Applications



Conformity to RoHS Directive

Product Line up

Output Voltage	15W		30W		50W		80W		100W		150W	
	Output Current	MODEL	Output Current	MODEL	Output Current	MODEL	Output Current	MODEL	Output Current	MODEL	Output Current	MODEL
3.3V	3A	HWS15A-3	6A	HWS30A-3	10A	HWS50A-3	16A	HWS80A-3	20A	HWS100A-3	30A	HWS150A-3
5V	3A	HWS15A-5	6A	HWS30A-5	10A	HWS50A-5	16A	HWS80A-5	20A	HWS100A-5	30A	HWS150A-5
12V	1.3A	HWS15A-12	2.5A	HWS30A-12	4.3A	HWS50A-12	6.7A	HWS80A-12	8.5A	HWS100A-12	13A	HWS150A-12
15V	1A	HWS15A-15	2A	HWS30A-15	3.5A	HWS50A-15	5.4A	HWS80A-15	7A	HWS100A-15	10A	HWS150A-15
24V	0.65A	HWS15A-24	1.3A	HWS30A-24	2.2A	HWS50A-24	3.4A	HWS80A-24	4.5A	HWS100A-24	6.5A	HWS150A-24
48V	0.33A	HWS15A-48	0.65A	HWS30A-48	1.1A	HWS50A-48	1.7A	HWS80A-48	2.1A	HWS100A-48	3.3A	HWS150A-48

HWS15A SPECIFICATIONS (Read instruction manual carefully, before using the power supply unit.)

UNIT -
PC Board

ITEMS/UNITS			MODEL	HWS15A-3	HWS15A-5	HWS15A-12	HWS15A-15	HWS15A-24	HWS15A-48
Input	Input Voltage Range	(*2)	V	AC85 - 265 (47 - 63Hz) or DC120 - 370					
	Efficiency(100VAC) (typ)	(*1)	%	70	77	80	81	82	82
	Efficiency(200VAC) (typ)	(*1)	%	71	79	83	84	85	82
	Input Current (100/200VAC) (typ)	(*1)	A	0.24/0.15	0.35/0.2				
	Inrush Current (100/200VAC) (typ) (*1)(*3)	A	14/28 (Ta = 25℃ , Cold Start)						
	Leakage Current	(*9)	mA	Less than 0.5 (0.2 (typ) at 100VAC / 0.4 (typ) at 230VAC)					
Output	Nominal Output Voltage		VDC	3.3	5	12	15	24	48
	Maximum Output Current		A	3	3	1.3	1	0.65	0.33
	Maximum Output Power		W	10.0	15.0	15.6	15.0	15.6	15.8
	Maximum Line Regulation	(*5)	mV	20	20	48	60	96	192
	Maximum Load Regulation	(*6)	mV	40	40	96	120	150	240
	Temperature Coefficient			Less than 0.02% /℃					
	Maximum Ripple & Noise(0≤Ta≤70℃) (*4)	mV	120	120	150	150	150	200	
	Maximum Ripple & Noise(-10≤Ta<0℃) (*4)	mV	160	160	180	180	180	240	
	Hold-up Time (typ)	(*1)	ms	20					
	Output Voltage Range		VDC	2.97 - 3.96	4.0 - 6.0	9.6 - 14.4	12.0 - 18.0	19.2 - 28.8	38.4 - 52.8
Function	Over Current Protection	(*7)	A	3.15 —	3.15 —	1.36 —	1.05 —	0.68 —	0.34 —
	Over Voltage Protection	(*8)	VDC	4.13 - 4.95	6.25 - 7.25	15.0 - 17.4	18.8 - 21.8	30.0 - 34.8	55.2 - 64.8
	Remote Sensing			-					
	Remote ON/OFF			-					
	Parallel Operation			-					
	Series Operation			Possible					
	Line DIP			Designed to meet SEMI-F47 (200VAC Line only)					
Environment	Operating Temperature	(*10)	℃	-10 to +70 (-10 to +50℃ :100%, +60℃ :80%, +70℃ :60%)					
	Storage Temperature		℃	-30 to +85					
	Operating Humidity		% RH	30 - 90 (No Condensing)					
	Storage Humidity		% RH	10 - 95 (No Condensing)					
	Vibration			At no operating, 10-55Hz (Sweep for 1min) 19.6m/s ² Constant, X,Y,Z 1hour each.					
	Shock			Less than 196.1m/s ²					
	Cooling			Convection Cooling					
Isolation	Withstand Voltage			Input - FG : 2kVAC (20mA), Input - Output : 3kVAC (20mA) Output - FG : 500VAC (20mA) for 1min					
	Isolation Resistance			More than 100MΩ at 25℃ and 70%RH Output - FG : 500VDC					
Standards	Safety			Approved by UL62368-1, CSA62368-1, EN62368-1, UL60950-1, CSA60950-1, EN60950-1. (Expire date of 60950-1: 20/12/2020) Designed to meet Den-an Appendix 8 at 100VAC only. With cover type only: Approved by UL508, CSA C22.2 No.107.1-01.					
	PFHC			Designed to meet IEC61000-3-2					
	Conducted Emission, Radiated Emission	(*11)		Designed to meet EN55011/EN55032-B, FCC-B, VCCI-B					
	Immunity	(*11)		Designed to meet IEC61000-6-2 IEC61000-4-2, -3, -4, -5, -6, -8, -11					
Mechanical	Weight (typ)		g	160 (With cover: 190)					
	Size (W x H x D)		mm	26.5 x 82 x 80 (Refer to Outline Drawing)					

(*1) At 100VAC/200VAC, Ta=25°C , nominal output voltage and maximum output power.

(*2) For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100 - 240VAC(50 - 60Hz).

(*3) Not applicable for the inrush current to Noise Filter for less than 0.2ms.

(*4) Measure with JEITA RC-9131B probe, Bandwidth of scope :100MHz.
For start up at low ambient temperature and low input voltage, output ripple noise might not meet specification.
However, specification can be met after one second.

(*5) 85 - 265VAC, constant load.

(*6) No load-Full load, constant input voltage.

(*7) Hiccup with automatic recovery. Avoid to operate at over load or short circuit condition.

(*8) OVP circuit will shut down output, manual reset (Re power on).

(*9) Measured by the each measuring method of UL, CSA, EN and Den-an (at 60Hz), Ta=25°C .


(*10) Output Derating

- Refer to Output Derating Curve.

- Load (%) is percent of maximum output power or maximum output current, do not exceed its derating of maximum load.

(*11) The power supply is considered a component which will be installed into a final equipment.
The final equipment should be re-evaluated that it meets EMC directives.



Recommended EMC Filter

RSEN-2003D or RSEN-2003
Please refer to "TDK-Lambda
EMC Filters" catalog.



Outline Drawing

UNIT ·
PC Board

[HWS15A]



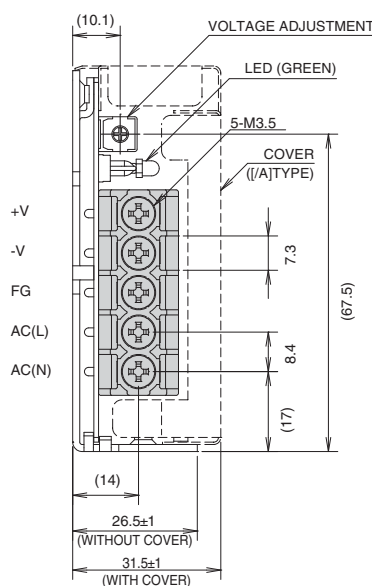


Recommended Solderless Terminal		
D(max)	t(max)	Qty(max)
6.8mm	0.8mm	2 pcs

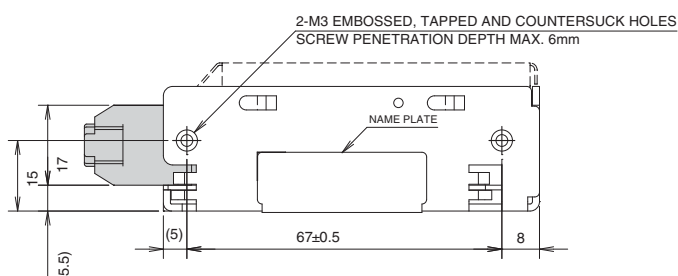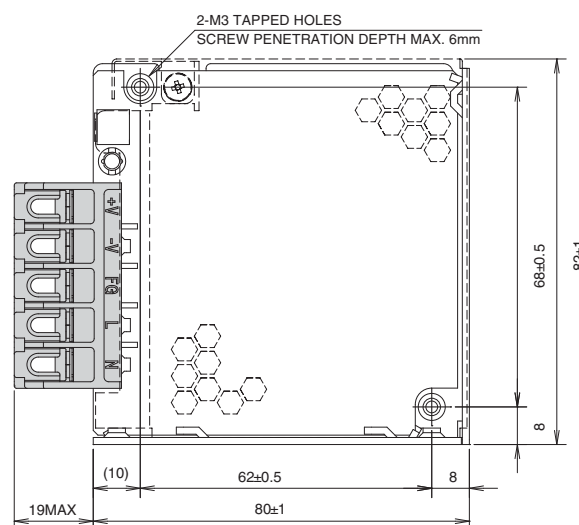

[unit: mm]

Output Derating

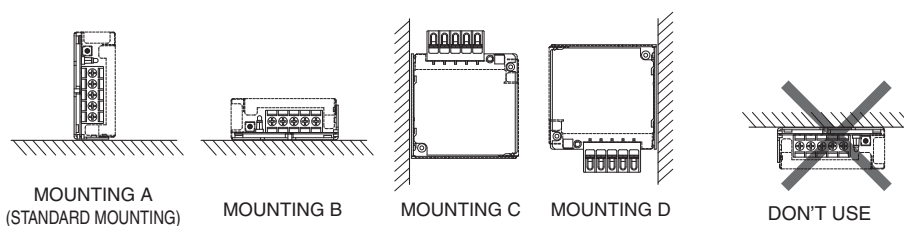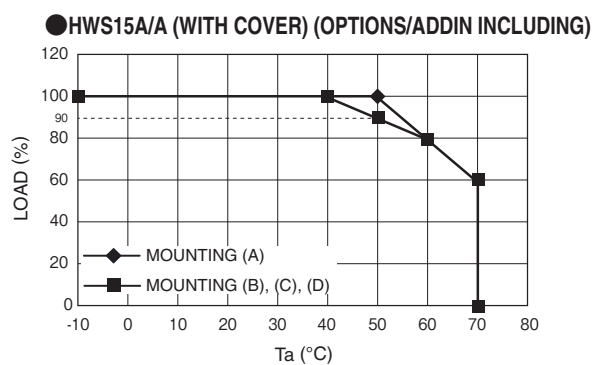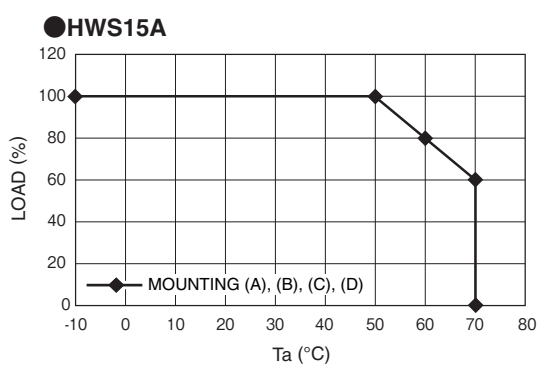

HWS30A SPECIFICATIONS (Read instruction manual carefully, before using the power supply unit.)

UNIT -
PC Board

ITEMS/UNITS			MODEL	HWS30A-3	HWS30A-5	HWS30A-12	HWS30A-15	HWS30A-24	HWS30A-48
Input	Input Voltage Range	(*2)	V	AC85 - 265 (47 - 63Hz) or DC120 - 370					
	Efficiency(100VAC) (typ)	(*1)	%	75	80	84	85	86	86
	Efficiency(200VAC) (typ)	(*1)	%	77	82	86	87	88	87
	Input Current (100/200VAC) (typ)	(*1)	A	0.5/0.3	0.65/0.4				
	Inrush Current (100/200VAC) (typ) (*1)(*3)	A	14/28 (Ta = 25℃ , Cold Start)						
	Leakage Current	(*9)	mA	Less than 0.5 (0.2 (typ) at 100VAC / 0.4 (typ) at 230VAC)					
Output	Nominal Output Voltage		VDC	3.3	5	12	15	24	48
	Maximum Output Current		A	6	6	2.5	2	1.3	0.65
	Maximum Output Power		W	20.0	30.0	30.0	30.0	31.2	31.2
	Maximum Line Regulation	(*5)	mV	20	20	48	60	96	192
	Maximum Load Regulation	(*6)	mV	40	40	96	120	150	240
	Temperature Coefficient			Less than 0.02% /℃					
	Maximum Ripple & Noise(0≤Ta≤70℃) (*4)	mV	120	120	150	150	150	200	
	Maximum Ripple & Noise(-10≤Ta<0℃) (*4)	mV	160	160	180	180	180	240	
	Hold-up Time (typ)	(*1)	ms	20					
	Output Voltage Range		VDC	2.97 - 3.96	4.0 - 6.0	9.6 - 14.4	12.0 - 18.0	19.2 - 28.8	38.4 - 52.8
Function	Over Current Protection	(*7)	A	6.3 —	6.3 —	2.62 —	2.1 —	1.36 —	0.68 —
	Over Voltage Protection	(*8)	VDC	4.13 - 4.95	6.25 - 7.25	15.0 - 17.4	18.8 - 21.8	30.0 - 34.8	55.2 - 64.8
	Remote Sensing			-					
	Remote ON/OFF			-					
	Parallel Operation			-					
	Series Operation			Possible					
	Line DIP			Designed to meet SEMI-F47 (200VAC Line only)					
Environment	Operating Temperature	(*10)	℃	-10 to +70 (-10 to +50℃ :100%, +60℃ :60%, +70℃ :40%)					
	Storage Temperature		℃	-30 to +85					
	Operating Humidity		% RH	30 - 90 (No Condensing)					
	Storage Humidity		% RH	10 - 95 (No Condensing)					
	Vibration			At no operating, 10-55Hz (Sweep for 1min) 19.6m/s ² Constant, X,Y,Z 1hour each.					
	Shock			Less than 196.1m/s ²					
	Cooling			Convection Cooling					
Isolation	Withstand Voltage			Input - FG : 2kVAC (20mA), Input - Output : 3kVAC (20mA) Output - FG : 500VAC (20mA) for 1min					
	Isolation Resistance			More than 100MΩ at 25℃ and 70%RH Output - FG : 500VDC					
Standards	Safety			Approved by UL62368-1, CSA62368-1, EN62368-1, UL60950-1, CSA60950-1, EN60950-1. (Expire date of 60950-1: 20/12/2020) Designed to meet Den-an Appendix 8 at 100VAC only. With cover type only: Approved by UL508, CSA C22.2 No.107.1-01.					
	PFHC			Designed to meet IEC61000-3-2					
	Conducted Emission, Radiated Emission	(*11)		Designed to meet EN55011/EN55032-B, FCC-B, VCCI-B					
	Immunity	(*11)		Designed to meet IEC61000-6-2 IEC61000-4-2, -3, -4, -5, -6, -8, -11					
Mechanical	Weight (typ)		g	200 (With cover: 240)					
	Size (W x H x D)		mm	26.5 x 82 x 95 (Refer to Outline Drawing)					

(*1) At 100VAC/200VAC, Ta=25°C, nominal voltage and maximum output power.

(*2) For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100 - 240VAC(50 - 60Hz).

(*3) Not applicable for the inrush current to Noise Filter for less than 0.2ms.

(*4) Measure with JEITA RC-9131B probe, Bandwidth of scope :100MHz.
For start up at low ambient temperature and low input voltage, output ripple noise might not meet specification.

However, specification can be met after one second.

(*5) 85 - 265VAC, constant load.

(*6) No load-Full load, constant input voltage.

(*7) Hiccup with automatic recovery. Avoid to operate at over load or short circuit condition.

(*8) OVP circuit will shut down output, manual reset (Re power on).

(*9) Measured by the each measuring method of UL, CSA, EN and Den-an (at 60Hz), Ta=25°C.

(*10) Output Derating


- Refer to Output Derating Curve.

- Load (%) is percent of maximum output power or maximum output current, do not exceed its derating of maximum load.

(*11) The power supply is considered a component which will be installed into a final equipment.

The final equipment should be re-evaluated that it meets EMC directives.

Recommended EMC Filter




RSEN-2003D or RSEN-2003

Please refer to "TDK-Lambda
EMC Filters" catalog.

Outline Drawing

UNIT
PC Board


[HWS30A]

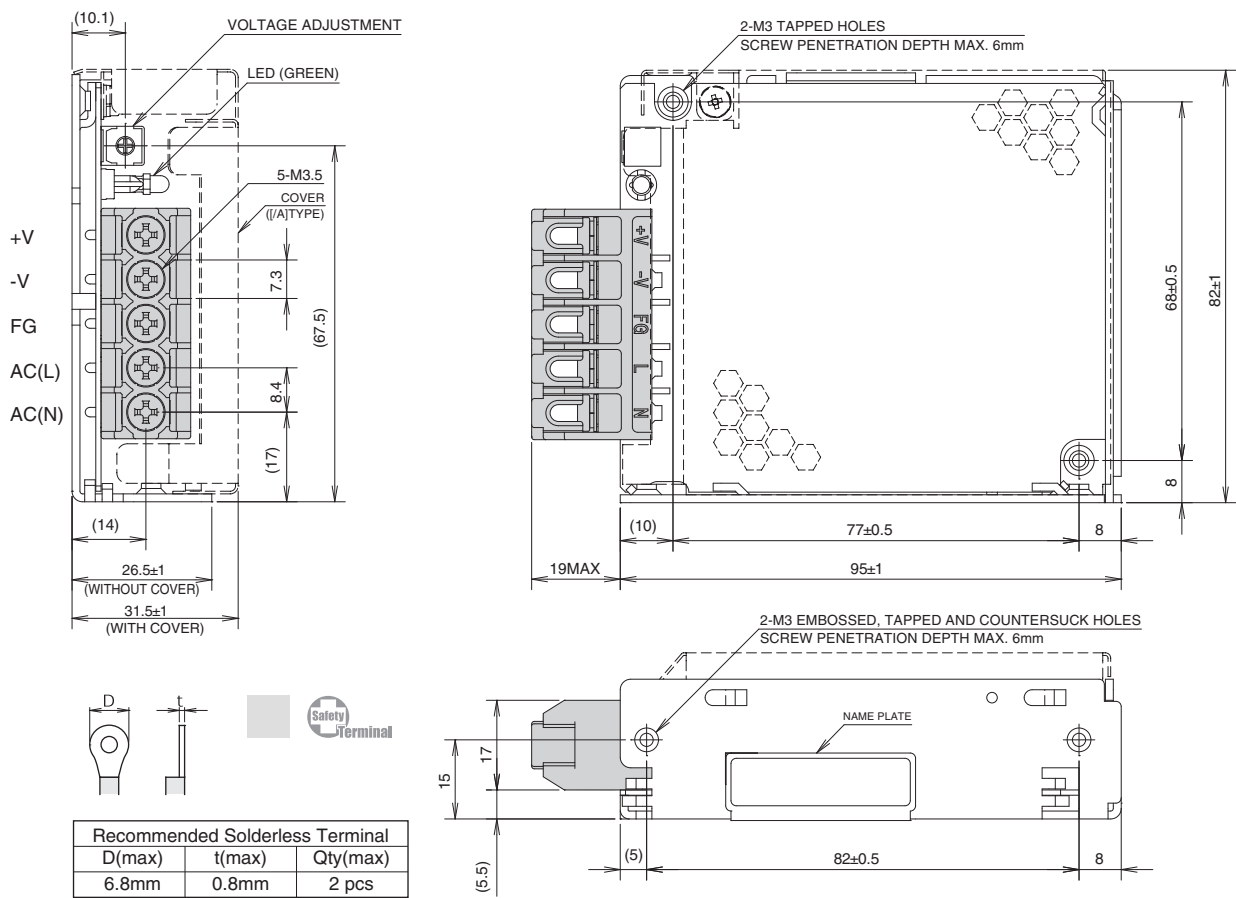

HWS-A

[unit: mm]

Output Derating

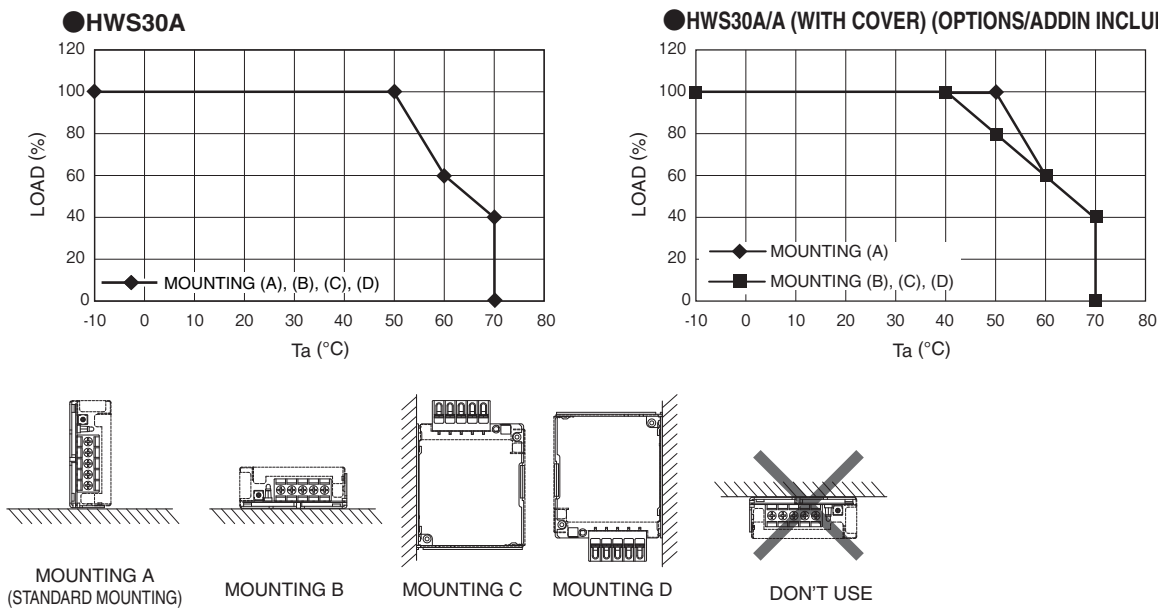

HWS50A SPECIFICATIONS (Read instruction manual carefully, before using the power supply unit.)

UNIT
PC Board

ITEMS/UNITS			MODEL	HWS50A-3	HWS50A-5	HWS50A-12	HWS50A-15	HWS50A-24	HWS50A-48
Input	Input Voltage Range	(*2)	V	AC85 - 265 (47 - 63Hz) or DC120 - 370					
	Power Factor(100/200VAC) (typ)	(*1)		0.96/0.85	0.97/0.91				
	Efficiency(100VAC) (typ)	(*1)	%	76	82	83	83	84	84
	Efficiency(200VAC) (typ)	(*1)	%	78	84	85	86	87	86
	Input Current (100/200VAC) (typ)	(*1)	A	0.45/0.25	0.65/0.35				
	Inrush Current (100/200VAC) (typ) (*1)(*3)		A	14/28 (Ta = 25℃ , Cold Start)					
	Leakage Current	(*9)	mA	Less than 0.5 (0.2 (typ) at 100VAC / 0.4 (typ) at 230VAC)					
Output	Nominal Output Voltage		VDC	3.3	5	12	15	24	48
	Maximum Output Current		A	10	10	4.3	3.5	2.2	1.1
	Maximum Output Power		W	33.0	50.0	51.6	52.5	52.8	52.8
	Maximum Line Regulation	(*5)	mV	20	20	48	60	96	192
	Maximum Load Regulation	(*6)	mV	40	40	96	120	150	240
	Temperature Coefficient			Less than 0.02% /℃					
	Maximum Ripple & Noise(0≤Ta≤70℃) (*4)		mV	120	120	150	150	150	200
	Maximum Ripple & Noise(-10≤Ta<0℃) (*4)		mV	160	160	180	180	180	240
	Hold-up Time (typ)	(*1)	ms	20					
Function	Output Voltage Range		VDC	2.97 - 3.96	4.0 - 6.0	9.6 - 14.4	12.0 - 18.0	19.2 - 28.8	38.4 - 52.8
	Over Current Protection	(*7)	A	10.5 —	10.5 —	4.51 —	3.67 —	2.31 —	1.15 —
	Over Voltage Protection	(*8)	VDC	4.13 - 4.95	6.25 - 7.25	15.0 - 17.4	18.8 - 21.8	30.0 - 34.8	55.2 - 64.8
	Remote Sensing			-					
	Remote ON/OFF			- (/R Option: Output ON in the external voltage is applied)					
	Parallel Operation			-					
	Series Operation			Possible					
	Line DIP			Designed to meet SEMI-F47 (200VAC Line only)					
Environment	Operating Temperature	(*10)	℃	-10 to +70 (-10 to +50℃ :100%, +60℃ :70%, +70℃ :40%)					
	Storage Temperature		℃	-30 to +85					
	Operating Humidity		% RH	30 - 90 (No Condensing)					
	Storage Humidity		% RH	10 - 95 (No Condensing)					
	Vibration			At no operating, 10-55Hz (Sweep for 1min) 19.6m/s ² Constant, X,Y,Z 1hour each.					
	Shock			Less than 196.1m/s ²					
	Cooling			Convection Cooling					
Isolation	Withstand Voltage			Input - FG : 2kVAC (20mA), Input - Output : 3kVAC (20mA) Output - FG : 500VAC (20mA) for 1min					
	Isolation Resistance			More than 100MΩ at 25℃ and 70%RH Output - FG : 500VDC					
Standards	Safety			Approved by UL62368-1, CSA62368-1, EN62368-1, UL60950-1, CSA60950-1, EN60950-1. (Expire date of 60950-1: 20/12/2020) Designed to meet Den-an Appendix 8 at 100VAC only. With cover type only: Approved by UL508, CSA C22.2 No.107.1-01.					
	PFHC			Designed to meet IEC61000-3-2					
	Conducted Emission, Radiated Emission	(*11)		Designed to meet EN55011/EN55032-B, FCC-B, VCCI-B					
	Immunity	(*11)		Designed to meet IEC61000-6-2 IEC61000-4-2, -3, -4, -5, -6, -8, -11					
	Weight (typ)		g	260 (With cover: 300)					
Mechanical	Size (W x H x D)		mm	26.5 x 82 x 120 (Refer to Outline Drawing)					

(*1) At 100VAC/200VAC, Ta=25°C , nominal output voltage and maximum output power.

(*2) For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100 - 240VAC(50 - 60Hz).

(*3) Not applicable for the inrush current to Noise Filter for less than 0.2ms.

(*4) Measure with JEITA RC-9131B probe, Bandwidth of scope :100MHz.

(*5) 85 - 265VAC, constant load.

(*6) No load-Full load, constant input voltage.

(*7) Hiccup with automatic recovery. Avoid to operate at over load or short circuit condition.

(*8) OVP circuit will shut down output, manual reset (Re power on).

(*9) Measured by the each measuring method of UL, CSA, EN and Den-an (at 60Hz), Ta=25°C .


(*10) Output Derating

- Refer to Output Derating Curve.

- Load (%) is percent of maximum output power or maximum output current, do not exceed its derating of maximum load.

(*11) The power supply is considered a component which will be installed into a final equipment.
The final equipment should be re-evaluated that it meets EMC directives.

Recommended EMC Filter




RSEN-2003D or RSEN-2003

Please refer to "TDK-Lambda
EMC Filters" catalog.

Outline Drawing

UNIT
PC Board

[HWS50A]

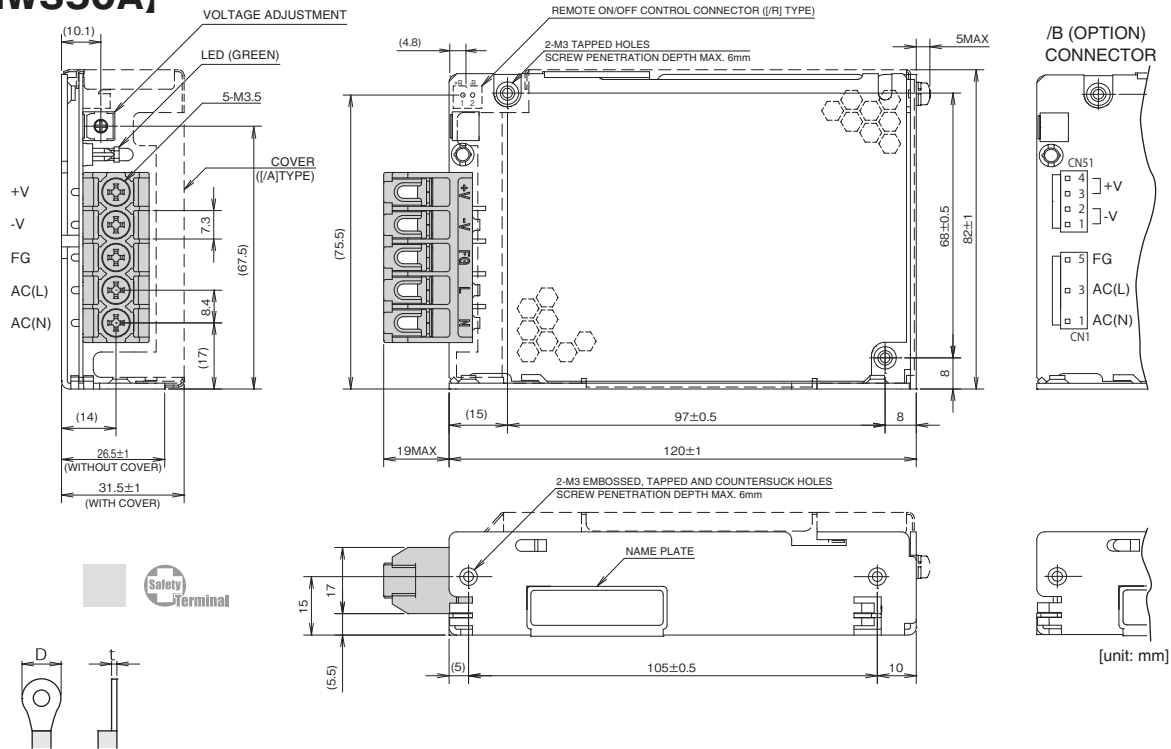

Recommended Solderless Terminal		
D(max)	t(max)	Qty(max)
6.8mm	0.8mm	2 pcs

/R (Option)

Remote ON / OFF control connector (JST)

PIN HEADER	B2B-XH-AM
SOCKET HOUSING	XHP-2
TERMINAL PINS	BXH-001T-P0.6 or SXH-001T-P0.6
HAND CRIMPING TOOL	YC-110R or YRS-110

※ Housing and terminal pin are not attached to the product.

/B (Option) Use connector

PART DESCRIPTION	PART NAME	MANUFACT	QTY
CONNECTOR INPUT SIDE(CN1)	B3P5-VH(LF)(SN)	JST	1
CONNECTOR OUTPUT SIDE(CN51)	B4P-VH(LF)(SN)	JST	1




※Output terminal, please use one pin per 5A below.

/B (Option) Recommended connector (it is not affixed to the product)

PART DESCRIPTION	PART NAME	MANUFACT	QTY
SOCKET HOUSING (CN1)	VHR-5N	JST	1
SOCKET HOUSING (CN51)	VHR-4N	JST	1
TERMINAL PINS (CN1,CN51)	BVH-21T-P1.1 or SVH-21T-P1.1	JST	7

HAND CRIMPING TOOL: YC-160R (JST)

Output Derating

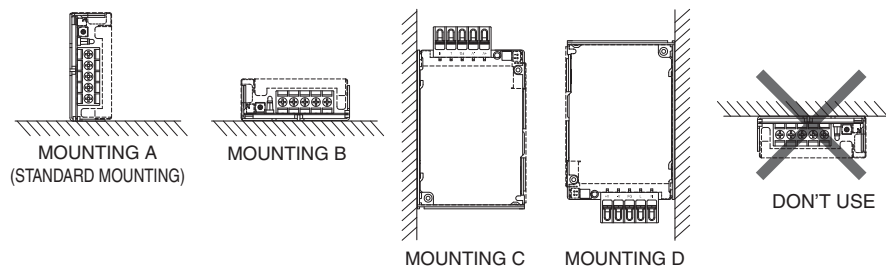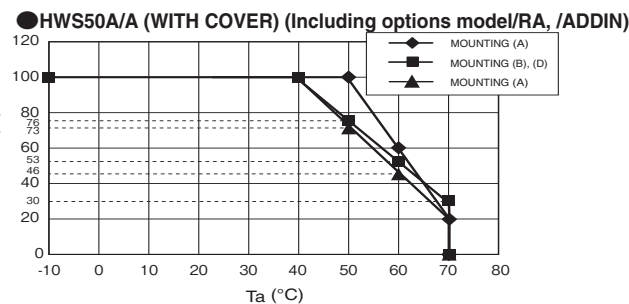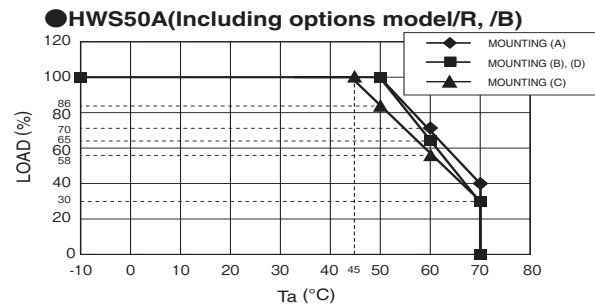

HWS80A SPECIFICATIONS (Read instruction manual carefully, before using the power supply unit.)

UNIT
PC Board

ITEMS/UNITS			MODEL	HWS80A-3	HWS80A-5	HWS80A-12	HWS80A-15	HWS80A-24	HWS80A-48
Input	Input Voltage Range	(*2)	V	AC85 - 265 (47 - 63Hz) or DC120 - 370					
	Power Factor(100/200VAC) (typ)	(*1)		0.96/0.87	0.98/0.91				
	Efficiency(100VAC) (typ)	(*1)	%	81	83	85	85	86	87
	Efficiency(200VAC) (typ)	(*1)	%	83	85	87	87	88	89
	Input Current (100/200VAC) (typ)	(*1)	A	0.72/0.36	1.04/0.52				
	Inrush Current (100/200VAC) (typ) (*1)(*3)		A	14/28 (Ta = 25℃ , Cold Start)					
	Leakage Current	(*9)	mA	Less than 0.5 (0.2 (typ) at 100VAC / 0.4 (typ) at 230VAC)					
Output	Nominal Output Voltage		VDC	3.3	5	12	15	24	48
	Maximum Output Current		A	16	16	6.7	5.4	3.4	1.7
	Maximum Output Power		W	52.8	80.0	80.4	81.0	81.6	81.6
	Maximum Line Regulation	(*5)	mV	20	20	48	60	96	192
	Maximum Load Regulation	(*6)	mV	40	40	96	120	150	240
	Temperature Coefficient			Less than 0.02% /℃					
	Maximum Ripple & Noise(0≤Ta≤70℃) (*4)		mV	120	120	150	150	150	200
	Maximum Ripple & Noise(-10≤Ta<0℃) (*4)		mV	160	160	180	180	180	240
	Hold-up Time (typ)	(*1)	ms	20					
	Output Voltage Range		VDC	2.97 - 3.96	4.0 - 6.0	9.6 - 14.4	12.0 - 18.0	19.2 - 28.8	38.4 - 52.8
Function	Over Current Protection	(*7)	A	16.8 —	16.8 —	7.04 —	5.67 —	3.57 —	1.79 —
	Over Voltage Protection	(*8)	VDC	4.13 - 4.95	6.25 - 7.25	15.0 - 17.4	18.8 - 21.8	30.0 - 34.8	55.2 - 64.8
	Remote Sensing			Possible					
	Remote ON/OFF			- (/R Option: Output ON in the external voltage is applied)					
	Parallel Operation			-					
	Series Operation			Possible					
	Line DIP			Designed to meet SEMI-F47(200VAC Line only)					
Environment	Operating Temperature	(*10)	℃	-10 ~ +70(-10 ~ +50℃ :100%, +60℃ :80%, +70℃ :60%)					
	Storage Temperature		℃	-30 to +85					
	Operating Humidity		% RH	30 - 90 (No Condensing)					
	Storage Humidity		% RH	10 - 95 (No Condensing)					
	Vibration			At no operating, 10-55Hz (Sweep for 1min) 19.6m/s ² Constant, X,Y,Z 1hour each.					
	Shock			Less than 196.1m/s ²					
	Cooling			Convection Cooling					
Isolation	Withstand Voltage			Input - FG : 2kVAC (20mA), Input - Output : 3kVAC (20mA) Output - FG : 500VAC (20mA) for 1min					
	Isolation Resistance			More than 100MΩ at 25℃ and 70%RH Output - FG : 500VDC					
Standards	Safety			Approved by UL62368-1, CSA62368-1, EN62368-1, UL60950-1, CSA60950-1, EN60950-1. (Expire date of 60950-1: 20/12/2020) Designed to meet Den-an Appendix 8 at 100VAC only. With cover type only: Approved by UL508, CSA C22.2 No.107.1-01.					
	PFHC			Designed to meet IEC61000-3-2					
	Conducted Emission, Radiated Emission	(*11)		Designed to meet EN55011/EN55032-B, FCC-B, VCCI-B					
	Immunity	(*11)		Designed to meet IEC61000-6-2 IEC61000-4-2, -3, -4, -5, -6, -8, -11					
Mechanical	Weight (typ)		g	420 (With cover: 470)					
	Size (W x H x D)		mm	28 x 82 x 160 (Refer to Outline Drawing)					

(*1) At 100VAC/200VAC, Ta=25°C , nominal output voltage and maximum output power.

(*2) For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100 - 240VAC(50 - 60Hz).

(*3) Not applicable for the inrush current to Noise Filter for less than 0.2ms.

(*4) Measure with JEITA RC-9131B probe, Bandwidth of scope :100MHz.

(*5) 85 - 265VAC, constant load.

(*6) No load-Full load, constant input voltage.

(*7) Constant current limit and hiccup with automatic recovery.

Avoid to operate at over load or short circuit condition.

(*8) OVP circuit will shut down output, manual reset (Re power on).

(*9) Measured by the each measuring method of UL, CSA, EN and Den-an (at 60Hz), Ta=25°C .

(*10) Output Derating


- Refer to Output Derating Curve.

- Load (%) is percent of maximum output power or maximum output current, do not exceed its derating of maximum load.

(*11) The power supply is considered a component which will be installed into a final equipment.

The final equipment should be re-evaluated that it meets EMC directives.

Recommended EMC Filter




RSEN-2003D or RSEN-2003
Please refer to "TDK-Lambda
EMC Filters" catalog.

Outline Drawing

UNIT
PC Board

[HWS80A]

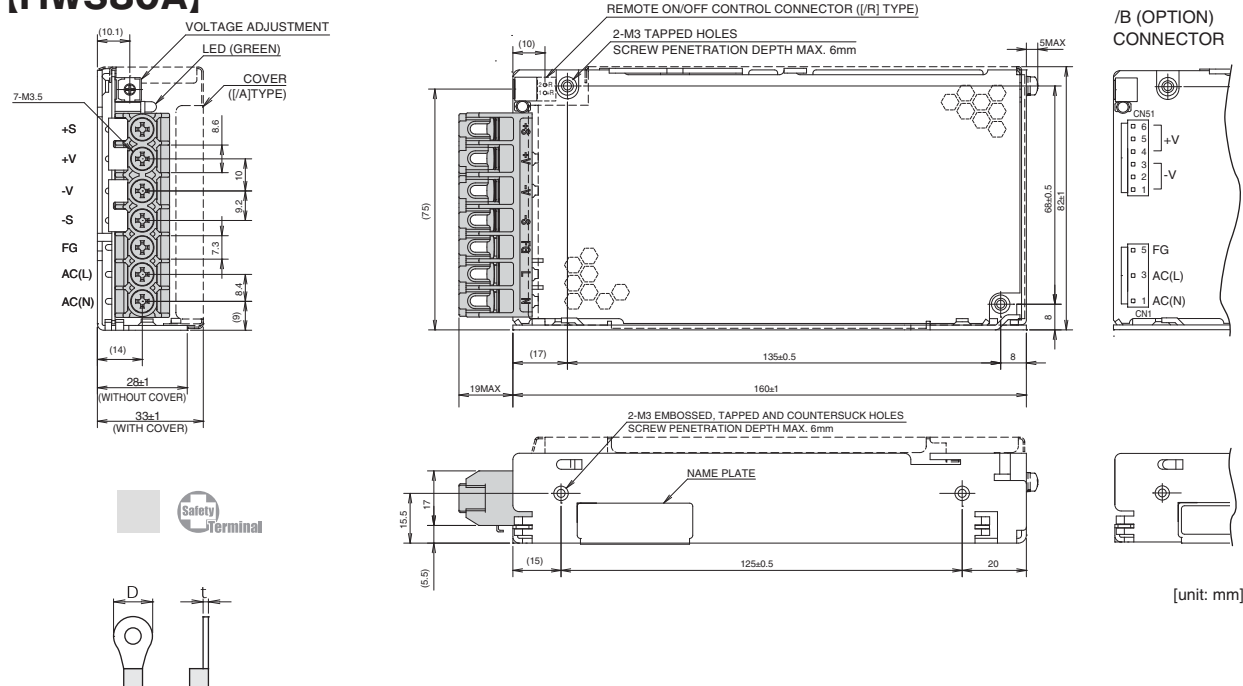

Terminal	Recommended Solderless Terminal		
	D(max)	t(max)	Qty(max)
+V / -V	8.1mm	0.8mm	2 pcs
Others		1.0mm	1 pcs
	6.8mm	0.8mm	2 pcs

/R (Option)	
Remote ON / OFF control connector (JST)	
PIN HEADER	B2B-XH-AM
SOCKET HOUSING	XHP-2
TERMINAL PINS	BXH-001T-P0.6 or SXH-001T-P0.6
HAND CRIMPING TOOL	YC-110R or YRS-110

※ Housing and terminal pin are not attached to the product.




/B (Option) Use connector			
PART DESCRIPTION	PART NAME	MANUFACT	QTY
CONNECTOR INPUT SIDE (CN1)	B3P5-VH (LF) (SN)	JST	1
CONNECTOR OUTPUT SIDE (CN51)	B4P-VH (LF) (SN)	JST	1

※ Output terminal, please use one pin per 5A below.

/B (Option) Recommended connector (it is not affixed to the product)			
PART DESCRIPTION	PART NAME	MANUFACT	QTY
SOCKET HOUSING (CN1)	VHR-5N	JST	1
SOCKET HOUSING (CN51)	VHR-6N	JST	1
TERMINAL PINS (CN1, CN51)	BVH-21T-P1.1 or SVH-21T-P1.1	JST	9

HAND CRIMPING TOOL: YC-160R (JST)

Output Derating

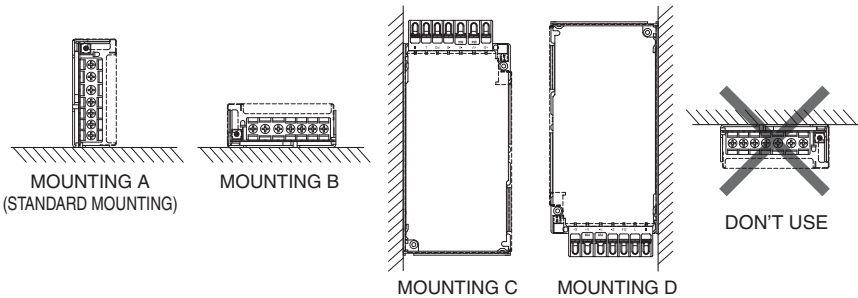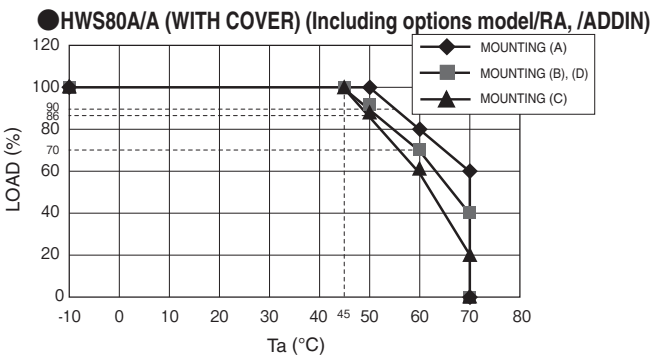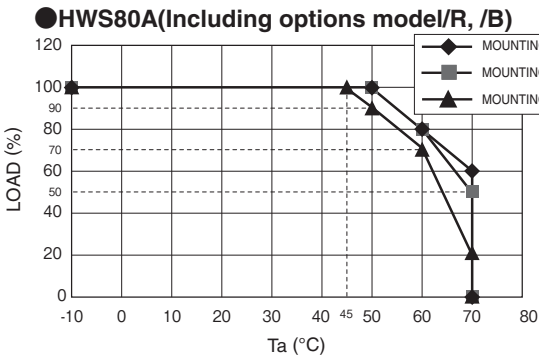

HWS100A SPECIFICATIONS (Read instruction manual carefully, before using the power supply unit.)

UNIT -
PC Board

HWS-A

ITEMS/UNITS			MODEL	HWS100A-3	HWS100A-5	HWS100A-12	HWS100A-15	HWS100A-24	HWS100A-48	
Input	Input Voltage Range	(*2)	V	AC85 - 265 (47 - 63Hz) or DC120 - 370						
	Power Factor(100/200VAC) (typ)	(*1)		0.96/0.89	0.98/0.93					
	Efficiency(100VAC) (typ)	(*1)	%	82	84	86	86	87	88	
	Efficiency(200VAC) (typ)	(*1)	%	84	86	88	88	89	90	
	Input Current (100/200VAC) (typ)	(*1)	A	0.9/0.45	1.3/0.65					
	Inrush Current (100/200VAC) (typ) (*1)(*3)	A	14/28 (Ta = 25℃ Cold Start)							
	Leakage Current	(*9)	mA	Less than 0.5 (0.2 (typ) at 100VAC / 0.4 (typ) at 230VAC)						
Output	Nominal Output Voltage		VDC	3.3	5	12	15	24	48	
	Maximum Output Current		A	20	20	8.5	7	4.5	2.1	
	Maximum Output Power		W	66.0	100.0	102.0	105.0	108.0	100.8	
	Maximum Line Regulation (*5)	mV	20	20	48	60	96	192		
	Maximum Load Regulation (*6)	mV	40	40	96	120	150	240		
	Temperature Coefficient		Less than 0.02% /℃							
	Maximum Ripple & Noise(0≤Ta≤70℃) (*4)	mV	120	120	150	150	150	200		
	Maximum Ripple & Noise(-10≤Ta<0℃) (*4)	mV	160	160	180	180	180	240		
	Hold-up Time (typ) (*1)	ms	20							
	Output Voltage Range		VDC	2.97 - 3.96	4.0 - 6.0	9.6 - 14.4	12.0 - 18.0	19.2 - 28.8	38.4 - 52.8	
Function	Over Current Protection (*7)	A	21.0 —	21.0 —	8.92 —	7.35 —	4.72 —	2.20 —		
	Over Voltage Protection (*8)	VDC	4.13 - 4.95	6.25 - 7.25	15.0 - 17.4	18.8 - 21.8	30.0 - 34.8	55.2 - 64.8		
	Remote Sensing		Possible							
	Remote ON/OFF		- (/R Option: Output ON in the external voltage is applied)							
	Parallel Operation		-							
	Series Operation		Possible							
	Line DIP		Designed to meet SEMI-F47 (200VAC Line only)							
	Operating Temperature (*10)	℃	-10 to +70 (-10 to +50℃ :100%, +60℃ :65%, +70℃ :30%)							
Environment	Storage Temperature	℃	-30 to +85							
	Operating Humidity	% RH	30 - 90 (No Condensing)							
	Storage Humidity	% RH	10 - 95 (No Condensing)							
	Vibration		At no operating, 10-55Hz (Sweep for 1min) 19.6m/s ² Constant, X,Y,Z 1hour each.							
	Shock		Less than 196.1m/s ²							
	Cooling		Convection Cooling							
	Withstand Voltage		Input - FG : 2kVAC (20mA), Input - Output : 3kVAC (20mA) Output - FG : 500VAC (20mA) for 1min							
	Isolation Resistance		More than 100MΩ at 25℃ and 70%RH Output - FG : 500VDC							
Standards	Safety		Approved by UL62368-1, CSA62368-1, EN62368-1, UL60950-1, CSA60950-1, EN60950-1. (Expire date of 60950-1: 20/12/2020) Designed to meet Den-an Appendix 8 at 100VAC only. With cover type only: Approved by UL508, CSA C22.2 No.107.1-01.							
	PFHC		Designed to meet IEC61000-3-2							
	Conducted Emission, Radiated Emission (*11)		Designed to meet EN55011/EN55032-B, FCC-B, VCCI-B							
	Immunity (*11)		Designed to meet IEC61000-6-2 IEC61000-4-2, -3, -4, -5, -6, -8, -11							
	Weight (typ)		g	420 (With cover: 470)						
Mechanical	Size (W x H x D)		mm	28 x 82 x 160 (Refer to Outline Drawing)						

(*1) At 100VAC/200VAC, Ta=25°C, nominal output voltage and maximum output power.

(*2) For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100 - 240VAC(50 - 60Hz).

(*3) Not applicable for the inrush current to Noise Filter for less than 0.2ms.

(*4) Measure with JEITA RC-9131B probe, Bandwidth of scope :100MHz.

(*5) 85 - 265VAC, constant load.

(*6) No load-Full load, constant input voltage.

(*7) Constant current limit and hiccup with automatic recovery.

Avoid to operate at over load or short circuit condition.

(*8) OVP circuit will shut down output, manual reset (Re power on).

(*9) Measured by the each measuring method of UL, CSA, EN and Den-an (at 60Hz), Ta=25°C.

(*10) Output Derating


- Refer to Output Derating Curve.

- Load (%) is percent of maximum output power or maximum output current, do not exceed its derating of maximum load.

(*11) The power supply is considered a component which will be installed into a final equipment.

The final equipment should be re-evaluated that it meets EMC directives.

Recommended EMC Filter




RSEN-2003D or RSEN-2003
Please refer to "TDK-Lambda
EMC Filters" catalog.

Outline Drawing

UNIT
PC Board

[HWS100A]

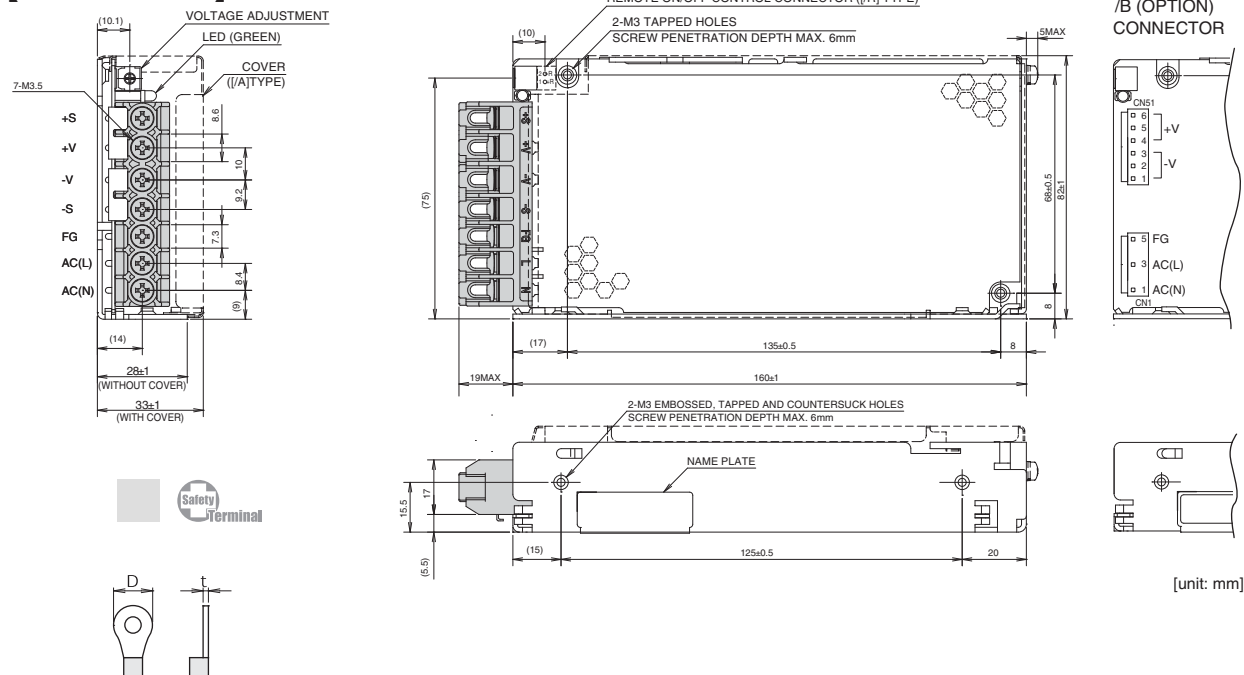

HWS-A

Terminal	Recommended Solderless Terminal		
	D(max)	t(max)	Qty(max)
+V / -V	8.1mm	0.8mm	2 pcs
Others		1.0mm	1 pcs
	6.8mm	0.8mm	2 pcs

/R (Option)	
Remote ON / OFF control connector (JST)	
PIN HEADER	B2B-XH-AM
SOCKET HOUSING	XHP-2
TERMINAL PINS	BXH-001T-P0.6 or SXH-001T-P0.6
HAND CRIMPING TOOL	YC-110R or YRS-110

※ Housing and terminal pin are not attached to the product.



/B (Option) Use connector			
PART DESCRIPTION	PART NAME	MANUFACT	QTY
CONNECTOR INPUT SIDE(CN1)	B3P5-VH(LF)(SN)	JST	1
CONNECTOR OUTPUT SIDE(CN51)	B4P-VH(LF)(SN)	JST	1

※Output terminal, please use one pin per 5A below.


/B (Option) Recommended connector (it is not affixed to the product)			
PART DESCRIPTION	PART NAME	MANUFACT	QTY
SOCKET HOUSING (CN1)	VHR-5N	JST	1
SOCKET HOUSING (CN51)	VHR-6N	JST	1
TERMINAL PINS (CN1, CN51)	BVH-21T-P1.1 or SVH-21T-P1.1	JST	9

HAND CRIMPING TOOL: YC-160R (JST)

Output Derating

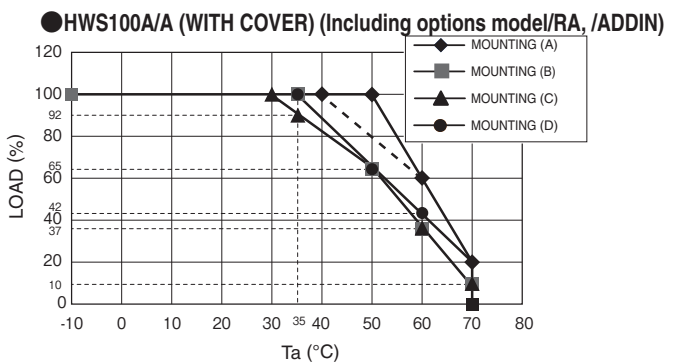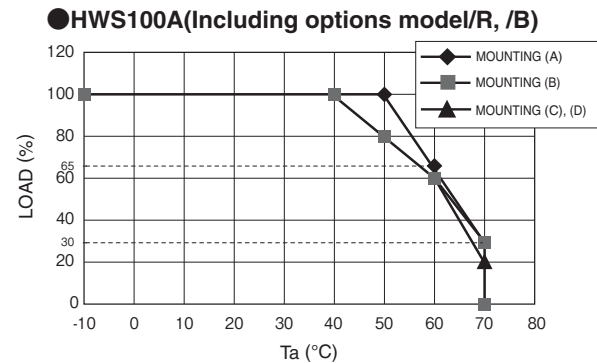

* Refer to dotted line for output derating curve, when input voltage range is "85VAC ≤ Vin < 90VAC" for the Mounting (A).

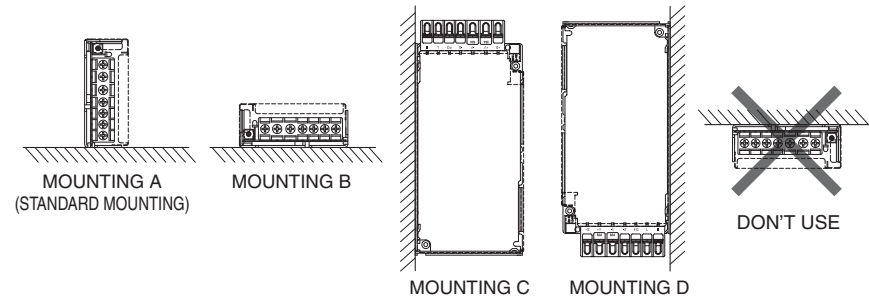

HWS150A SPECIFICATIONS (Read instruction manual carefully, before using the power supply unit.)

ITEMS/UNITS			MODEL	HWS150A-3	HWS150A-5	HWS150A-12	HWS150A-15	HWS150A-24	HWS150A-48
Input	Input Voltage Range	(*2)	V	AC85 - 265 (47 - 63Hz) or DC120 - 370					
	Power Factor(100/200VAC) (typ)	(*1)		0.96/0.89	0.98/0.93				
	Efficiency(100VAC) (typ)	(*1)	%	82	85	85	86	88	89
	Efficiency(200VAC) (typ)	(*1)	%	84	87	88	89	90	91
	Input Current (100/200VAC) (typ)	(*1)	A	1.3/0.65	1.9/0.95				
	Inrush Current (100/200VAC) (typ) (*1)(*3)		A	14/28 (Ta = 25℃ , Cold Start)					
	Leakage Current	(*9)	mA	Less than 0.5 (0.2 (typ) at 100VAC / 0.4 (typ) at 230VAC)					
Output	Nominal Output Voltage		VDC	3.3	5	12	15	24	48
	Maximum Output Current		A	30	30	13	10	6.5	3.3
	Maximum Output Power		W	99.0	150.0	156.0	150.0	156.0	158.4
	Maximum Line Regulation	(*5)	mV	20	20	48	60	96	192
	Maximum Load Regulation	(*6)	mV	40	40	96	120	150	240
	Temperature Coefficient			Less than 0.02% /℃					
	Maximum Ripple & Noise(0≤Ta≤70℃) (*4)		mV	120	120	150	150	150	200
	Maximum Ripple & Noise(-10≤Ta<0℃) (*4)		mV	160	160	180	180	180	240
	Hold-up Time (typ)	(*1)	ms	20					
	Output Voltage Range		VDC	2.97 - 3.96	4.0 - 6.0	9.6 - 14.4	12.0 - 18.0	19.2 - 28.8	38.4 - 52.8
Function	Over Current Protection	(*7)	A	31.5 —	31.5 —	13.6 —	10.5 —	6.82 —	3.46 —
	Over Voltage Protection	(*8)	VDC	4.13 - 4.95	6.25 - 7.25	15.0 - 17.4	18.8 - 21.8	30.0 - 34.8	55.2 - 64.8
	Remote Sensing			Possible					
	Remote ON/OFF			- (/R Option: Output ON in the external voltage is applied)					
	Parallel Operation			-					
	Series Operation			Possible					
	Line DIP			Designed to meet SEMI-F47 (200VAC Line only)					
	Operating Temperature	(*10)	℃	-10 to +70 (-10 to +50℃ :100%, +60℃ :60%, +70℃ :20%)					
Storage Temperature		℃	-30 to +85						
Environment	Operating Humidity		% RH	30 - 90 (No Condensing)					
	Storage Humidity		% RH	10 - 95 (No Condensing)					
	Vibration			At no operating, 10-55Hz (Sweep for 1min) 19.6m/s ² Constant, X,Y,Z 1hour each.					
	Shock			Less than 196.1m/s ²					
	Cooling			Convection Cooling					
	Withstand Voltage			Input - FG : 2kVAC (20mA), Input - Output : 3kVAC (20mA) Output - FG : 500VAC (20mA) for 1min					
	Isolation Resistance			More than 100MΩ at 25℃ and 70%RH Output - FG : 500VDC					
Standards	Safety			Approved by UL62368-1, CSA62368-1, EN62368-1, UL60950-1, CSA60950-1, EN60950-1. (Expire date of 60950-1: 20/12/2020) Designed to meet Den-an Appendix 8 at 100VAC only. With cover type only: Approved by UL508, CSA C22.2 No.107.1-01.					
	PFHC			Designed to meet IEC61000-3-2					
	Conducted Emission, Radiated Emission	(*11)		Designed to meet EN55011/EN55032-B, FCC-B, VCCI-B					
	Immunity	(*11)		Designed to meet IEC61000-6-2 IEC61000-4-2, -3, -4, -5, -6, -8, -11					
Mechanical	Weight (typ)		g	470 (With cover: 520)					
	Size (W x H x D)		mm	37 x 82 x 160 (Refer to Outline Drawing)					

(*1) At 100VAC/200VAC, Ta=25°C, nominal output voltage and maximum output power.

(*2) For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100 - 240VAC(50 - 60Hz).

(*3) Not applicable for the inrush current to Noise Filter for less than 0.2ms.

(*4) Measure with JEITA RC-9131B probe, Bandwidth of scope :100MHz.

(*5) 85 - 265VAC, constant load.

(*6) No load-Full load, constant input voltage.

(*7) Constant current limit and hiccup with automatic recovery.
Avoid to operate at over load or short circuit condition.

(*8) OVP circuit will shut down output, manual reset (Re power on).

(*9) Measured by the each measuring method of UL, CSA, EN and Den-an (at 60Hz), Ta=25°C.

(*10) Output Derating


- Refer to Output Derating Curve.

- Load (%) is percent of maximum output power or maximum output current, do not exceed its derating of maximum load.

(*11) The power supply is considered a component which will be installed into a final equipment.

The final equipment should be re-evaluated that it meets EMC directives.

Recommended EMC Filter




RSEN-2003D or RSEN-2003
Please refer to "TDK-Lambda
EMC Filters" catalog.

Outline Drawing

UNIT
PC Board

[HWS150A]

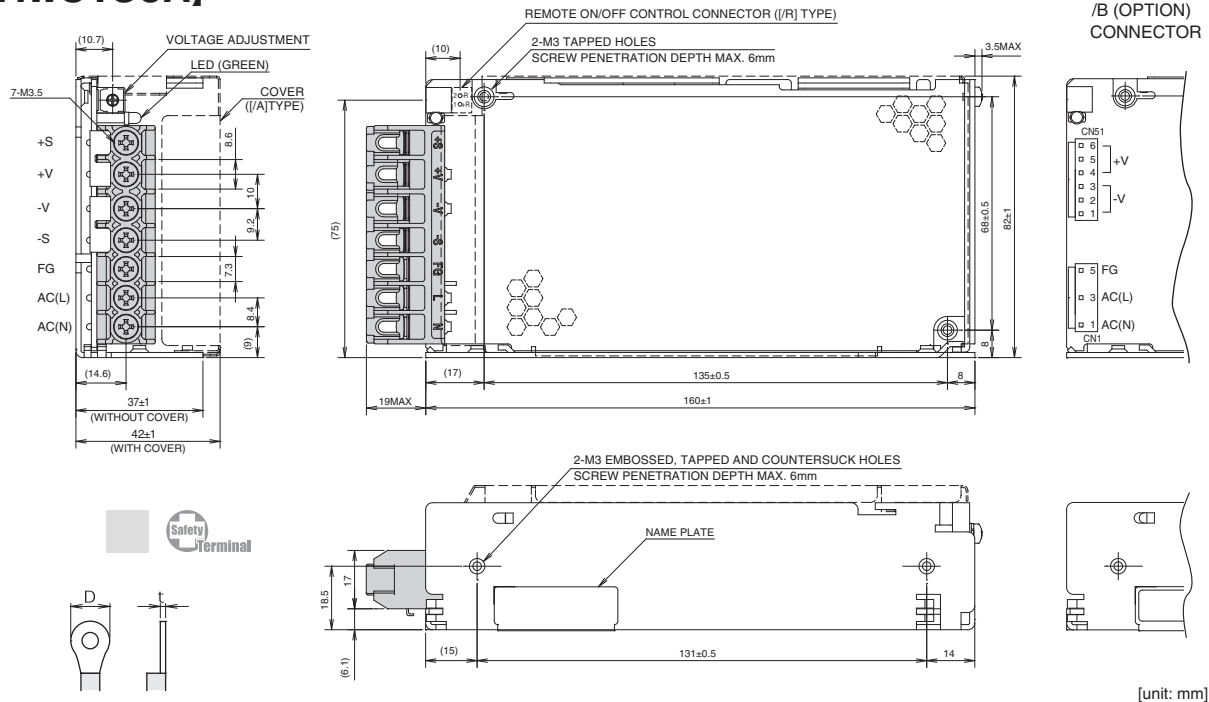

HWS-A

Terminal	Recommended Solderless Terminal		
	D(max)	t(max)	Qty(max)
+V / -V	8.1mm	0.8mm	2 pcs
Others	6.8mm	1.0mm	1 pcs
Others	6.8mm	0.8mm	2 pcs

/R (Option)
Remote ON / OFF control connector (JST)

PIN HEADER	B2B-XH-AM
SOCKET HOUSING	XHP-2
TERMINAL PINS	BXH-001T-P0.6 or SXH-001T-P0.6
HAND CRIMPING TOOL	YC-110R or YRS-110

※ Housing and terminal pin are not attached to the product.

/B (Option) Use connector

PART DESCRIPTION	PART NAME	MANUFACT	QTY
CONNECTOR INPUT SIDE(CN1)	B3P5-VH(LF)(SN)	JST	1
CONNECTOR OUTPUT SIDE(CN51)	B6P-VH(LF)(SN)	JST	1



※Output terminal, please use one pin per 5A below.

/B (Option) Recommended connector (it is not affixed to the product)


PART DESCRIPTION	PART NAME	MANUFACT	QTY
SOCKET HOUSING (CN1)	VHR-5N	JST	1
SOCKET HOUSING (CN51)	VHR-6N	JST	1
TERMINAL PINS (CN1,CN51)	BVH-21T-P1.1 or SVH-21T-P1.1	JST	9

HAND CRIMPING TOOL: YC-160R (JST)

Output Derating

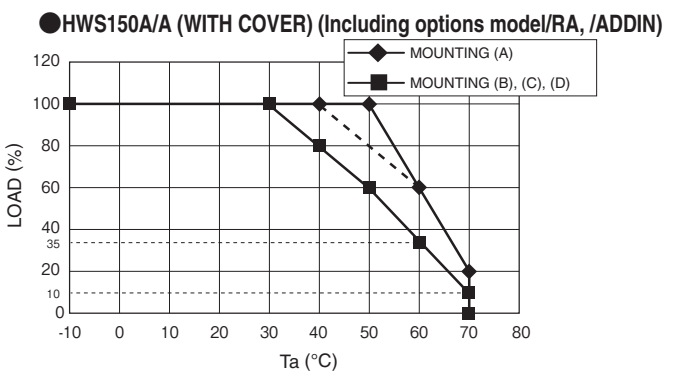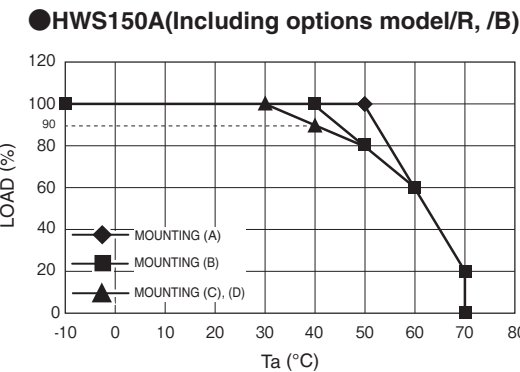

* In the case of using at the input voltage range "85 VAC ≤ Vin <90VAC", output derating will be dashed line. (Mounting direction(A) only)

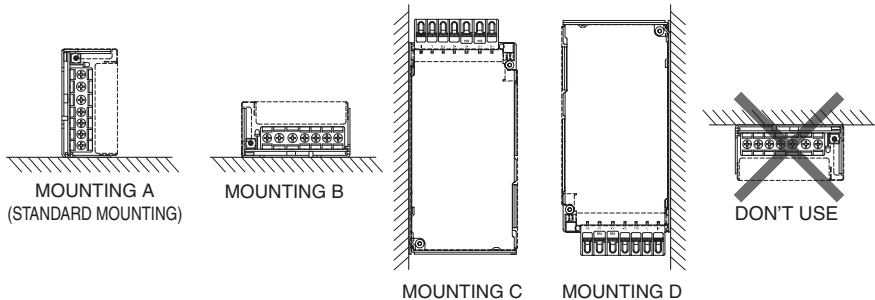


TDK·Lambda


Block Diagram

UNIT
PC Board


[HWS15A, HWS30A]

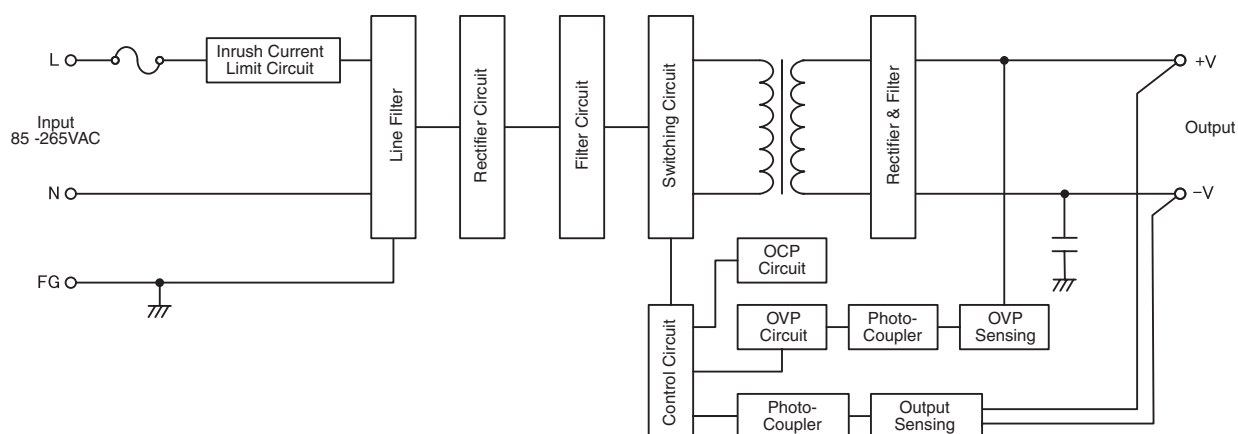

[HWS50A]

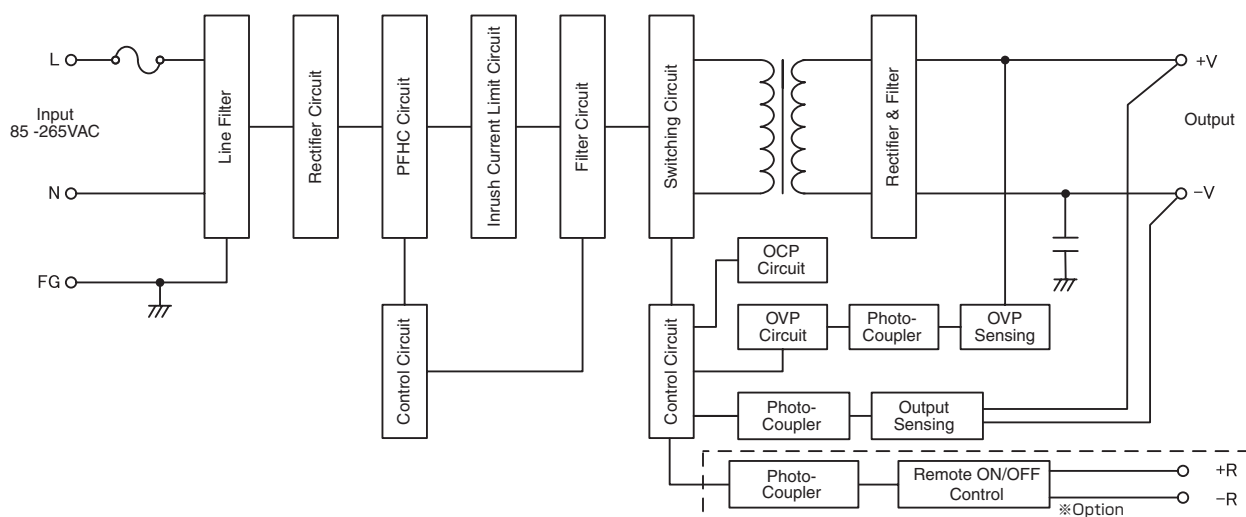

[HWS80A - HWS150A]

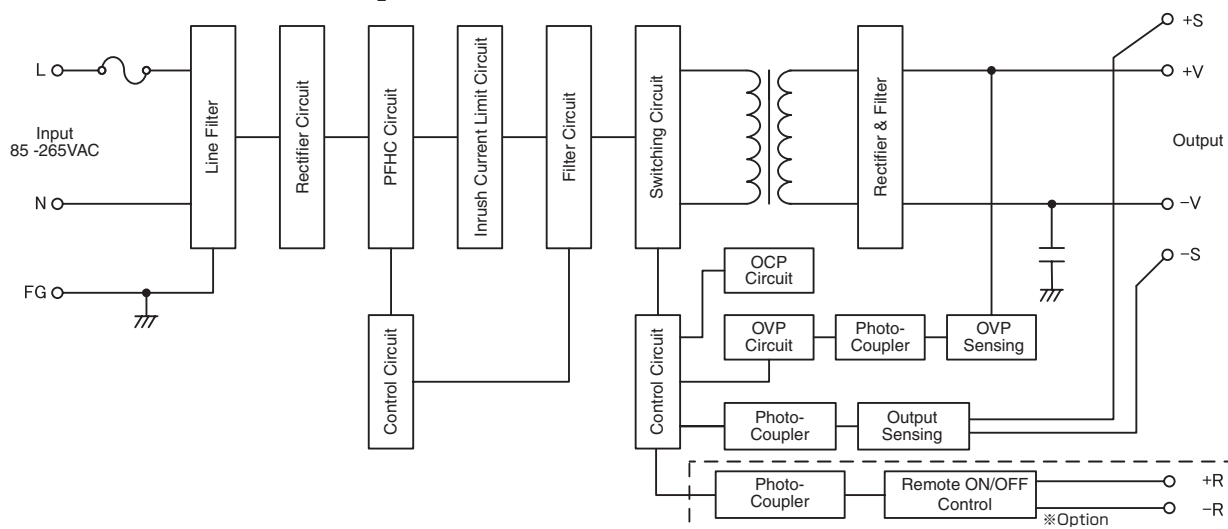


● Fuse rating :
 HWS15A: 2A
 HWS30A-100A: 3.15A
 HWS150A: 5A


● Circuit topology, switching frequency
 HWS15A-50A: Flyback topology 100kHz (fixed)
 HWS80A-150A: Cascade forward topology 120kHz (fixed)
 PFHC circuit : active filter 65kHz (fixed)

Sequence Time Chart

[HWS15A, HWS30A]

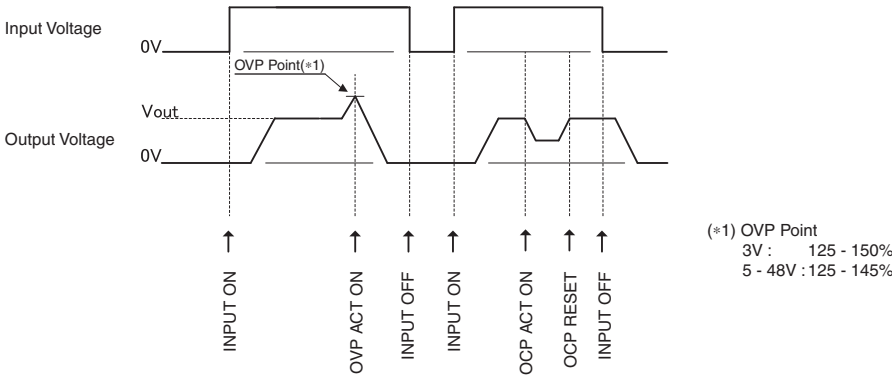

[HWS50A - HWS150A]

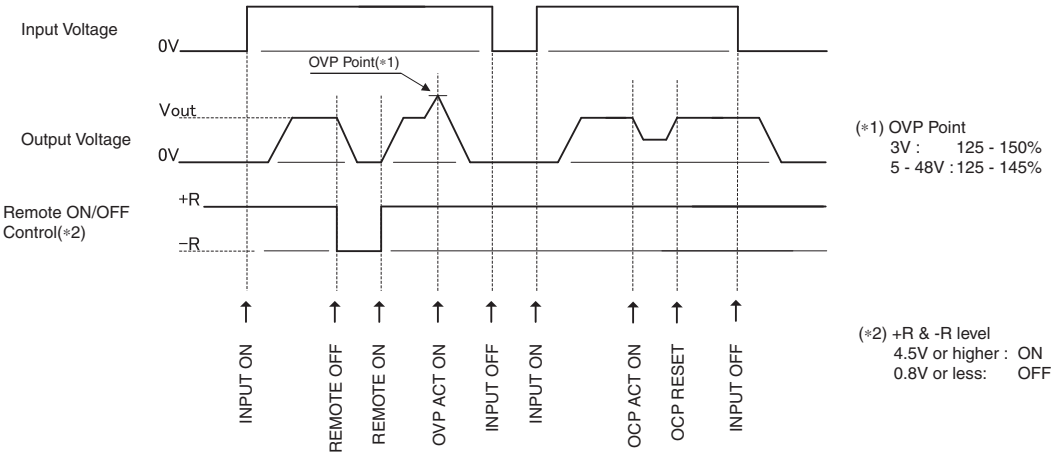

HWS15A, 30A, 50A, 80A, 100A, 150A Instruction ManualUNIT ·
PC Board

Be sure to read this instruction manual thoroughly before using this product. Pay attention to all cautions and warnings before using this product.

HWS15A ~ 150A Instruction Manual

https://product.tdk.com/info/en/documents/instruction_manual/hws-a_apl.pdf

HWS-A
取扱説明

Catalog Usage Precautions

Please observe the following points when using this catalog for power supplies and related products of TDK-Lambda Corporation (hereafter referred to simply as "our products"). Be sure to carefully read all precautions stated below before beginning to use our products.

1. The contents of this catalog are subject to change without notice, for example related to product improvements and other instances. Always check the latest information before deciding on a product.
2. Our products are designed and manufactured under the assumption that they will be used as integrated power supplies for normal industrial applications. They are not designed and manufactured for use in high-safety applications (applications requiring very high reliability and safety levels, where a reliability or safety problem could directly involve the risk of serious injury or death). If the customer decides to use our products in a high-safety application, appropriate fail-safe design features must be provided (such as incorporating protective circuitry and/or protective equipment in the system, or incorporating redundancy in the system so that a single failure cannot lead to instability). TDK-Lambda Corporation does not assume liability for any claims or damages either by the customer or third parties arising from the use of our products for high-safety applications.
3. When designing equipment in which our products are to be used, as well as peripheral circuitry for such equipment, always observe the "Product Usage Precautions" noted in this catalog and/or the product documentation and ensure that maximum ratings, power supply voltage range, operation temperature range and other specifications are not exceeded. TDK-Lambda Corporation does not assume liability for any claims or damages arising from the use of our products in a way that exceeds specifications, or from a type of usage indicated as unsuitable for the respective product in this catalog.
4. The operation outline and usage descriptions given in this catalog are examples. Before actual use of a product, all external factors must be examined carefully in order to ensure appropriate circuit and implementation design. TDK-Lambda Corporation does not assume liability for any claims or damages arising from indirect problems such as EMI or mechanical effects from our products.
5. The technical information included in this catalog is intended only for the purpose of illustrating representative operation or application of our products. It does not imply any guarantee or granting of license for intellectual property rights or other rights held either by TDK-Lambda Corporation or third parties. TDK-Lambda Corporation does not assume liability for any problems with third parties related to intellectual property rights arising from the use of our products.
6. Products listed in this catalog may require export permission or authorization in compliance with the Foreign Exchange and Foreign Trade Act.
7. The contents of this catalog may not be reproduced or copied without permission by TDK-Lambda Corporation.
8. For any inquiries regarding this catalog, please contact the Sales Department of TDK-Lambda Corporation.

Please see the Web of relevant companies for latest updates.

*1. Note that the contents of this catalog may be changed without prior warning. Be sure to read catalogs and instruction manuals for each product before using them. For accuracy purposes, please ask for specifications, and check contents.

*2. All included company names, products names and service marks, etc., are the trademarks or registered trademarks of TDK, TDK-Lambda or their subsidiaries in Japan and other countries. Note that the registered mark ® or TM are not used in this material, excluding one section.

*3. The TDK logo is the registered trademark of TDK Corporation.



<https://www.tdk-lambda.com/en/>

TDK-Lambda Corporation

Nihonbashi Takashimaya Mitsui Bldg.
2-5-1 Nihonbashi, Chuo-ku, Tokyo 103-6128, JAPAN

HWS-A_1905E