

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT

 $\Theta_Y =$

ALL RIGHTS RESERVED.

LOC

AD

DIST	
------	--

00

REVISIONS

P	
---	--

LTR

DESCRIPTION

DAT

DWRN

APVE

6

REVI



SED E

ER EC

23APR201

NK

MM

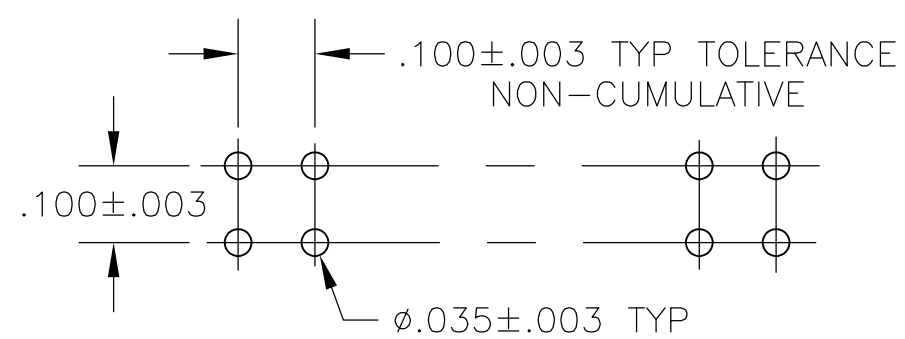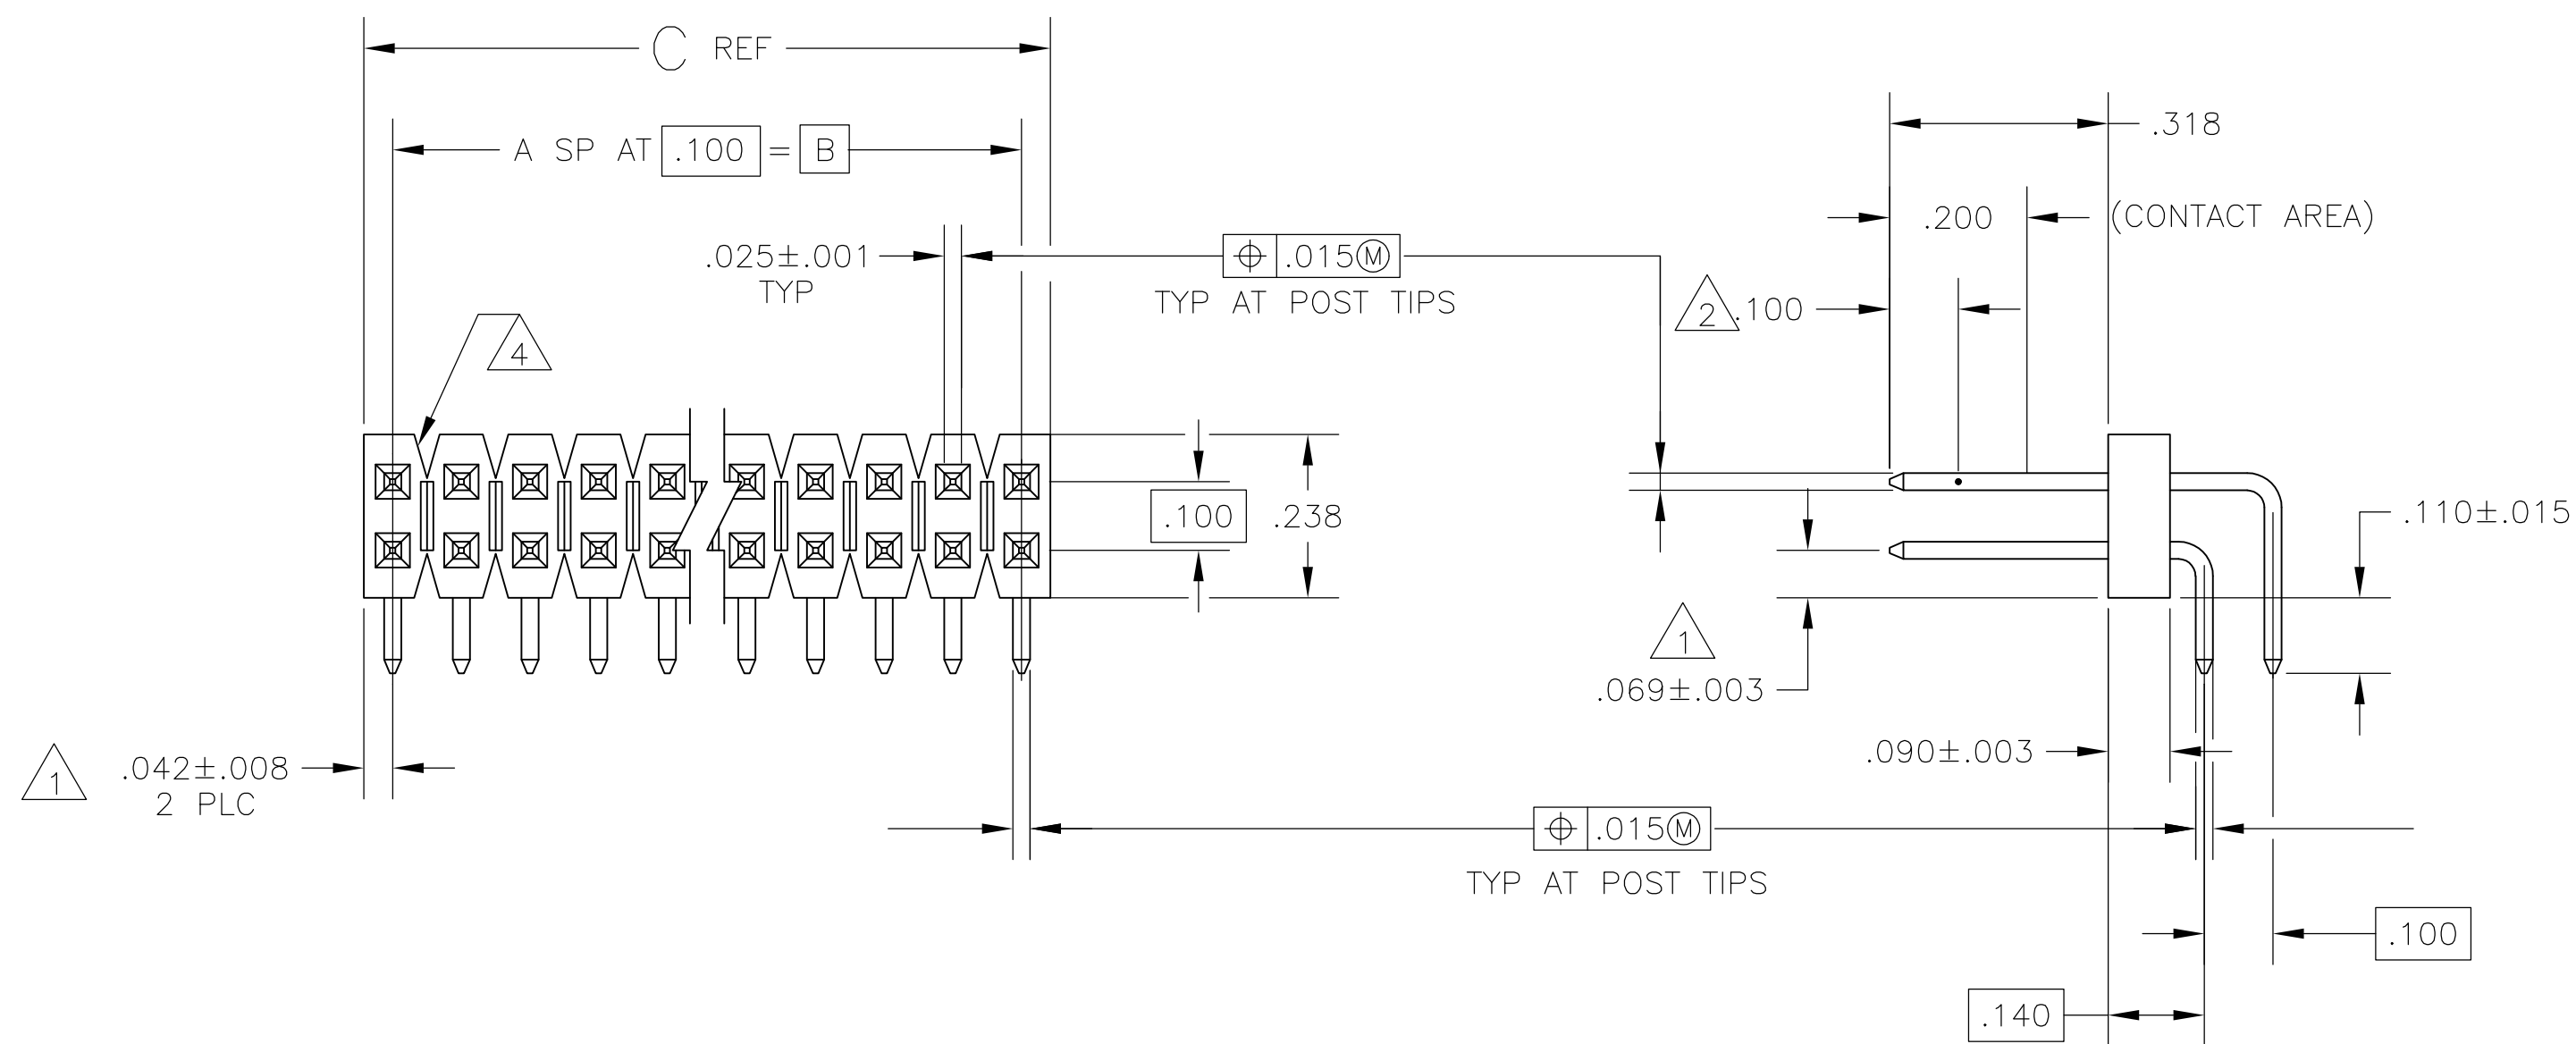

RECOMMENDED HOLE LAYOUT

①	THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
②	POINT OF MEASUREMENT FOR PLATING THICKNESS.
3	ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
④	BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
⑤	OBsolete PARTS: OBsolete CIS STREAMLINING PER D.RENAUD/D.SINISI

			3.984	3.900	39	80	4-102979-0
			3.884	3.800	38	78	3-102979-9
			3.784	3.700	37	76	3-102979-8
			3.684	3.600	36	74	3-102979-7
			3.584	3.500	35	72	3-102979-6
			3.484	3.400	34	70	3-102979-5
			3.384	3.300	33	68	3-102979-4
			3.284	3.200	32	66	3-102979-3
			3.184	3.100	31	64	3-102979-2
			3.084	3.000	30	62	3-102979-1
			2.984	2.900	29	60	3-102979-0
			2.884	2.800	28	58	2-102979-9
			2.784	2.700	27	56	2-102979-8
			2.684	2.600	26	54	2-102979-7
⚠	SUPERSEDED BY 7-146309-6		2.584	2.500	25	52	2-102979-6
			2.484	2.400	24	50	2-102979-5
			2.384	2.300	23	48	2-102979-4
			2.284	2.200	22	46	2-102979-3
			2.184	2.100	21	44	2-102979-2
			2.084	2.000	20	42	2-102979-1
			1.984	1.900	19	40	2-102979-0
			1.884	1.800	18	38	1-102979-9
			1.784	1.700	17	36	1-102979-8
			1.684	1.600	16	34	1-102979-7
			1.584	1.500	15	32	1-102979-6
			1.484	1.400	14	30	1-102979-5
			1.384	1.300	13	28	1-102979-4
			1.284	1.200	12	26	1-102979-3
⚠	OBSELETE		1.184	1.100	11	24	1-102979-2
⚠	SUPERSEDED BY 6-146309-0		1.084	1.000	10	22	1-102979-1
⚠	OBSELETE		.984	.900	9	20	1-102979-0
			.884	.800	8	18	102979-9
			.784	.700	7	16	102979-8
⚠	OBSELETE		.684	.600	6	14	102979-7
⚠	SUPERSEDED BY 5-146309-8		.584	.500	5	12	102979-6
			.484	.400	4	10	102979-5
⚠	SUPERSEDED BY 5-146309-4		.384	.300	3	8	102979-4
⚠	OBSELETE		.284	.200	2	6	102979-3
⚠	SUPERSEDED BY 5-146309-2		.184	.100	1	4	102979-2
⚠	OBSELETE		.084	—	—	2	102979-1

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN H. MOLL	25SEP187	 TE Connectivity			
			CHK T. CLARK	20C187				
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME	HEADER ASSY, MOD II, BREAKAWAY, DOUBLE ROW, .100X.100 CL, RIGHT ANGLE WITH .025 SQ POSTS		
INCHES		APVD T. CLARK	20C187					
	0 PLC ± .	PRODUCT SPEC						
	1 PLC ± .	—						
	2 PLC ± .005	APPLICATION SPEC						
	3 PLC ± .				SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
MATERIAL	FINISH	WEIGHT	—	A1	00779	C-102979	—	
HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK	2000000 GOLD IN THE CONTACT AREA, .00100X.00200 METAL TIN-LEAD ON THE SOLDER TAIL, ALL OVER .000500 NICKEL	CUSTOMER DRAWING		SCALE	4:1	SHEET	1 OF 1	REV
POSTS: COPPER ALLOY								G