





REVISIONS					
P.	LTR.	DESCRIPTION	DATE	DWN.	APVD.
	B	REV PER ECO 17-015175	11OCT2017	CT	MOC

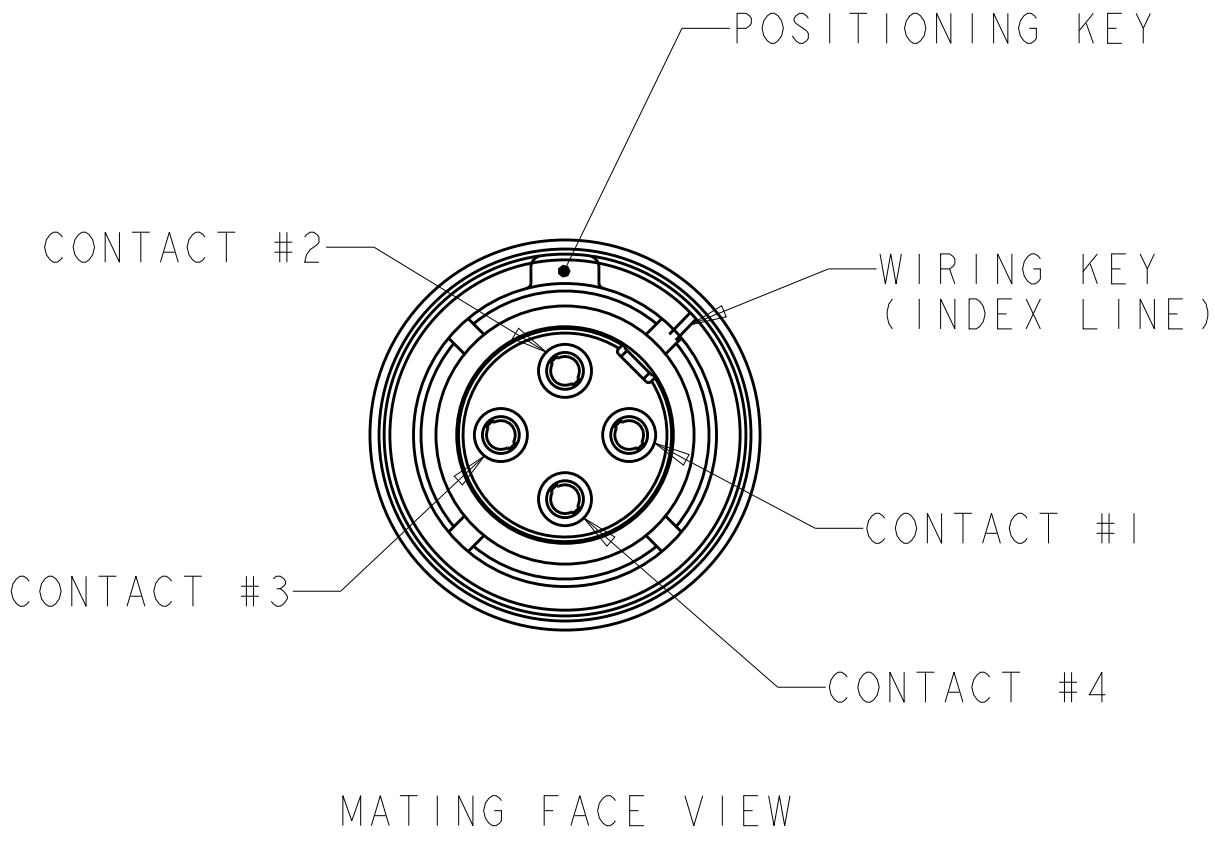

CONTACT CAVITY NUMBERING
STANDARD CAVITY NUMBER ASSIGNMENT

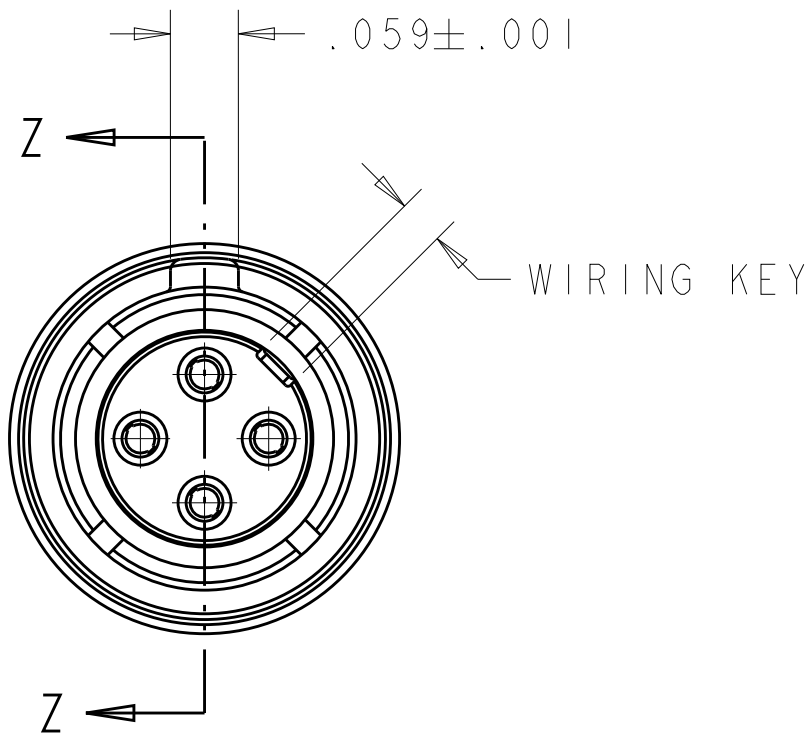

1. COMPONENTS ARE PACKAGED IN KIT FORM. CABLE MUST BE PURCHASED SEPARATELY.
2. ASSEMBLY PER APPLICATION SPECIFICATION 114-13123.
3. USE INSERTION-EXTRACTION TOOL 1738894-1.

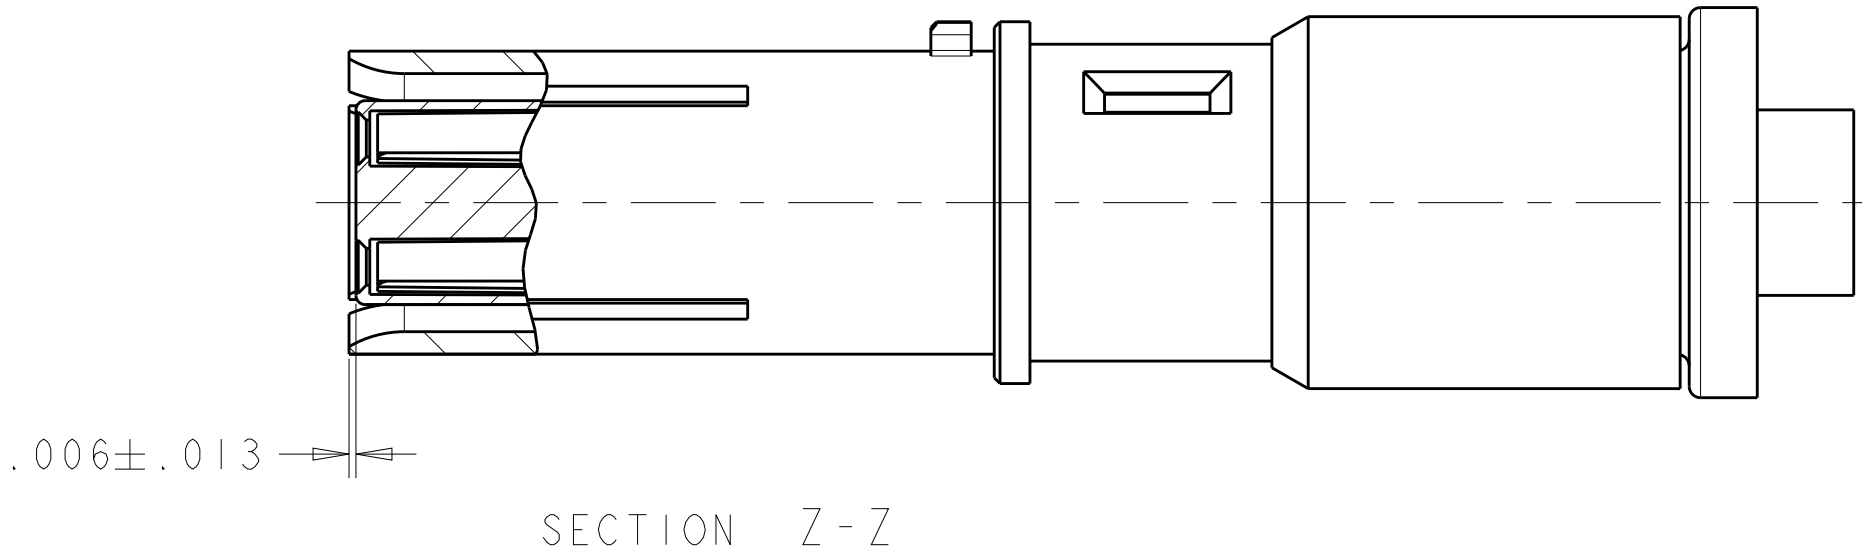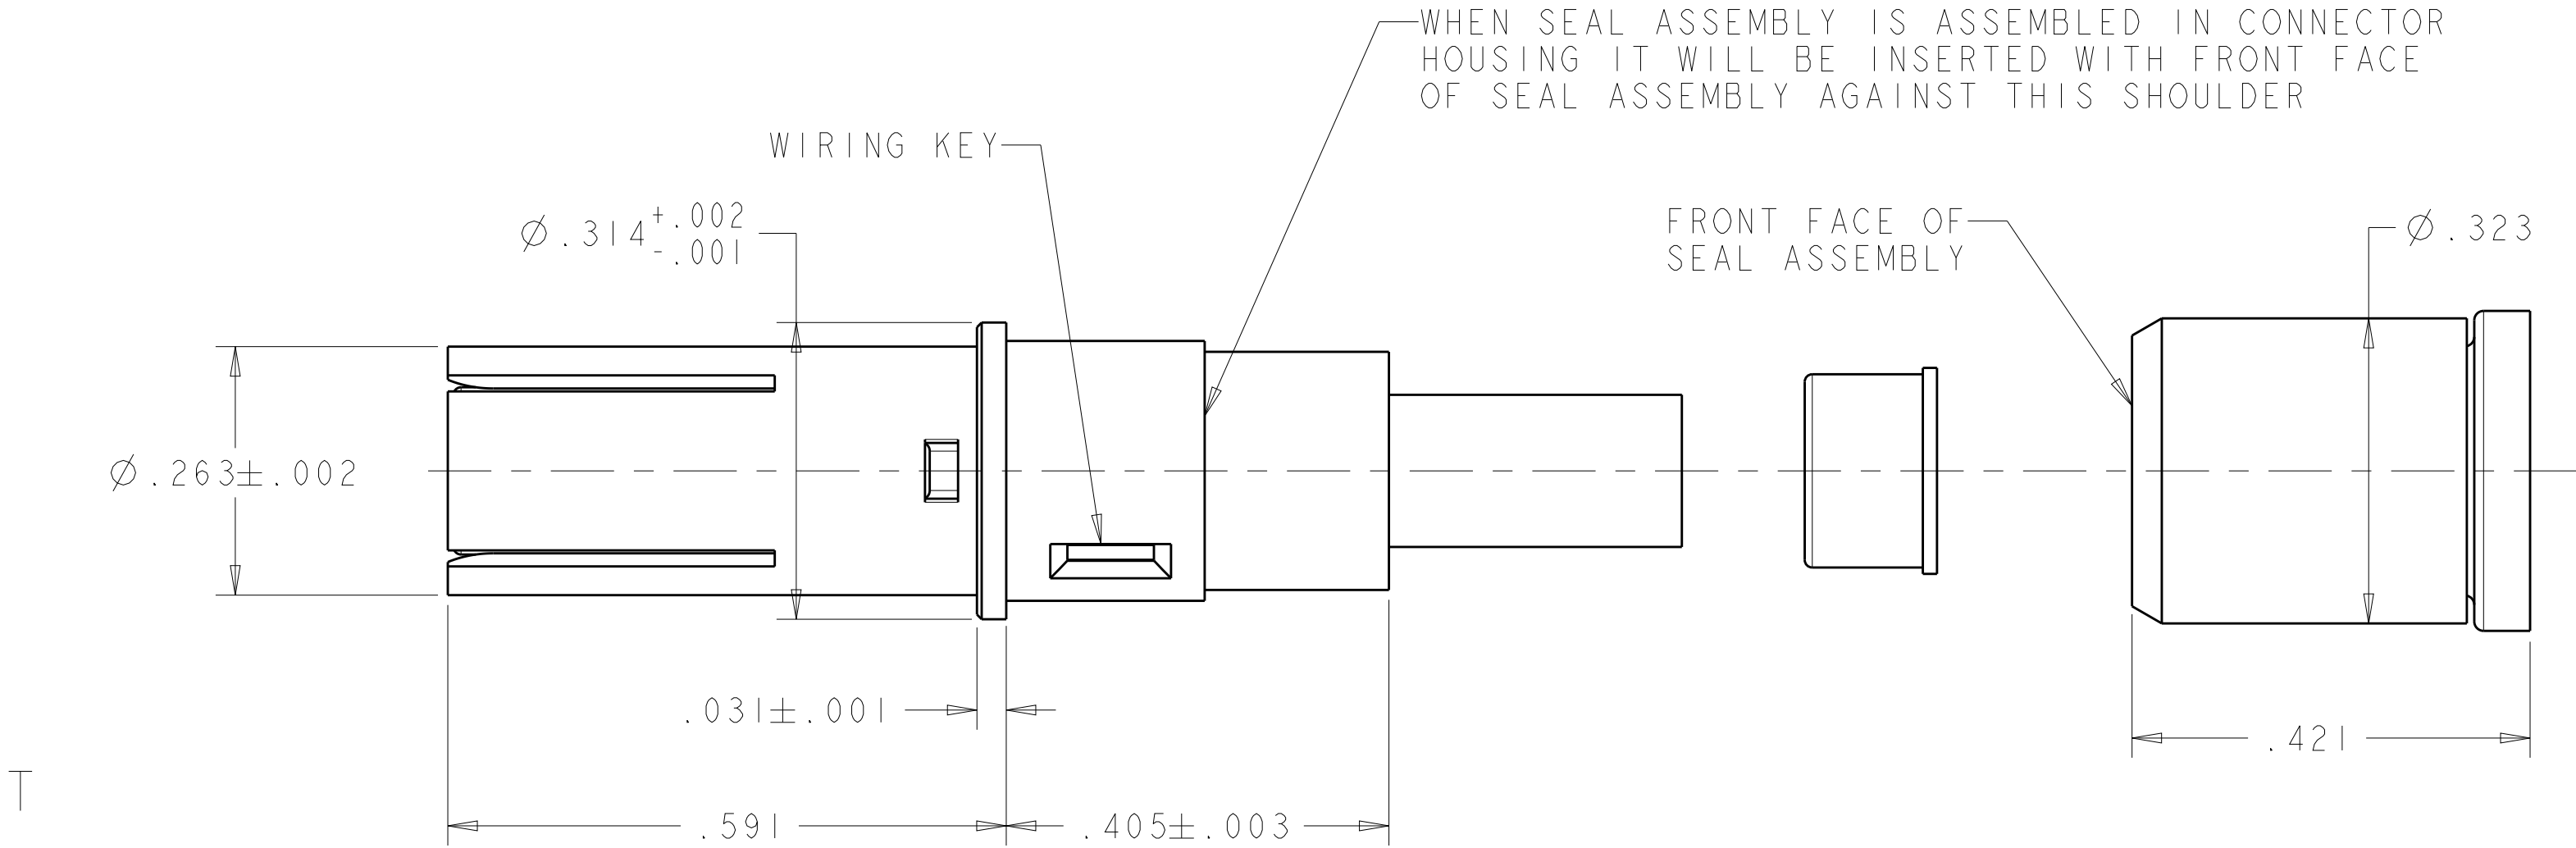

ASSEMBLY, SEAL; QTY-1
MATERIAL; SLEEVE, SEALING; THERMOPLASTIC, COLOR; NATURAL
SEAL BOOT; SILICONE RUBBER, COLOR; BLUE

FERRULE; QTY-1
MATERIAL; BRASS
FINISH; GOLD OVER NICKEL

CONTACT, SOCKET; QTY-4
MATERIAL; BERYLLIUM COPPER
FINISH; GOLD OVER NICKEL

CABLE, QUADRAX, NOT INCLUDED
SHOWN FOR REFERENCE ONLY

INSERT, SOCKET; QTY-1
MATERIAL; THERMOPLASTIC, COLOR-WHITE

SHELL, OUTER; QTY-1
MATERIAL; BERYLLIUM COPPER
FINISH; GOLD OVER NICKEL

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R FLAIG	26AUG2007	TE TE Connectivity	
DIMENSIONS: INCHES		CHK K DOWHOWER	26AUG2007		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K DOWHOWER	26AUG2007	NAME ASSEMBLY, SOCKET, QUADRAX,	
0 PLC ±.005		PRODUCT SPEC		SIZE CAGE CODE DRAWING NO	
1 PLC ±.005		APPLICATION SPEC		RESTRICTED TO	
2 PLC ±.005		WEIGHT		A100779C=2000032	
3 PLC ±.005		CUSTOMER DRAWING		SCALE 6:1 SHEET 1 OF 1 REV B	
4 PLC ±.005					
ANGLES					
FINISH					
MATERIAL					