



Features

- Weldable, Optional Process Fittings
- $\pm 0.25\%$ Pressure Non-linearity
- $\pm 0.75\%$ Temperature Performance
- Solid State Reliability
- Low Power

Applications

- Hydraulic Controls
- Process Control
- Robotics
- Oceanography
- Refrigeration/Compressors
- Pressure Transmitters

87N Compensated

Specifications

- 316L SS Pressure Sensor
- High Performance, Small Profile
- 0-100 mV Output
- Temperature Compensated
- Absolute and Sealed Gage

This is a micro machined piezoresistive silicon pressure sensor.

It is designed for OEM applications where compatibility with corrosive media must be maintained. The sensor chip is mounted in a 316L stainless steel package, sealing a small volume of silicon oil between the diaphragm and the sensor chip.

The ISO pressure housing utilizes the oil column to couple the piezoresistive sensor to the isolation diaphragm.

A thick-film ceramic compensation board with laser trimmed resistors, and additional gain set resistor to normalize pressure sensitivity are an integral part of the sensor package. A variety of threaded process fittings are available. Fittings include standards like 1/4 and 1/8 NPT as well as custom process fittings.

Electrical options include cable and connector.

Standard Ranges

Range	Psi A	Psi S
0 to 1000	•	•
0 to 3000	•	•
0 to 5000	•	•

Performance Specifications

Unless otherwise specified: Supply Current: 1.5mA, Ambient Temperature: 25°C

PARAMETERS	MIN	TYP	MAX	UNITS	NOTES
Span	75	150	210	mV	1
Zero Pressure Output	-1.0	0	+1.0	mV	
Pressure Non-Linearity	-0.25	-	+0.25	%Span	2
Pressure Hysteresis	-	±0.05	-	%Span	
Repeatability	-	±0.02	-	%Span	
Input Resistance	3.0	4.0	5.0	KΩ	
Output Resistance	4.0	-	25.0	KΩ	
Temperature Error – Span	-0.75	-	+0.75	%Span	3
Temperature Error – Offset	-0.75	-	+0.75	%Span	3
Thermal Hysteresis – Span	-0.25	±0.05		%Span	3
Thermal Hysteresis – Offset	-0.25	±0.05	+0.25	%Span	3
Long Term Stability – Span	-	±0.1	-	%Span/Year	
Long Term Stability – Offset	-	±0.1	-	%Span/Year	
Supply Current	0.5	1.5	2.0	mA	
Output Load Resistance	5	-	-	MΩ	4
Insulation Resistance (50VDC)	50	-	-	MΩ	5
Pressure Overload	-	-	3x	Rated	6
Pressure Burst	-	-	4x	Rated	7
Compensated Temperature	-20	-	+85	°C	
Operating Temperature	-40	-	+125	°C	8
Storage Temperature	-50	-	+125	°C	8

Media – Reference Port

LIQUIDS AND GASES COMPATIBLE WITH 316/316L ST STL


Notes:

- Measured at vacuum for absolute (A) and ambient for sealed gage (S).
for amplified output circuits, 3.012v ±1% interchangeability with gain set resistor.
- Best fit straight line
- Over temperature range -20°C to +85°C, with respect to +25°C.
- Load resistance to reduce measurement errors due to output loading.
- Between case and sensing element.
- Pressure overload 3x or 15,000 psi, whichever is less.
The maximum pressure that can be applied without changing the transducer's performance or accuracy.
- Pressure burst 4x or 15,000 psi, whichever is less.
The maximum pressure that can be applied to a transducer without rupture of either the sensing element or transducer.
- Maximum temperature range for product with standard cable and connector is -20°C to +105°C.
- Testing:
All 3000 and 5000 psi parts are tested at 2500 psi and calculated to full scale pressure respective.
- Marking:
Parts are marked with model number, pressure range, type ("A" for absolute or "S" for sealed gage),
Lot number, serial number and date code.
- Direct mechanical contact with diaphragm is prohibited. Diaphragm surface must remain free of defects (scratches, punctures, fingerprints, etc.) for device to operate properly. Caution is advised when handling parts with exposed diaphragms.
Use protective cap whenever devices are not in use.

Dimensions

(DIMENSIONS ARE IN INCHES [mm])

w/Back End Options

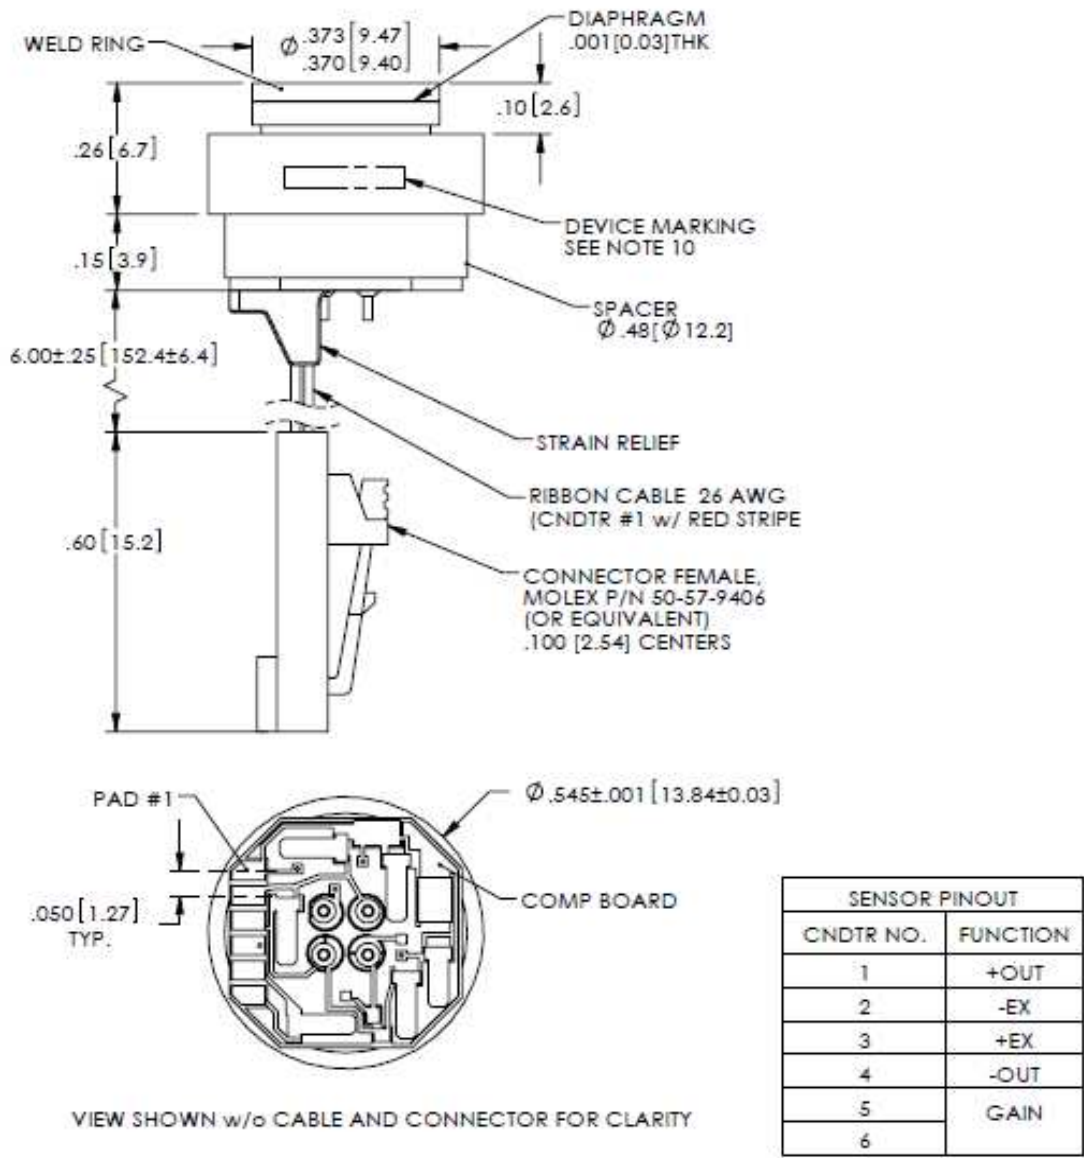

w/Process Fitting Options


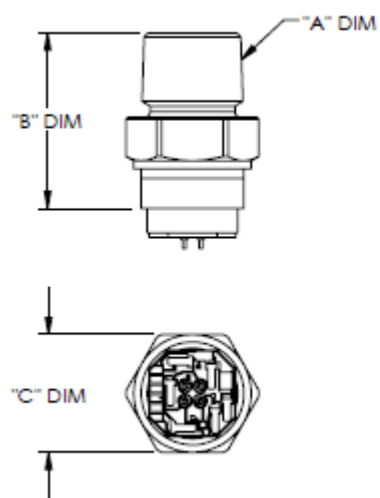


TABLE1:MODEL w/ FITTING DIMENSION				
FITTING TYPE	MEAS P/N	"A" DIM	"B" DIM	"C" DIM
1	041-7053	1/4-18 NPT	1.16[29.5]	7/8 [22.2] HEX
2	041-7052	1/8-27 NPT	1.15[29.0]	7/8 [22.2] HEX
3	041-7051	7/16-20 UNF-2A	1.00[25.4]	7/8 [22.2] HEX
4	041-6703	1/4-18 NPT	.93[23.6]	5/8 [15.9] HEX
5	041-5024	1/4-19 BSP	.98[24.9]	3/4 [19.0] HEX
8	041-6789	1/8-27 NPT	.80[20.3]	5/8 [15.9] HEX
9	041-7125	1/4-19 BSP	1.12[28.4]	7/8 [22.2] HEX
NOTE : FITTING TYPE "4" ASSEMBLY SHOWN ALL DIMS ARE FOR REFERENCE ONLY				

Equivalent Schematic

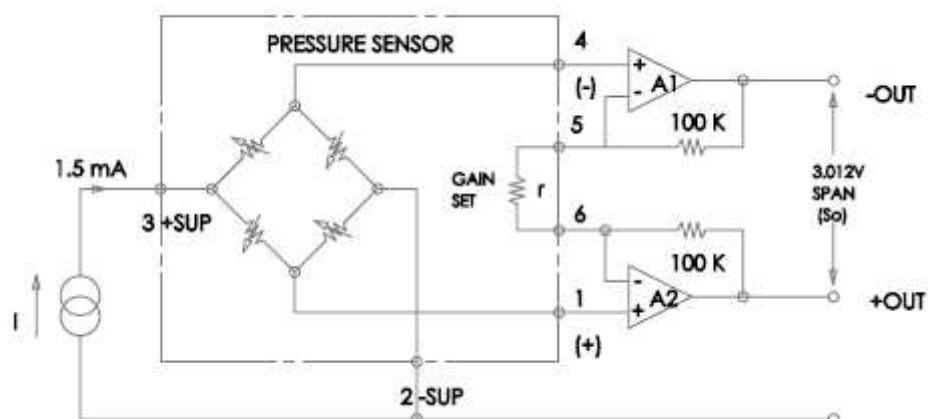

Ordering Information

87N - XXXX X - X X

Pressure Range (PSI)
1000
3000
5000

Type
A = Absolute
S = Sealed Gage

Electrical
P = Solder Pads
R = Cable
C = Cable w/Connector

Fitting Type
0 = No Fitting
1 = 1/4 NPT, 7/8 HEX
2 = 1/8 NPT, 7/8 HEX
3 = 7/16 UNF, 7/8 HEX
4 = 1/4 NPT, 5/8 HEX
5 = 1/4 BSP, 3/4 HEX
8 = 1/8 NPT, 5/8 HEX
9 = 1/4 BSP, 7/8 HEX

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
Tel: 800-522-6752
Email: customercare.frmt@te.com

EUROPE

Measurement Specialties (Europe), Ltd.,
a TE Connectivity Company
Tel: 800-440-5100
Email: customercare.lcsb@te.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
Tel: 0400-820-6015
Email: customercare.shzn@te.com

te.com

TE Connectivity, TE, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2019 TE Connectivity Corporation. All Rights Reserved.

Version # 08/2020

