

**TERABEE** 

TeraRanger Evo People Counter


The ability to measure pedestrian or customer flow with a bidirectional people traffic counter has applications across many sectors including retail, hospitality and events, to name a few. Evo People Counter achieves this in one compact and easy to integrate ToF sensor.

Small and discreet, the sensor offers vertical and horizontal mounting options. With a 0.05m to 1.7m detection range, the sensor is ideal for measuring people flow in corridors and allows integration in door frames, furniture and Point of Sale assets.


Registering the number of people who have passed by and also their direction of travel extends applications beyond people counting, facilitating an understanding of the way people flow within and around a space.

Key features

- Bi-directional people traffic counting
- Embedded algorithm, no need for extra processing power
- Small, discreet sensor (not a camera)
- Anonymous and GDPR compliant by design
- Easy integration. Ideal for OEM design-in projects
- Low power consumption

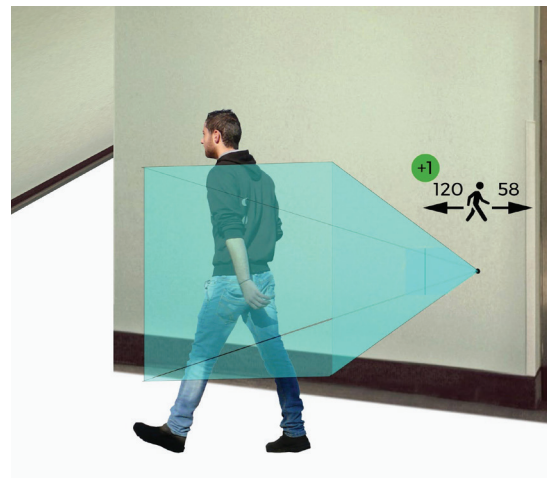

Applications



Monitor pedestrian access and flow



Retail Point of Sale analytics



Staff deployment planning

Technical specifications

Product Code	TR-EVO-PPC-USB TR-EVO-PPC-UART
--------------	-----------------------------------

Performance

Detection Principle	Infrared Time-of-Flight
Light Source Wavelength	940 nm
Use Environment	Indoor
Field of View	27°

Electronics

Supply Voltage	5V DC +/-5%
Current Consumption Average	50 mA
Initialization Time	< 1 s

Communication

Serial Interface	USB 2.0 Micro-B UART, +3.3V level, 115200,8,1, None
Visual Notification	3 x LEDs (built-in backboards)

Mechanical data

Dimensions	42 x 30 x 13 mm (incl. backboard)
Weight	9 g (incl. backboard)
Operating Temperature	-20° C to 75° C
Housing Material	ABS
Mounting Style	2 holes for M2 screws
Type of Connection	USB Backboard: USB 2.0 Micro-B I2C/UART Backboard: DF13-7p connector


Operation

Mode	Bidirectional People Counting
Output	Count of the number of people passing by the sensor via three metrics: People Inside (People inside = People In - People Out), People In and People Out
Range - Horizontal Mounting	~ 0.05 m to 1.5 m
Range - Vertical Mounting	~ 2.0 m to 2.5 m
Update Rate	25 Hz

Conformity

Reference Standard	CE, RoHS
--------------------	----------

Dimensions

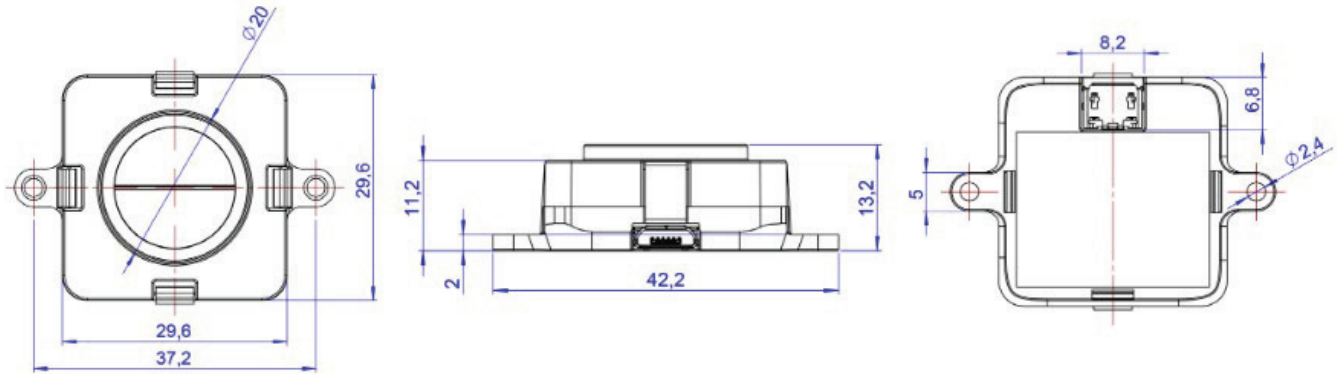

Installation

Back panel



Front panel



Have any questions? Contact us today!