


225 kVA

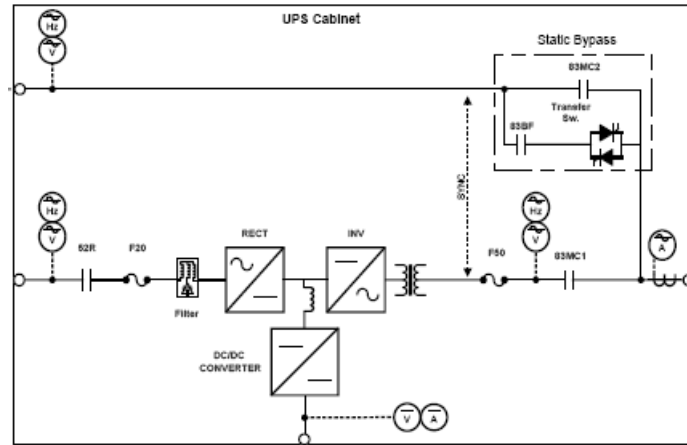

Features at-a-glance

- | | | |
|--|--|--|
| <ul style="list-style-type: none"> Single/Parallel in one box for modular design Parallel Circuits in each UPS for reliability True Online, Double-Conversion Technology Dual Input Design (Alternate Input for bypass) Static Bypass Switch <ul style="list-style-type: none"> Thyristor + Contactor for highest reliability | <ul style="list-style-type: none"> LCD Touch screen Graphic Display IGBT Inverter – Space Vector Modulation Output Isolation Transformer All Digital Signal Processor (DSP) software logic using 12 bit processor Front Access for Installation and Maintenance. Bottom or Side Access for Power Cables. | <ul style="list-style-type: none"> Battery Temperature Compensation Generator Compatible 1.1:1 Monitoring Options <ul style="list-style-type: none"> RemotEye II (SNMP/Web) Memory Card w/software Dry Contacts |
|--|--|--|

Input Specifications

Voltage range: 480V +15% -15%
 (Optional Cabinet for 208V, 600V)
 Frequency range: 60Hz, +/- 5%
 Power factor: >0.98
 Input current THD: less than 6% at 100% load
 Surge protection: Meets ANSI C62.41

Battery Specifications

Cabinets or Racks with DC Breaker
 Battery type: Sealed Valve Regulated Lead-Acid
 Recharge time: 10 x discharge time to 90% capacity
 DC Link: 480VDC Nominal

Environmental Specifications

Ambient temperature: 0C to +40C
 Relative humidity: 5%-95% Non-Condensing
 Altitude: 0 to 9000 feet without derating
 Audible noise: Less than 76 dBA at 1 meter

Output Specifications: 225 kVA/180 kW (0.8PF)

Voltage: 480Y/277V Standard
 (Optional 600/347V)
 Voltage regulation: +/- 1%
 Freq. regulation: +/- 0.05% (Free running)
 Dynamic response: +/-2% at 100% step load
 (recovery in less than 1 cycle)
 Voltage Distortion:
 Less than 2% for 100% linear load
 Less than 5% for 100% non-linear load
 Freq. sync range: +/- 5% (user selectable)
 Freq. slew rate: 1 – 10 Hz/second (user selectable)
 Voltage adjustment: +/-5% (user selectable)
 Overload capacity: 1000% for 1 cycle
 150% for 1 minute
 125% for 10 minutes
 Crest Factor: 2.3 : 1

Safety

UL/CUL 1778 Listed
 All cabinets provide for seismic zone 4 mounting

Options

Input/Output Transformer Cabinet
 Maintenance Bypass Cabinet
 RemotEye II™ Network Adapter
 “Security Plus” Maintenance Agreement

G8000MM 225 kVA UPS Specifications


Item: T8MS3K22KK6XSN		225
		225kVA/180kW
Input Voltage	Volts	480
Output Voltage	Volts	480/277
Input Voltage Range		+15% to -15%
Minimum	Volts	408
Maximum	Volts	552
Frequency	Hz	60
AC Input Current		(> 0.98 PF)
Nominal Amps	Amps	237
Maximum Amps ⁽¹⁾	Amps	254
Bypass Input	Volts	480/277
Nominal Amps	Amps	271
AC Output Current		(at 0.8 PF)
Nominal Amps	Amps	271
10 Minutes Max.	Amps	338

Item: T8MS3K22KK6XSN		225
		225kVA/180kW
DC Link		
Nominal DC Voltage	Volts	480
Float Voltage	Volts	545
End of Discharge	Volts	400
Charger	Amps	29.3 (Max)
Efficiency		
Efficiency	%	93.3

Full Load Heat Dissipation		
BTU/Hr.		44,105
kW		12.9

(1) Maximum Amps equals full load current plus battery recharge current.

G8000MM 225 kVA UPS Specifications

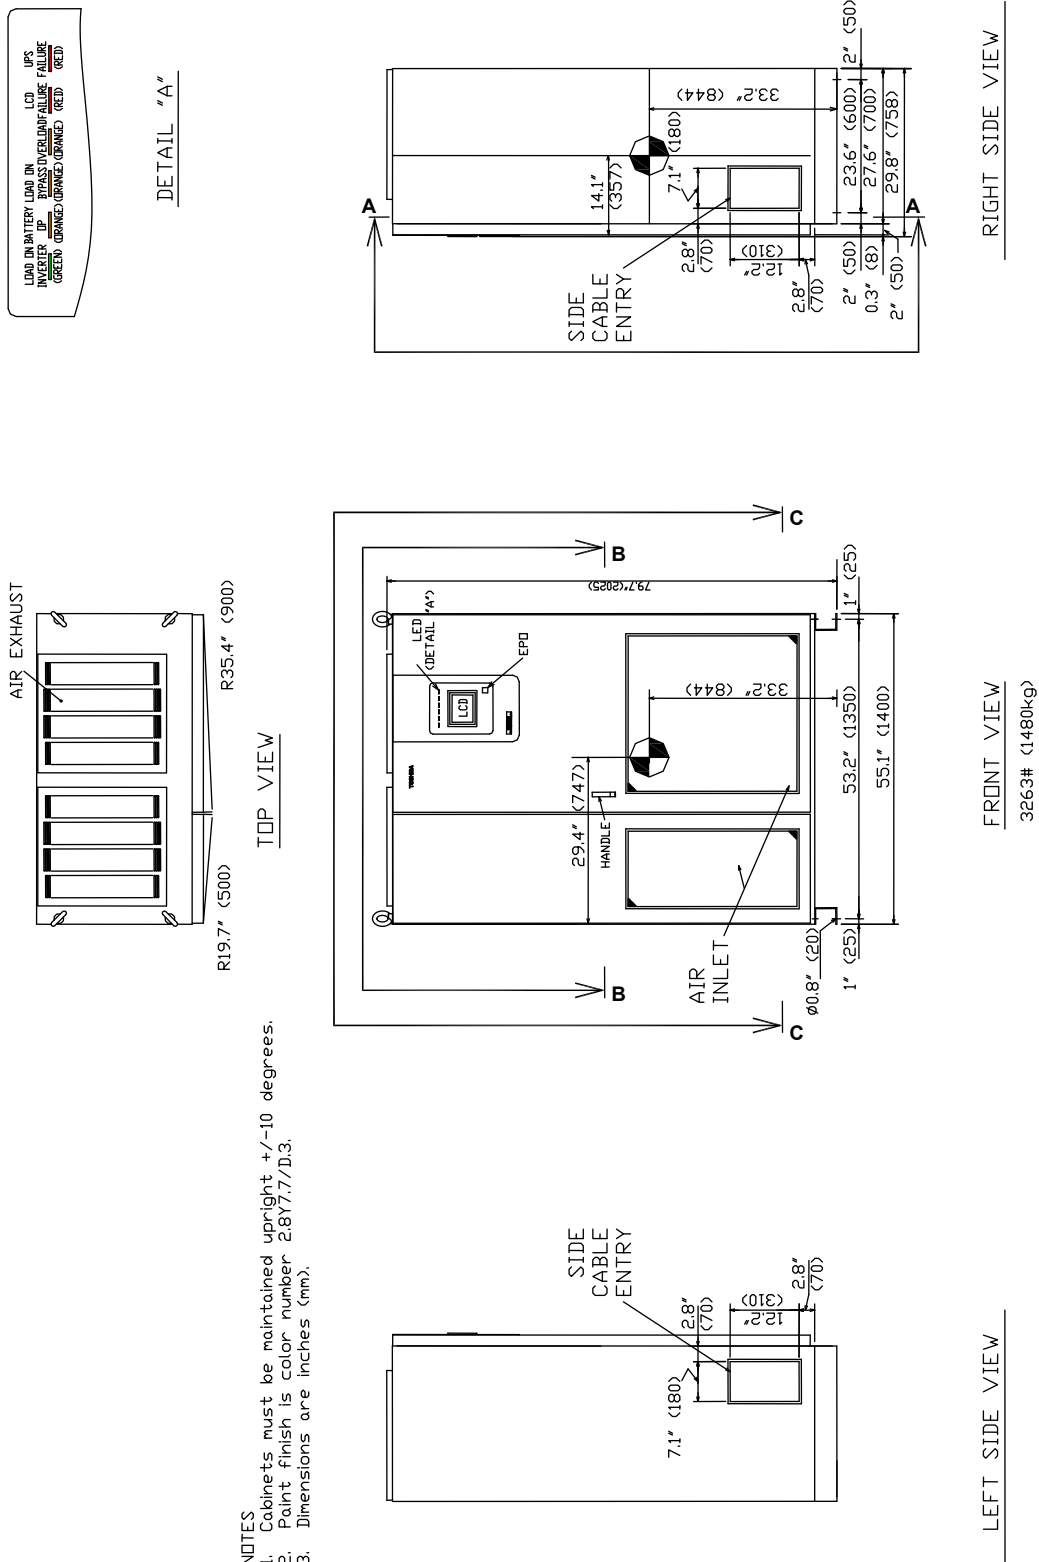

G8000MM 225 kVA UPS Specifications

