


DC-DC Converters



www.powersolve.co.uk

TEN 10 Series 10 Watt

- 51x25x10mm Metal Package
- Wide 2:1 Input Range
- High Efficiency up to 83%
- Operating Temperature Range -40°C to $+85^{\circ}\text{C}$
- I/O Isolation 1500 VDC
- Short Circuit Protection
- Input Filter to meet EN 55022, Class A
- Industry Standard Pinout

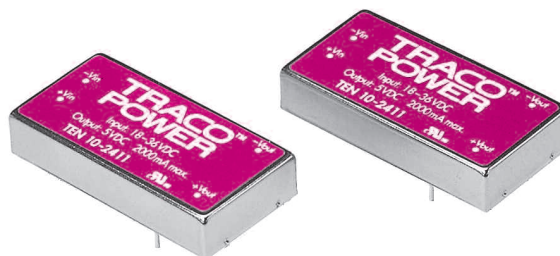

Line regulation:	$\pm 0.2\%$ max.
Load regulation:	– Single output models: $\pm 0.5\%$ max. – Dual output models: $\pm 1.0\%$ max.
Ripple & Noise:	< 50 mV pk-pk (20 MHz BW)
Conducted EMI:	EN 55022, class A and FCC, level A (internal filter)
Short circuit protection:	continuous, automatic recovery
Efficiency:	81% typ. 3.3VDC models: 75% typ.
Operating temperature range:	-40°C ... $+85^{\circ}\text{C}$ above 70°C derating 4%/ $^{\circ}\text{C}$
I/O isolation voltage:	1500 VDC
Safety standards / approvals:	cUL /UL 60950, IEC/EN 60950
Case:	metal, 6-side shielded with insulated baseplate

Models			
Order Code	Input voltage	Output voltage	Output current max.
TEN 10-1210	9 - 18 VDC	3.3 VDC	2400 mA
TEN 10-1211		5 VDC	2000 mA
TEN 10-1212		12 VDC	830 mA
TEN 10-1213		15 VDC	670 mA
TEN 10-1215		24 VDC	415 mA
TEN 10-1221		± 5 VDC	± 1000 mA
TEN 10-1222		± 12 VDC	± 415 mA
TEN 10-1223		± 15 VDC	± 330 mA
TEN 10-2410	18 - 36 VDC	3.3 VDC	2400 mA
TEN 10-2411		5 VDC	2000 mA
TEN 10-2412		12 VDC	830 mA
TEN 10-2413		15 VDC	670 mA
TEN 10-2415		24 VDC	415 mA
TEN 10-2421		± 5 VDC	± 1000 mA
TEN 10-2422		± 12 VDC	± 415 mA
TEN 10-2423		± 15 VDC	± 330 mA
TEN 10-4810	36 - 75 VDC	3.3 VDC	2400 mA
TEN 10-4811		5 VDC	2000 mA
TEN 10-4812		12 VDC	830 mA
TEN 10-4813		15 VDC	670 mA
TEN 10-4815		24 VDC	415 mA
TEN 10-4821		± 5 VDC	± 1000 mA
TEN 10-4822		± 12 VDC	± 415 mA
TEN 10-4823		± 15 VDC	± 330 mA

Pin-Out		
Pin	Single Output	Dual Output
1	+ Vin (Vcc)	+ Vin (Vcc)
2	– Vin (GND)	– Vin (GND)
3	+ Vout	+ Vout
4	No pin	Common
5	– Vout	– Vout

