

DC-DC Converters

**POWER
SOLVE**

THD15WIN Series, 15 Watt

www.powersolve.co.uk

Features

- High power density in a DIP-24 metal package
- Ultra wide 4:1 input range
- High efficiency up to 90%
- I/O isolation 1500VDC
- Operating temperature range -40°C to +85°C
- Input filter to meet EN55022 class A
- Industry standard pin out
- Short circuit protection, Under voltage lockout & Remote ON/OFF




Electrical Specification

Conducted EMI	EN55022 class A & FCC level A (internal filter)
Short Circuit Protection	continuous, automatic recovery
Operating Temperature Range	-40°C to +85°C (derate at 4.0%/°C above 70°C)
I/O Isolation test voltage	1500VDC
Safety Approvals	cUL/UL 60950-1, IEC/EN 60950-1
Casing	metal, 6-side shielded with insulated baseplate
Remote ON/OFF	Shutdown input for low current (2.5mA) in standby operation

Output Voltage and Current Ratings

MODEL	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	RIPPLE & NOISE	LINE REG.	LOAD REG.	EFF.
THD15-2410WIN	9 - 36VDC	3.3VDC	4000mA	60mV pk-pk max.	0.2%	0.5%	88%
THD15-2411WIN		5.1VDC	3000mA	60mV pk-pk max.	0.2%	0.5%	88%
THD15-2412WIN		12VDC	1250mA	60mV pk-pk max.	0.2%	0.5%	88%
THD15-2413WIN		15VDC	1000mA	60mV pk-pk max.	0.2%	0.5%	88%
THD15-2421WIN		±5VDC	±1500mA	60mV pk-pk max.	0.2%	1.0%	88%
THD15-2422WIN		±12VDC	±625mA	60mV pk-pk max.	0.2%	1.0%	88%
THD15-2423WIN	18 - 75VDC	±15VDC	±500mA	60mV pk-pk max.	0.2%	1.0%	88%
THD15-4810WIN		3.3VDC	4000mA	60mV pk-pk max.	0.2%	0.5%	88%
THD15-4811WIN		5.1VDC	3000mA	60mV pk-pk max.	0.2%	0.5%	88%
THD15-4812WIN		12VDC	1250mA	60mV pk-pk max.	0.2%	0.5%	88%
THD15-4813WIN		15VDC	1000mA	60mV pk-pk max.	0.2%	0.5%	88%
THD15-4821WIN		±5VDC	±1500mA	60mV pk-pk max.	0.2%	1.0%	88%
THD15-4822WIN		±12VDC	±625mA	60mV pk-pk max.	0.2%	1.0%	88%
THD15-4823WIN		±15VDC	±500mA	60mV pk-pk max.	0.2%	1.0%	88%

Mechanical and Connection Details

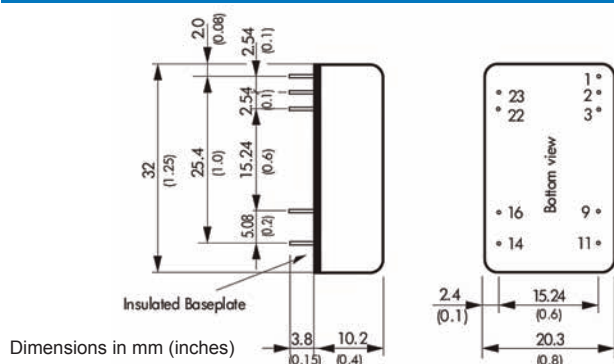

Pin	Single Output	Dual Output
1	Remote ON/OFF	Remote ON/OFF
2	-Vin (GND)	-Vin (GND)
3	-Vin (GND)	-Vin (GND)
9	No Conn.	Common
11	No Conn.	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin (Vcc)	+Vin (Vcc)
23	+Vin (Vcc)	+Vin (Vcc)