




ECO-Surge 7-Outlet Surge Protector, 6 ft. (1.83 m) Cord, 1080 Joules, 6 Individually Controlled Outlets, Black Housing

MODEL NUMBER: TLP76MSGB

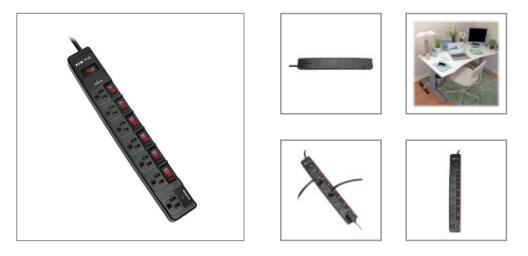

Environmentally friendly surge protector with individually controlled outlets safeguards your PC, printer, scanner, router, phone, fax, modem and other home/office electronics against dangerous surges, spikes and line noise.

Description

The TLP76MSGB ECO-Surge[™] 7-Outlet Surge Protector protects more than just your vital electronics. It's an ideal green protection solution for your bottom line and the environment. Its energy-saving outlet configuration reduces waste (and costs) by cutting AC power to devices that aren't being used. One NEMA 5-15R outlet is always on for a device that requires constant power, such as a router or DVR. The other six NEMA 5-15R outlets have individual on/off switches, so if you aren't using the device plugged into it, you can power off the outlet to save energy. Another illuminated on/off switch provides one-touch control to all outlets except the one that is always on.

Recommended for your home or office, the ECO-Surge Protector features 1080 joules to defend your components against even the strongest surges and spikes. Because residential power outlets have three wires—hot line (H), neutral (N) and ground (G)—the TLP76MSGB protects all three, covering the two protection modes: full normal mode (H-N) and common mode (N-G/H-G). It also filters out electromagnetic interference (EMI) and radio frequency interference (RFI) that can disrupt your electronics and inflict hardware damage or data loss.

An integrated circuit breaker protects all outlets and automatically shuts down connected equipment in case of overload. The 6-ft. (1.83 m) AC power cord with NEMA 5-15P plug allows the black surge protector to reach distant outlets.

Features

ECO-Surge Protector with Green Power-Saving Outlets6 NEMA 5-15R outlets have individual on/off switches to cut power to devices not being used, which saves energy and moneyOne NEMA 5-15R outlet stays powered on 24/7 for essential devices, such as a router or DVRMaster on/off switch provides one-touch control over all outlets except the "always on" outletAccommodates up to 4 bulky transformer plugs

1080-Joule Surge Protection for Home or Office ElectronicsProtects your computer, printer, scanner, router, modem and other electronics against even the strongest surges and spikesFull normal mode (H-N) and common mode (N-G/H-G) line surge suppressionFilters out disruptive EMI/RFI line noise that can cause equipment damage or data lossExceeds IEEE 587 Category A and B surge suppression specifications

Premium Safety FeaturesAutomatic shutoff permanently cuts power to outlets if protection circuit is incapacitated, preventing equipment damage and indicating replacement is requiredDiagnostic LEDs confirm surge protection status and "always on" connection at a glanceConforms to current UL 1449 3rd

Highlights

- 7 NEMA 5-15R outlets—6 with individual on/off switches
- 1080-joule surge protection rating
- Filters out threatening EMI/RFI line noise
- Automatic shutoff protects against dangerous overloads
- 6-ft. (1.83 m) AC power cord with NEMA 5-15P plug

Package Includes

- TLP76MSGB ECO-Surge 7-Outlet Surge Protector
- Owner's manual



Edition safety standards

Fits Effortlessly Into Your Workstation6-ft. (1.83 m) AC power cord with NEMA 5-15P plug conveniently reaches distant outletsKeyhole slots on bottom panel provide convenient wall or desk mounting optionsBlack plastic housing designed for long life

Backed by Ultimate Lifetime Insurance\$25,000 Ultimate Lifetime Insurance covers any connected components damaged by power surge (U.S., Canada and Puerto Rico only)

Specifications

OVERVIEW		
UPC Code	037332205810	
INPUT		
Nominal Input Voltage(s) Supported	120V AC	
Recommended Electrical Service	120V (110-125V)	
Input Cord Gauge Type	14 gauge; SJT	
Input Cord Gauge (AWG)	14	
Voltage Compatibility (VAC)	120	
Maximum Surge Amps	72000	
Input Plug Type	NEMA 5-15P	
Input Cord Details	TLS	
Input Cord Length (ft.)	6	
Right-Angle Plug	No	
Input Cord Length (m)	1.83	
Integrated Cord Clip	No	
OUTPUT		
Output Capacity (VA)	120	
Output Capacity (Watts)	1800	
Frequency Compatibility	60 Hz	
Output (Watts)	1800	
Output Receptacles	(7) 5-15R	
Transformer Accommodation	(4) Yes	
Right-Angle Outlets	Yes	
Individually Controllable Load Banks	Yes	
USER INTERFACE, ALERTS & CONTROLS		
Diagnostic LED(s)	Yes	





Switches	1 x Lighted Master Switch & 6 x Lighted Receptacle Switches	
LED Indicators	Protected (Green)" & Always On Receptacle (Red)	
SURGE / NOISE SUPPRESSION AC Suppression Joule Rating	1080	
AC Suppression Response Time	< 1 ns	
Protection Modes	Includes full normal mode (H-N) and common mode (N-G / H-G) line suppression	
UL1449 Let Through Rating	400v	
EMI / RFI Filtering	Up to 40 dB	
Automatic Shut-Off	Yes	
DATALINE SURGE SUPPRESSION		
Cable (Coax) Protection	No	
Network (Ethernet) Protection	No	
Telephone/DSL Protection	No	
PHYSICAL		
Material of Construction	Plastic	
Power Cord Color	Black	
Housing Color	Black	
Mounting Holes or Slots	No	
Slot or Hole Mount Measurement (Center to Center)	300 mm	
Receptacle Color	Black	
Shipping Dimensions (hwd / in.)	2.00 x 4.20 x 17.00	
Shipping Dimensions (hwd / cm)	5.08 x 10.67 x 43.18	
Shipping Weight (lbs.)	1.80	
Shipping Weight (kg)	0.82	
Unit Dimensions (hwd / in.)	1.400 x 3.400 x 15.000	
Unit Dimensions (hwd / cm)	3.56 x 8.64 x 38.1	
Unit Weight (lbs.)	1.54	
Unit Weight (kg)	0.70	
Input Cord Color	Black	
FEATURES & SPECIFICATIONS		
Rotatable Outlets	No	
Antimicrobial	No	





STANDARDS & COMPLIANCE		
Product Certifications	CAN/CSA-C22.2 No. 269.3 (Canada); CAN/CSA-C22.2 No. 308 (Canada); cUL Listed; NOM (Mexico); UL 1449; UL 1363; UL Listed	
Product Compliance	RoHS	
WARRANTY & SUPPORT		
Product Warranty Period (Worldwide)	Lifetime limited warranty	
Connected Equipment Insurance (U.S., Canada & Puerto Rico)	\$25,000 Ultimate Lifetime Insurance	

1000 Eaton Boulevard Cleveland, OH 44122 United States https://tripplite.eaton.com © 2025 Eaton. All Rights Reserved. Eaton is a registered trademark. All other trademarks are the property of their respective owners.