

# Photologic® Sensor

OPL530, OPL531, OPL535, OPL536, OPL550,  
OPL551, OPL560, OPL561, OPL562, OPL563



## Features:

- Choice of four output options in low-cost side-looking package
- Choice of two sensitivity options (OPL560/561/562/563)
- High noise immunity
- Direct TTL/LSTTL CMOS interface
- Data rates to 250 kBaud for all except OPL560 series (200 kBaud)
- Low power consumption

## Description:

All components in this series include a photodiode, amplifier, voltage regulator, Schmitt trigger and NPN output transistor on a single silicon chip. **OPL560** chips also include a voltage regulator on the chip. All devices in the series have a Photologic® chip that is encapsulated in a molded plastic side-looking package with an integral lens (recessed integral lens for OPL535 and OPL536). This packaging provides enhanced optical coupling, combined with mechanical protection. The hysteresis characteristics of the Schmitt trigger on each device offers high immunity to noise on input and  $V_{CC}$ .

**OPL530, OPL531, OPL535** and **OPL536** include a 10 K  $\Omega$  pull-up resistor ( $R_L$ ) from output to  $V_{CC}$ . These components exhibit very stable performance over supply voltages ranging from 4.5 V to 16 V and a wide range of irradiance levels. **OPL550** and **OPL551** devices feature TTL/LSTTL compatible logic level output which can drive up to 8 TTL loads without additional circuitry and medium-speed data rates to 250 kBaud, with typical rise and fall times of 25 nanoseconds. **OPL560, OPL561, OPL562** and **OPL563** devices feature TTL/LSTTL compatible logic level output which can drive up to 10 TTL loads over supply voltages ranging from 4.5 V to 16 V.

**OPL530, OPL531, OPL550, OPL551, OPL560, OPL561, OPL562** and **OPL563** are mechanically and spectrally matched to OP140 and OP240 LEDs. **OPL535** and **OPL536** are mechanically and spectrally matched to OP145 and OP245 series LEDs.

## Applications:

- Non-contact reflective object sensor
- Assembly line automation
- Machine automation
- Machine safety
- End of travel sensor
- Door sensor


| Base Part Number                          | Package       | Output Type - with Light | Input Power Range<br>(mW/cm <sup>2</sup> ) [Min/Max] |                |              |                |    |
|-------------------------------------------|---------------|--------------------------|------------------------------------------------------|----------------|--------------|----------------|----|
|                                           |               |                          | -                                                    | A              | B            |                |    |
| OPL530                                    | External Lens | Internal 10 K - High     | 0.12/<br>0.38                                        | --             | --           |                |    |
| OPL530-OC                                 |               | Open Collector - High    |                                                      |                |              |                |    |
| OPL531A                                   |               | Internal 10 K - Low      | --                                                   |                |              | 0.12/<br>0.280 | -- |
| OPL531-OCA                                |               | Open Collector - Low     |                                                      |                |              |                |    |
| OPL535A, OPL535B                          | Recessed Lens | Internal 10 K - High     | --                                                   | 0.23/<br>0.38  |              |                |    |
| OPL536A, Obsolete - OPL536-OC, OPL536-OCA |               | Internal 10 K - Low      |                                                      |                |              |                |    |
| OPL550, OPL550A<br>Obsolete - OPL550-OC   | External Lens | Totem Pole - High        | 0.25/<br>2.4                                         |                | 0.25/<br>1.4 | N/A            |    |
| OPL550-OCA                                |               | Open Collector - High    |                                                      |                |              |                |    |
| OPL551, Obsolete - OPL551A                |               | Totem Pole - Low         |                                                      |                |              |                |    |
| OPL551-OC, OPL551-OCA                     |               | Open Collector - Low     |                                                      |                |              |                |    |
| OPL560, OPL560A                           |               | Totem Pole - High        | 0.09/<br>0.55                                        | 0.09/<br>0.36  | N/A          |                |    |
| OPL560-OCA                                |               | Open Collector - High    |                                                      |                |              |                |    |
| OPL561                                    |               | Totem Pole - Low         |                                                      |                |              |                |    |
| OPL561-OC, OPL561-OCA                     |               | Open Collector - Low     | 0.025<br>/0.23                                       | 0.025<br>/0.14 | N/A          |                |    |
| OPL562,<br>Obsolete - OPL562A             |               | Totem Pole - High        |                                                      |                |              |                |    |
| OPL562-OC, OPL562-OCA                     |               | Open Collector - High    |                                                      |                |              |                |    |
| OPL563, Obsolete - OPL563-OC, OPL563-OCA  |               | Totem Pole - Low         |                                                      |                |              |                |    |
| OC = Open Collector Output                |               |                          |                                                      |                |              |                |    |
| OCA = Open Collector Output Inverted      |               |                          |                                                      |                |              |                |    |




## General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


### OPL530, OPL550, OPL560 Series

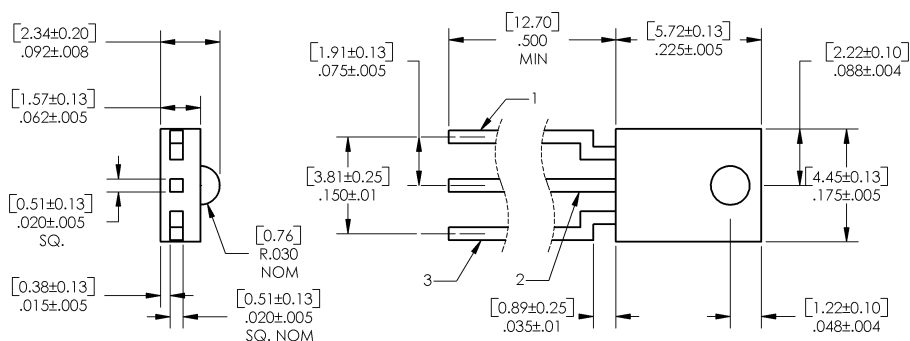


OPL550/550A/560/560A/562 Totem-Pole

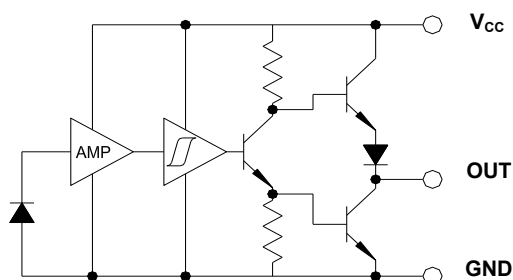


OPL530-OC/550-OCA/560-OCA/562-OC/562-OCA Open-Collector

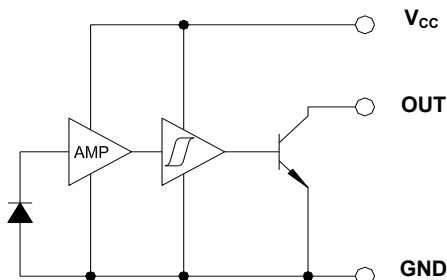

OPL551/561/563 Inverted Totem-Pole

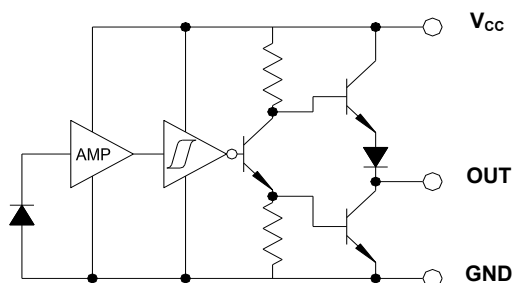


OPL531-OCA/551-OC/551-OCA/561-OC/561-OCA Inverted Open-Collector

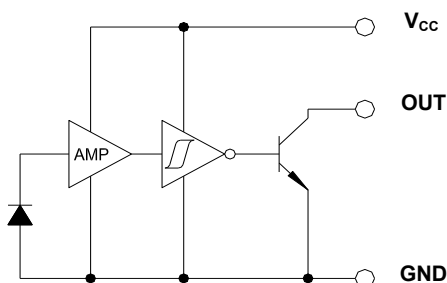


OPL530, OPL531A, OPL535A, OPL535B, OPL536A

OPL530/535A/535B 10 K Pull-Up

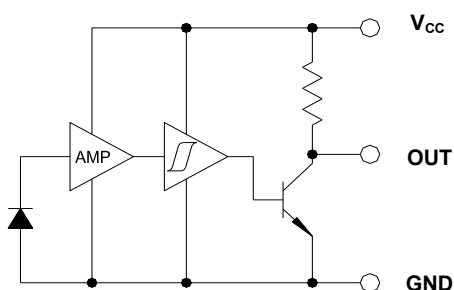

OPL531A/536A Inverted 10 K Pull-Up

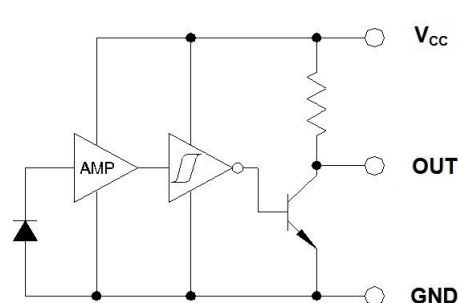

### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

### Electrical Specifications

**Absolute Maximum Ratings** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

| Input Diode                                                                                                                       |                                                                       |
|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
| Supply Voltage ( $V_{CC}$ )<br>OPL530, OPL530-OC<br>OPL550<br>OPL560, OPL561, OPL562, OPL563                                      | 18 V<br>10 V<br>18 V                                                  |
| Operating Temperature Range                                                                                                       | $-40^\circ\text{C}$ to $+85^\circ\text{C}$                            |
| Storage Temperature Range                                                                                                         | $-40^\circ\text{C}$ to $+100^\circ\text{C}$                           |
| Lead Soldering Temperature [1/16 inch (1.6 mm) from the case for 5 sec. with soldering iron]                                      | $260^\circ\text{C}$                                                   |
| Sourcing Current<br>OPL560, OPL561, OPL562, OPL563                                                                                | 10 mA                                                                 |
| Power Dissipation<br>OPL530, OPL530-OC<br>OPL550, OPL560, OPL561, OPL562, OPL563                                                  | 90 mW<br>200 mW <sup>(2)</sup>                                        |
| Sinking Current<br>OPL530, OPL530-OC<br>OPL550<br>OPL560, OPL561, OPL562, OPL563                                                  | 50 mA<br>-<br>50 mA                                                   |
| Voltage at Output Lead <sup>(4)</sup><br>OPL530, OPL530-OC<br>OPL550-OCA, OPL551-OC, OPL551-OCA<br>OPL561-OC, OPL562-OC           | 35 V<br>35 V<br>35 V                                                  |
| Duration of Output Short to $V_{CC}$ or Ground<br>OPL550                                                                          | 1 second                                                              |
| Duration of Output Short to $V_{CC}$<br>OPL550-OCA, OPL551-OC, OPL551-OCA<br>OPL560, OPL561, OPL562, OPL563, OPL561-OC, OPL562-OC | 1 second<br>1 second                                                  |
| Low Level Output Current<br>OPL550, OPL551 Series                                                                                 | 16 mA                                                                 |
| High Level Output Current<br>OPL550, OPL551 Series                                                                                | 1 mA                                                                  |
| Irradiance<br>OPL550, OPL551 Series<br>OPL560, OPL561, OPL561-OC<br>OPL562, OPL562-OC, OPL563                                     | 10 mW/cm <sup>2</sup><br>9 mW/cm <sup>2</sup><br>3 mW/cm <sup>2</sup> |

**Notes:**

- (1) RMA flux is recommended. Duration can be extended to 10 sec. max. when flow soldering. For OPL530, OPL530-OC, OPL531A, OPL531-OCA, OPL535A, OPL535B, and OPL536A a maximum of 20 grams force may be applied to leads while at soldering temperatures.
- (2) Derate linearly 2.67 mW/ $^\circ\text{C}$  above  $70^\circ\text{C}$  for OPL530, OPL530-OC, OPL531A, OPL531-OC, OPL535A/B, and OPL536A. Derate linearly 2.5 mW/ $^\circ\text{C}$  above  $25^\circ\text{C}$  for all devices in the OPL550, OPL551, OPL560, OPL561, OPL562 and OPL563 series.
- (3) Irradiance measurements are made with  $\lambda_i = 935\text{ nm}$ .
- (4) This applies to OC versions only. For  $I_{CC}$  on pull-up versions, add  $V_{CC}/10\text{ K}\Omega$ .

**General Note**

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTeK Technology  
2900 E. Plano Pkwy, Plano, TX 75074 | Ph: +1 972 323 2200  
www.ttelectronics.com | sensors@ttelectronics.com

## Electrical Specifications

Electrical Characteristics ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

| SYMBOL      | PARAMETER                                                                                                                                                     | MIN        | TYP    | MAX        | UNITS                                | TEST CONDITIONS                                                                                |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|--------|------------|--------------------------------------|------------------------------------------------------------------------------------------------|
| $V_{CC}$    | Operating Supply Voltage<br>OPL530, OPL530-OC, OPL531, OPL531-OC<br>OPL535, OPL536<br>OPL560, OPL561 Series                                                   | 4.5        | -      | 16         | V                                    | -                                                                                              |
|             | OPL550, OPL551 Series                                                                                                                                         | 4.5        | -      | 5.5        | V                                    | -                                                                                              |
|             | Peak-to-Peak $V_{CC}$ Ripple Necessary to Cause False Triggering of Output<br>OPL530, OPL530-OC, OPL531, OPL531-OC<br>OPL535, OPL536<br>OPL560, OPL561 Series | -          | -      | 2          | V                                    | $f = \text{DC to } 50\text{ MHz}$                                                              |
|             | OPL550, OPL551 Series                                                                                                                                         | -          | 2      | -          | V                                    | $V_{CC} = 5\text{ V DC}, f = \text{DC to } 50\text{ MHz}$                                      |
| $I_{CC}$    | Supply Current <sup>(4)</sup><br>OPL530, OPL530-OC                                                                                                            | -          | 5      | 8          | mA                                   | $E_E = 0\text{ or } 1\text{ mW/cm}^2$                                                          |
|             | OPL550, OPL551 Series                                                                                                                                         | -          | 8      | 15         | mA                                   | $E_E = 0\text{ or } 3\text{ mW/cm}^2, V_{CC} = 5.5\text{ V}$                                   |
|             | OPL560, OPL561 Series                                                                                                                                         | -          | 8      | 12         | mA                                   | $E_E = 0\text{ or } 1\text{ mW/cm}^2$                                                          |
| $E_{ET(+)}$ | Positive-Going Threshold Irradiance <sup>(3)</sup><br>OPL530, OPL530-OC                                                                                       | 0.08       | -      | 0.40       | $\text{mW/cm}^2$                     | $T_A = 25^\circ\text{C}$                                                                       |
|             | OPL531A, OPL531-OCA<br>OPL535A, OPL536A                                                                                                                       | 0.08       | -      | 0.25       | $\text{mW/cm}^2$                     | $T_A = 25^\circ\text{C}$                                                                       |
|             | OPL535B                                                                                                                                                       | 0.12       | -      | 0.40       | $\text{mW/cm}^2$                     | $T_A = 25^\circ\text{C}$                                                                       |
|             | OPL550, OPL551-OC<br>OPL550A, OPL550-OCA, OPL551-OCA                                                                                                          | .25<br>.25 | -<br>- | 2.4<br>1.4 | $\text{mW/cm}^2$<br>$\text{mW/cm}^2$ | $V_{CC} = 5\text{ V}, T_A = 25^\circ\text{C}$<br>$V_{CC} = 5\text{ V}, T_A = 25^\circ\text{C}$ |

Electrical Characteristics ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

| SYMBOL                       | PARAMETER                                     | MIN  | TYP  | MAX | UNITS               | TEST CONDITIONS    |
|------------------------------|-----------------------------------------------|------|------|-----|---------------------|--------------------|
| $E_{ET(+)} / E_{ET(-)}$      | Hysteresis Ratio<br>OPL530, OPL531 Series     | 1.05 | 1.3  | 1.6 | -                   | -                  |
|                              | OPL535, OPL536 Series                         | 1.05 | 1.2  | 1.5 | -                   | -                  |
|                              | OPL550, OPL551 Series                         | 1.05 | 2    | 2.5 | -                   | -                  |
|                              | OPL560, OPL561 Series                         | 1.20 | 1.55 | 2   | -                   | -                  |
| $\Delta E_{ET(+)}(\Delta T)$ | Temperature Co-efficient<br>OPL530, OPL530-OC | -    | -0.6 | -   | $\%/^\circ\text{C}$ | $>0^\circ\text{C}$ |

### Notes:

- (1) RMA flux is recommended. Duration can be extended to 10 sec. max. when flow soldering. For OPL530 and OPL530-OC a maximum of 20 grams force may be applied to leads while at soldering temperatures.
- (2) Derate linearly  $2.67\text{ mW}/^\circ\text{C}$  above  $70^\circ\text{C}$  for OPL530 and OPL530-OC. Derate linearly  $2.5\text{ mW}/^\circ\text{C}$  above  $25^\circ\text{C}$  for all devices in the OPL550, OPL560, OPL561, OPL562 and OPL563 series.
- (3) Irradiance measurements are made with  $\lambda_i = 935\text{ nm}$ .
- (4) This applies to OC versions only. For  $I_{CC}$  on pull-up versions, add  $V_{CC}/10\text{ K}\Omega$ .

### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTeK Technology  
2900 E. Plano Pkwy, Plano, TX 75074 | Ph: +1 972 323 2200  
www.ttelectronics.com | sensors@ttelectronics.com

## Electrical Specifications

Electrical Characteristics ( $T_A = 25^\circ \text{C}$  unless otherwise noted)

| SYMBOL   | PARAMETER                                                     | MIN            | TYP  | MAX  | UNITS         | TEST CONDITIONS                                                                       |
|----------|---------------------------------------------------------------|----------------|------|------|---------------|---------------------------------------------------------------------------------------|
| $V_{OH}$ | Operating Supply Voltage<br>OPL550                            | 2.4            | 3.3  | -    | V             | $V_{CC} = 4.5 \text{ V}$ , $I_{OH} = -800 \mu\text{A}$ ,<br>$E_E = 3 \text{ mW/cm}^2$ |
|          | OPL560                                                        | $V_{CC} - 2.1$ | -    | -    | V             | $I_{OH} = -1 \mu\text{A}$ , $E_E = 1 \text{ mW/cm}^2$                                 |
|          | OPL561                                                        | $V_{CC} - 2.1$ | -    | -    | V             | $I_{OH} = -1 \mu\text{A}$ , $E_E = 0$                                                 |
| $V_{OL}$ | Low Level Output Voltage<br>OPL530, OPL530-OC                 | -              | 0.2  | 0.4  | V             | $I_{OL} = 16 \text{ mA}$ , $E_E = 0$                                                  |
|          | OPL550                                                        | -              | 0.25 | 0.4  | V             | $V_{CC} = 4.5 \text{ V}$ , $I_{OL} = 12.8 \text{ mA}$ , $E_E = 0$                     |
|          | OPL560                                                        | -              | -    | 0.4  | V             | $I_{OL} = 16 \text{ mA}$ , $E_E = 0$                                                  |
|          | OPL561, OPL561-OC                                             | -              | -    | 0.4  | V             | $I_{OL} = 16 \text{ mA}$ , $E_E = 1 \text{ mW/cm}^2$                                  |
| $I_{OS}$ | Short Circuit Output Current<br>OPL550                        | -20            | -55  | -100 | mA            | $V_{CC} = 5.5 \text{ V}$ , Output = GND,<br>$E_E = 3 \text{ mW/cm}^2$                 |
| $I_{OH}$ | High Level Output Current <sup>(4)</sup><br>OPL530, OPL530-OC | -              | 0.1  | 10   | $\mu\text{A}$ | $V_{OH} = 30 \text{ V}$ , $E_E = 1 \text{ mW/cm}^2$                                   |
|          | OPL550-OCA                                                    | -              | 1    | 100  | $\mu\text{A}$ | $V_{CC} = 4.5 \text{ V}$ , $V_{OH} = 30 \text{ V}$ ,<br>$E_E = 3 \text{ mW/cm}^2$     |
|          | OPL551-OC, OPL551-OCA                                         | -              | 1    | 100  | $\mu\text{A}$ | $V_{CC} = 4.5 \text{ V}$ , $V_{OH} = 30 \text{ V}$ , $E_E = 0$                        |
|          | OPL561-OC                                                     | -              | -    | 100  | $\mu\text{A}$ | $V_{OH} = 30 \text{ V}$ , $E_E = 0$                                                   |

### Notes:

- (1) RMA flux is recommended. Duration can be extended to 10 sec. max. when flow soldering. For OPL530 and OPL530-OC a maximum of 20 grams force may be applied to leads while at soldering temperatures.
- (2) Derate linearly 2.67 mW/ $^\circ \text{C}$  above  $70^\circ \text{C}$  for OPL530 and OPL530-OC. Derate linearly 2.5 mW/ $^\circ \text{C}$  above  $25^\circ \text{C}$  for all devices in the OPL550, OPL560, OPL561, OPL562 and OPL563 series.
- (3) Irradiance measurements are made with  $\lambda_i = 935 \text{ nm}$ .
- (4) This applies to OC versions only. For  $I_{CC}$  on pull-up versions, add  $V_{CC}/10 \text{ K}\Omega$ .

### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

## Electrical Specifications

Electrical Characteristics ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

| SYMBOL | PARAMETER                         | MIN    | TYP    | MAX       | UNITS | TEST CONDITIONS                                                                                                                                            |
|--------|-----------------------------------|--------|--------|-----------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $t_r$  | Output Rise Time<br>OPL530        | -      | 1500   | -         | ns    | $E_E = 0$ or $1\text{ mW/cm}^2$ , $C_L = 50\text{ pF}$ , $10\text{K P.U.}$                                                                                 |
|        | OPL530-OC                         | -      | 50     | -         | ns    | $E_E = 0$ or $1\text{ mW/cm}^2$ , $R_L = 300\ \Omega$ to $5\text{ V}$ , $C_L = 50\text{ pF}$                                                               |
|        | OPL550                            | -      | 25     | 70        | ns    | $V_{CC} = 5\text{ V}$ , $T_A = 25^\circ\text{C}$ , $E_E = 0$ or $3\text{ mW/cm}^2$ , $f = 10\text{ kHz}$ , $\text{DC} = 50\%$ , $R_L = 8\text{ TTL loads}$ |
|        | OPL550-OCA, OPL551-OC, OPL551-OCA | -      | 25     | 70        | ns    | $V_{CC} = 5\text{ V}$ , $T_A = 25^\circ\text{C}$ , $E_E = 0$ or $3\text{ mW/cm}^2$ , $f = 10\text{ kHz}$ , $\text{DC} = 50\%$ , $R_L = 360\ \Omega$        |
|        | OPL560, OPL561<br>OPL561-OC       | -<br>- | -<br>- | 70<br>100 | ns    | $T_A = 25^\circ\text{C}$ , $E_E = 0$ or $1\text{ mW/cm}^2$ , $f = 10\text{ kHz}$ , $\text{DC} = 50\%$ , $R_L = 360\ \Omega$                                |
| $t_r$  | Output Rise Time<br>OPL530        | -      | -      | -         | ns    | $E_E = 0$ or $1\text{ mW/cm}^2$ , $C_L = 50\text{ pF}$                                                                                                     |
|        | OPL530-OC                         | -      | -      | -         | ns    | $E_E = 0$ or $1\text{ mW/cm}^2$ , $R_L = 300\ \Omega$ to $5\text{ V}$ , $C_L = 50\text{ pF}$                                                               |
|        | OPL550-OCA, OPL551-OC, OPL551-OCA | -      | 25     | 70        | ns    | $V_{CC} = 5\text{ V}$ , $T_A = 25^\circ\text{C}$ , $E_E = 0$ or $3\text{ mW/cm}^2$ , $R_L = 8\text{ TTL loads}$ , $f = 10\text{ kHz}$ , $\text{DC} = 50\%$ |
|        | OPL561-OC                         | -      | -      | 70        | ns    | $V_{CC} = 5\text{ V}$ , $T_A = 25^\circ\text{C}$ , $E_E = 0$ or $3\text{ mW/cm}^2$ , $R_L = 8\text{ TTL loads}$ , $f = 10\text{ kHz}$ , $\text{DC} = 50\%$ |
|        | OPL560, OPL561                    | -      | -      | 70        | ns    | $T_A = 25^\circ\text{C}$ , $E_E = 0$ or $1\text{ mW/cm}^2$ , $f = 10\text{ kHz}$                                                                           |
|        | OPL561-OC                         | -      | -      | 100       | ns    | $T_A = 25^\circ\text{C}$ , $E_E = 0$ or $1\text{ mW/cm}^2$ , $f = 10\text{ kHz}$                                                                           |
| $t_f$  | Output Fall Time<br>OPL530        | -      | 20     | -         | ns    | $E_E = 0$ or $1\text{ mW/cm}^2$ , $C_L = 50\text{ pF}$                                                                                                     |
|        | OPL530-OC                         | -      | 20     | -         | ns    | $E_E = 0$ or $1\text{ mW/cm}^2$ , $R_L = 300\ \Omega$ to $5\text{ V}$ , $C_L = 50\text{ pF}$                                                               |
|        | OPL550-OCA, OPL551-OC, OPL551-OCA | -      | 25     | 70        | ns    | $V_{CC} = 5\text{ V}$ , $T_A = 25^\circ\text{C}$ , $E_E = 0$ or $3\text{ mW/cm}^2$ , $R_L = 360\ \Omega$ , $f = 10\text{ kHz}$ , $\text{DC} = 50\%$        |
|        | OPL560, OPL561<br>OPL561-OC       | -<br>- | -<br>- | 70<br>100 | ns    | $T_A = 25^\circ\text{C}$ , $E_E = 0$ or $1\text{ mW/cm}^2$ , $f = 10\text{ kHz}$                                                                           |

Notes:

- (1) RMA flux is recommended. Duration can be extended to 10 sec. max. when flow soldering. For OPL530 and OPL530-OC a maximum of 20 grams force may be applied to leads while at soldering temperatures.
- (2) Derate linearly  $2.67\text{ mW}/^\circ\text{C}$  above  $70^\circ\text{C}$  for OPL530 and OPL530-OC. Derate linearly  $2.5\text{ mW}/^\circ\text{C}$  above  $25^\circ\text{C}$  for all devices in the OPL550, OPL560, OPL561, OPL562 and OPL563 series.
- (3) Irradiance measurements are made with  $\lambda_i = 935\text{ nm}$ .
- (4) This applies to OC versions only. For  $I_{CC}$  on pull-up versions, add  $V_{CC}/10\text{ K}\Omega$ .

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

## Electrical Specifications

Electrical Characteristics ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

| SYMBOL             | PARAMETER                                               | MIN | TYP | MAX | UNITS         | TEST CONDITIONS                                                                                                                                                  |
|--------------------|---------------------------------------------------------|-----|-----|-----|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $t_{pE_{ET}(+)}$   | Propagation Delay<br>OPL530                             | -   | 1.0 | -   | $\mu\text{s}$ | $E_E = 0$ or $1\text{ mW/cm}^2$ , $R_L = 300\ \Omega$ to $5\text{ V}$ ,<br>$C_L = 50\text{ pF}$                                                                  |
|                    | OPL530-OC                                               | -   | 1.0 | -   | $\mu\text{s}$ | $E_E = 0$ or $1\text{ mW/cm}^2$ , $R_L = 300\ \Omega$ to $5\text{ V}$ ,<br>$C_L = 50\text{ pF}$                                                                  |
|                    | OPL550-OCA, OPL551-OC, OPL551-OCA                       | -   | 2.5 | 5   | $\mu\text{s}$ | $V_{CC} = 5\text{ V}$ , $T_A = 25^\circ\text{C}$ ,<br>$E_E = 0$ or $3\text{ mW/cm}^2$ , $R_L = 8\text{ TTL loads}$ ,<br>$f = 10\text{ kHz}$ , $\text{DC} = 50\%$ |
| $t_{pE_{ET}(-)}$   | Propagation Delay<br>OPL530<br>OPL530-OC                | -   | 3.0 | -   | $\mu\text{s}$ | $E_E = 0$ or $1\text{ mW/cm}^2$ , $R_L = 300\ \Omega$ to $5\text{ V}$ ,<br>$C_L = 50\text{ pF}$                                                                  |
|                    | OPL550-OCA, OPL551-OC, OPL551-OCA                       | -   | 2.5 | 5   | $\mu\text{s}$ | $V_{CC} = 5\text{ V}$ , $T_A = 25^\circ\text{C}$ , $E_E = 0$ or $3\text{ mW/cm}^2$ ,<br>$R_L = 360\ \Omega$ , $f = 10\text{ kHz}$ , $\text{DC} = 50\%$           |
| $t_{PLH}, t_{PHL}$ | Propagation Delay (Low-High/High-Low)<br>OPL560, OPL561 | -   | 5   | -   | $\mu\text{s}$ | $\text{DC} = 50\%$ , $R_L = 10\text{ TTL Loads}$                                                                                                                 |
|                    | OPL561-OC                                               | -   | 5   | -   | $\mu\text{s}$ | $\text{DC} = 50\%$ , $R_L = 300\ \Omega$                                                                                                                         |

### Notes:

- (1) RMA flux is recommended. Duration can be extended to 10 sec. max. when flow soldering. For OPL530, OPL530-OC and OPL536A a maximum of 20 grams force may be applied to leads while at soldering temperatures.
- (2) Derate linearly  $2.67\text{ mW}/^\circ\text{C}$  above  $70^\circ\text{C}$  for OPL530, OPL530-OC, OPL531, OPL531-OCA, OPL535 and OPL536A. Derate linearly  $2.5\text{ mW}/^\circ\text{C}$  above  $25^\circ\text{C}$  for all devices in the OPL550, OPL551, OPL560, OPL561, OPL562 and OPL563 series.
- (3) Irradiance measurements are made with  $\lambda_i = 935\text{ nm}$ .
- (4) This applies to OC versions only. For  $I_{CC}$  on pull-up versions, add  $V_{CC}/10\text{ K}\Omega$ .

### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.