
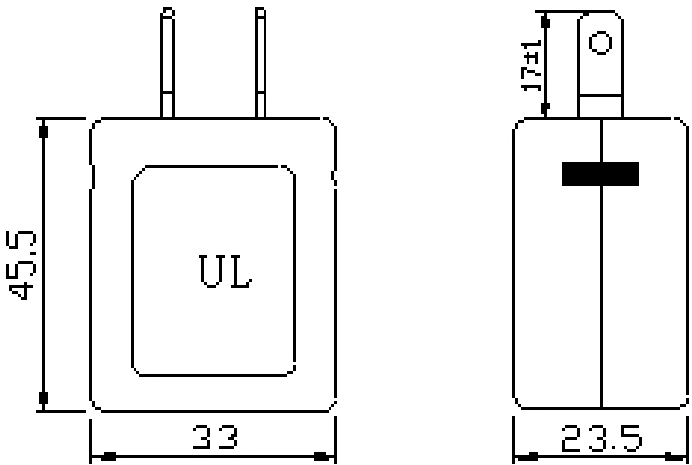


UL / ULW 110 12W Series For Portable Switching AC/DC Adaptor

MODEL	INPUT	OUTPUT
UL(W)110-0320	AC100V~120V (50/60Hz)	3.0V 2.0A
UL(W)110-3320		3.3V 2.0A
UL(W)110-0416		4.5V 1.6A
UL(W)110-0515		5.0V 1.5A
UL(W)110-0520		5.0V 2.0A
UL(W)110-0618		6.0V 1.8A
UL(W)110-0913		9.0V 1.3A
UL(W)110-1210		1 2V 1.0A
UL(W)110-1508		1 5V 0.8A

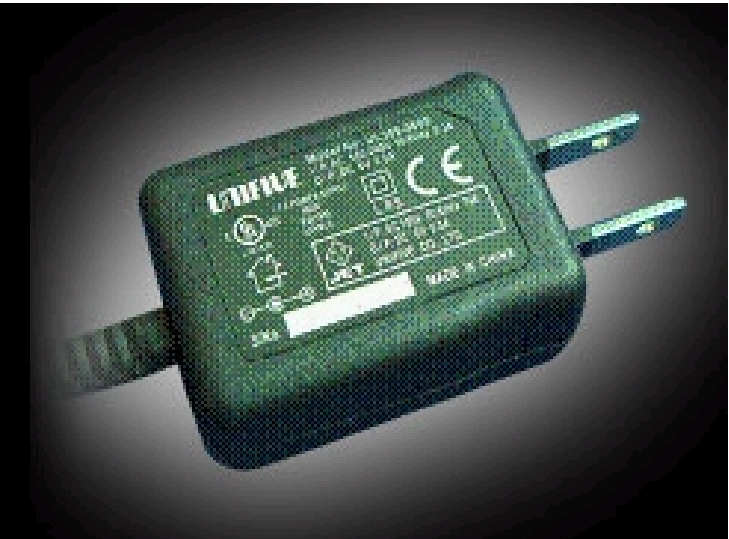


DIMENSION: L*W*H::45.5*33*23.5

FEATURE

- ? Constant Voltage Mode
- ? Super Mini Size and Easy Portable
- ? Light & Convenient Plug In
- ? Wall Mount Type

APPLICATION

- ? Lithium Ion Battery Charger
- ? Digital Camera
- ? CD-ROM & HUB
- ? Communication Terminals
- ? Wireless Lan Station
- ? Hard Disk
- ? Portable Device Or Machine

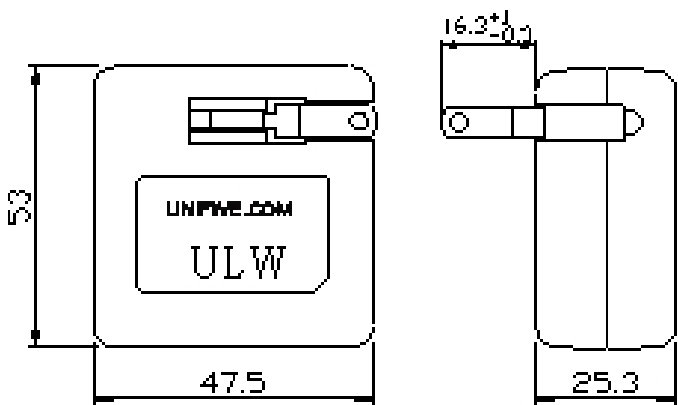

DIMENSION: L*W*H:53*47.5*25.3

INPUT/OUTPUT SPECIFICATION

Input Voltage:	AC100V-120V,50/60Hz
Range Voltage:	AC 90V-132V,,47/63Hz
Output Power:	12W
Output Voltage:	3V-15V
Over Current Protection:	120% Min
Over Voltage Protection:	120% Min
Short Protection:	Auto Recovery
Load Regulation:	±5%

GENERAL SPECIFICATION

Operating Temperature:	0 ~ 40?
Operating Relative Humidity:	5 ~ 95%RH
Storage Temperature:	-20 ~ 85 ?
Withstanding Voltage:	AC 2000V/Min (between Input & Output),10mA(Max.)
Insulation Resistance:	DC 500V 100M?(Min.) (between Input & Output)
Efficiency:	65% Min

SAFETY

- ? UL110 : UL/CUL, PSE-MARK, BSMI
- ? ULW110 : UL/CUL, PSE-MARK, BSMI

UNIFIVE CO.,LTD.

3-33-14 Nakakasai, Edogawa -ku Tokyo Japan 134 -0083
TEL ? +81-3-5605-3222 FAX? +81-3-5605-3220

UNIFIVE TECHNOLOGY CO.,LTD.

4F., No.269, Siangyang Rd., Fongyuan City, Taichung County 420, Taiwan (R.O.C.)
TEL ? +886-4-2523 -0886 FAX? + 886-4-2523 -0913