


US10/US30 12W Series For Portable Switching AC/DC Adaptor

MODEL	INPUT	OUTPUT	
US100320	AC100V~120V (50/60Hz)	3.3V	2.0A
US100520		5.0V	2.0A
US100523		5.0V	2.3A
US100520		5.5V	2.0A
US100620		6.0V	2.0A
US100716		7.5V	1.6A
US100913		9.0V	1.3A
US101210		1 2V	1.0A
US101508		1 5V	0.8A
US300320		3.3V	2.0A
US300520	AC100V~240V (50/60Hz)	5.0V	2.0A
US300523		5.0V	2.3A
US305520		5.5V	2.0A
US300620		6.0V	2.0A
US307516		7.5V	1.6A
US300913		9.0V	1.3A
US301210		1 2V	1.0A
US301508		1 5V	0.8A
USC312-1427		14.2V	0.27A

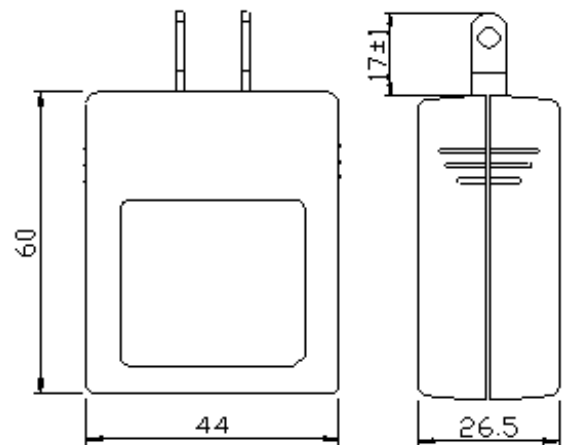

DIMENSION: L*W*H: 60*44*26.5

FEATURE:

- Constant Voltage Mode
- Super Mini Size and Easy Portable
- Light & Convenient Plug In
- Wall Mount Type

APPLICATION:

- Mini Note Book PC
- Digital Camera
- CD-ROM & HUB
- Communication Terminals
- Wireless Lan Station
- Hard Disk
- Portable Device Or Machine

INPUT/OUTPUT SPECIFICATIONS:

Input Voltage:	AC100V-120V, AC100V-240V, 50/60Hz
Range Voltage:	AC 90V-132V, AC?90V-264V, 47/63Hz
Output Power:	12W
Output Voltage:	3.3V-14.2V
Over Current Protection:	120% Min
Over Voltage Protection:	120% Min
Short Protection:	Auto Recovery
Load Regulation:	±5%

GENERAL SPECIFICATIONS:

Operating Temperature:	0 ~ 40
Operating Relative Humidity:	5 ~ 95%RH
Storage Temperature:	-20 ~ 85
Withstanding Voltage:	AC 2000V/Min (between Input & Output),10mA(Max.) AC 3000V/Min (between Input & Output),10mA(Max.)
Insulation Resistance:	DC500V 100M Ω (Min.) (between Input & Output)
Efficiency:	70% Min

SAFETY:

- US10 : PSE-MARK,UL/CUL,BSMI
- US30 : PSE-MARK,UL/CUL,CE,CB,BSMI

UNIFIVE CO.,LTD.

3-33-14 Nakakasai, Edogawa-ku Tokyo Japan 134-0083
TEL : +81-3-5605-3222 FAX : +81-3-5605-3220

UNIFIVE TECHNOLOGY CO.,LTD.

4F., No.269, Siangyang Rd., Fongyuan City, Taichung County 420, Taiwan (R.O.C.)
TEL : +886-4-2523-0886 FAX : + 886-4-2523-0913

Copyright UNIFIVE TECHNOLOGY CO.,LTD. [Taiwan Products](#), [B2BChinaSources](#), [B2BManufactures](#)