

UP0701F-() ()P SERIES

70 Watt AC/DC Adapter

- ◆ Universal Input 90 to 264 VAC
- ◆ EMI Meets FCC/CISPR 22 Class B
- ◆ Meet IEC61000-3-2 Harmonic Regulation
- ◆ Active Power Factor Correction
- ◆ No Load Input Power Consumption Less than 0.5 Watt at 240 VAC Input
- ◆ RoHS Compliant
- ◆ Meet CEC Efficiency Level: (TV)

Green Product
RoHS



SPECIFICATIONS

All specifications are typical at nominal line, full load and 25°C unless otherwise noted.

INPUT SPECIFICATIONS

Input Voltage Range 90-264VAC
Input Frequency 47-63 Hz
Inrush Current 80A max.(Cold Start)
Power Factor 95% min. @100VAC / 60HZ
90%min. @ 240VAC / 50HZ

GENERAL SPECIFICATIONS

Hold-up Time 10mS typ.
Leakage current 0.75mA max. @240VAC/50HZ
Short Circuit Protection Continuous
Overvoltage Protection(Recycle) All Models
Overload Protection..... 110-160% of rated valued
Continuous Output Power 72W max.
Hi-pot Isolation: Input / Output 4242 VDC

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature Range 0°C to 40°C
Derating O/P Power 40°C to 50°C..... 2%/°C
Temperature Coefficient ±0.02%/°C
Storage Temperature Range -40°C to +85°C
Humidity, Non-Condensing 0 to 95% RH
Cooling Free- Air Convection
EMI Meets FCC/CISPR 22 Class B Specification



**UNIVERSAL
MICROELECTRONICS**

UP0701F -() ()P SERIES

1 of 2

HEAD OFFICE:3,27TH RD., TAICHUNG INDUSTRIAL
PARK,TAICHUNG, TAIWAN, R.O.C.
TEL: 886-4-23590096 FAX: 886-4-23590129
HAO YE RD.,TONG FU YU INDUSTRIAL PARK ,FU
YONG TOWN,BAO AN ,SHENZHEN ,CHINA
Tel:(86-755)27335666 Fax:(86-755)27335888
<http://www.umec-web.com/>

REV.0

OUTPUT SPECIFICATIONS


Model Number	Output Voltage (Volts)	Output Current (Amps)		Max. Power (watt)	Efficiency	Ripple ¹ P-P (mV)	Total Regulation ²
		Min.	Rated				
UP0701F-12P	12	0	5.84	70	Meet CEC Efficiency Level: (IV)	120	±5%
UP0701F-15P	15	0	4.6	70		150	±5%
UP0701F-16P	16	0	4.5	72		150	±5%
UP0701F-24P	24	0	3.0	72		240	±5%

NOTES:

1. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to the output cable. Peak to peak and RMS metering equipment shall have a 20 MHz response with probes and cables maintaining frequency response from 200 Hz to 20MHz bandwidth. Output ripple and spikes are measured directly at the output terminals of the power supply without the use of the probe ground clip.
2. Total regulation is defined as the static output regulation at 25°C, including initial tolerance, line voltage and load current within stated limits.

PHYSICAL SPECIFICATIONS

Weight : 450g

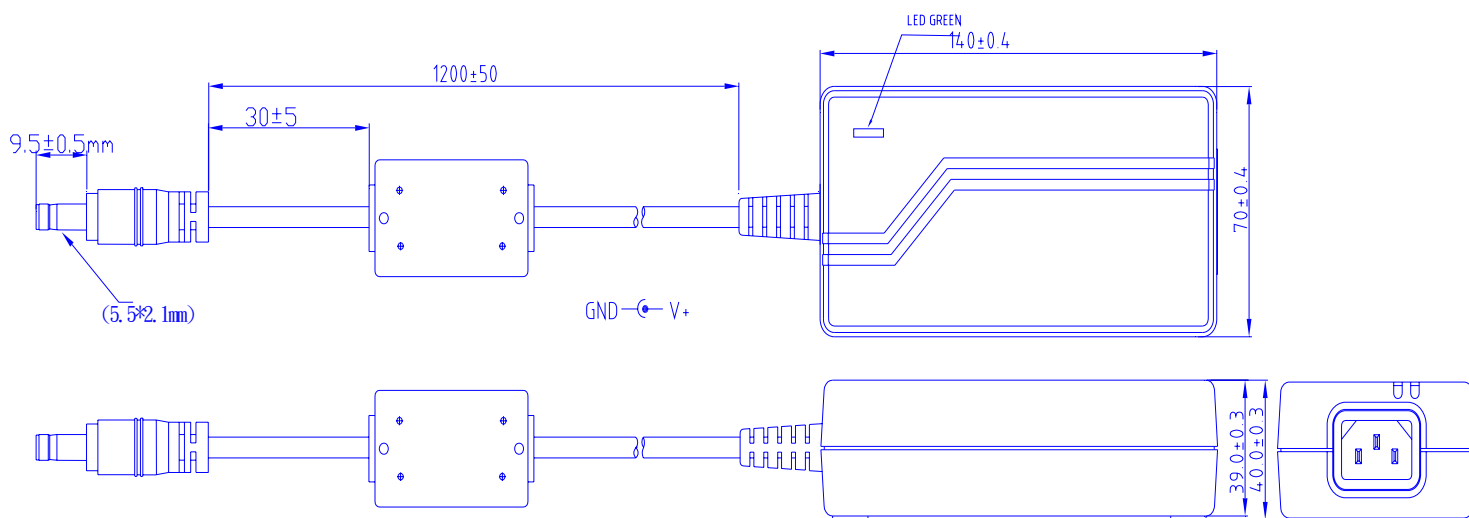

DC plug & pin assignment (CUSTOM DESIGN IS AVAILABLE)

IN 2.1(±0.2)/ OUT 5.5(±0.2)/ LENGTH 9.5(±0.5)(mm) DC PLUG FEMALE

NOTES:

1. All dimensions in millimeter



**UNIVERSAL
MICROELECTRONICS**

UP0701F -()()P SERIES

2 of 2

HEAD OFFICE:3,27TH RD., TAICHUNG INDUSTRIAL
PARK,TAICHUNG, TAIWAN, R.O.C.
TEL: 886-4-23590096 FAX: 886-4-23590129
HAO YE RD.,TONG FU YU INDUSTRIAL PARK ,FU
YONG TOWN,BAO AN ,SHENZHEN ,CHINA
Tel:(86-755)27335666 Fax:(86-755)27335888
<http://www.umec-web.com/>

REV.0