

SMD 0805, PTC Thermistors for Over-Temperature Protection



FEATURES

- Well-defined protection temperature levels
- Very fast reaction time
- Accurate resistance for ease of circuit design
- Excellent long term behavior
- Small size and rugged
- UL approved according standard UL1434 (file: E148885)
- PTC thermistor with lead (Pb)-free terminations
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912


RoHS
COMPLIANT

QUICK REFERENCE DATA

PARAMETER	VALUE	UNIT
Resistance at 25 °C	235 to 705	Ω
Nominal working temperature (T _n)	70 to 140	°C
Maximum voltage	25	V
Dissipation factor	~ 3.5	mW/K
Operating temperature range ⁽¹⁾	-40 to 155	°C
Weight	~ 0.015	g

Note

- ⁽¹⁾ Max operating temperature range is T_n + 15 °C, indicated value is for T_n = 140 °C.

NOMINAL WORKING TEMPERATURE AND ORDERING INFORMATION

SAP ORDERING NUMBER	NOMINAL WORKING TEMPERATURE
TAPE AND REEL	T _n (°C)
PTCSS12T071DTE	70
PTCSS12T081DTE	80
PTCSS12T091DTE	90
PTCSS12T101DTE	100
PTCSS12T111DTE	110
PTCSS12T121DTE	120
PTCSS12T131DTE	130
PTCSS12T141DTE	140

APPLICATIONS

Over-temperature protection and control in:

- Industrial electronics
- SMPS
- Electronic data processing
- Motor protection
- LED-drivers and control
- Power inverters


DESCRIPTION

These PTC sensing thermistors consist of a medium resistivity doped barium titanate ceramic beam, glass coated and have tin plated nickel barrier over silver electrodes compatible with wave or reflow soldering technology.

PACKAGING

PTC thermistors are available in paper tape on reel with an SPQ of 4000 pieces.

COMPONENT OUTLINE DIMENSIONS (in mm)



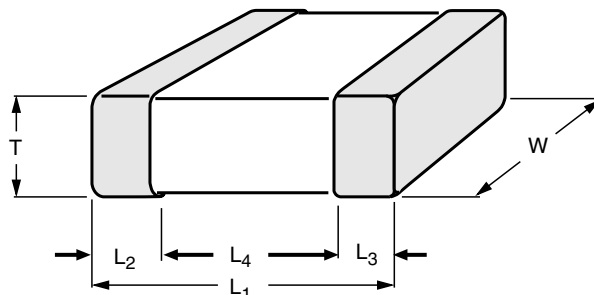


L ₁	W	T	L ₂ and L ₃ MIN.
2.00 ± 0.2	1.25 ± 0.2	0.90 ± 0.15	0.4 ± 0.25



ELECTRICAL CHARACTERISTICS	
PARAMETER	VALUES
Resistance at 25 °C	470 Ω \pm 50 %
Maximum resistance at -40 °C	2500 Ω
Maximum resistance at (T _n - 5) °C	4700 Ω
Minimum resistance at (T _n + 5) °C	4700 Ω
Minimum resistance at (T _n + 15) °C	15 000 Ω
Maximum voltage	25 V (AC or DC)

TYPICAL RESISTANCE/TEMPERATURE CHARACTERISTIC

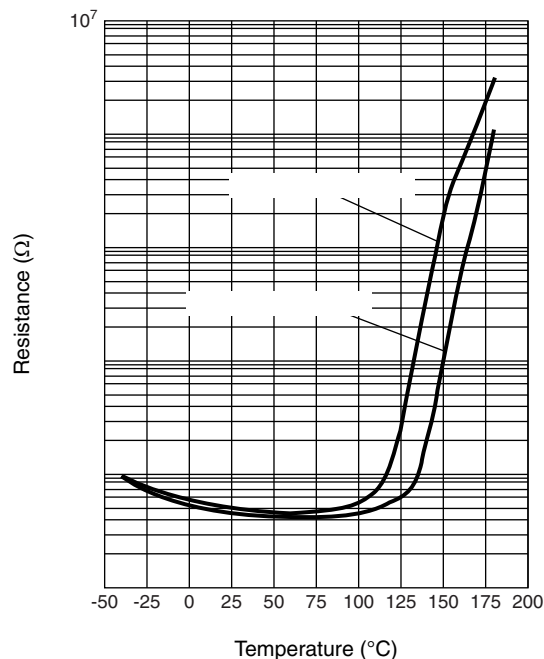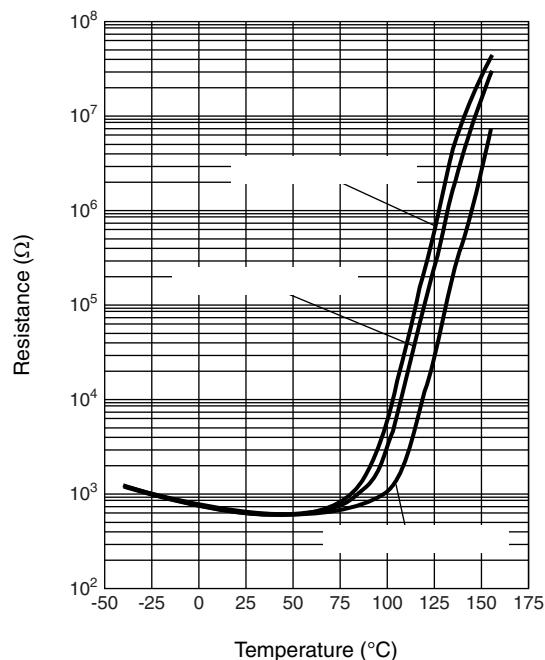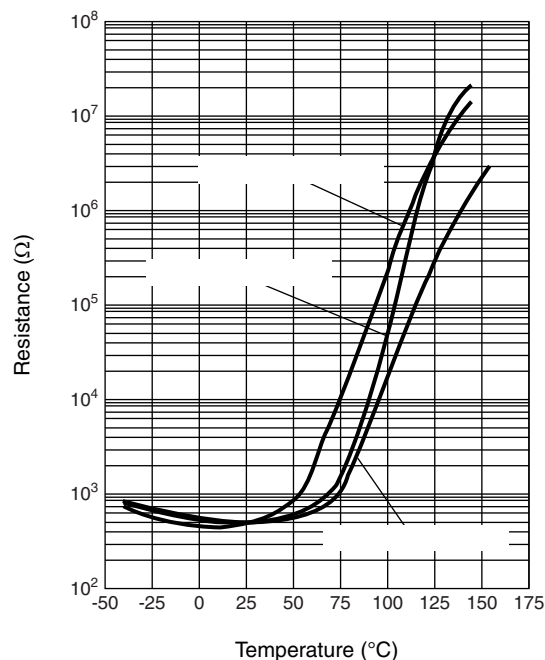



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.