


- NOTES:
- MOUNTING: Mounts in a $\varnothing .281 \pm .002$ [$\varnothing 7.13\text{mm} \pm .05$] panel hole on .375 [9.5mm] centers. Panel thickness .031 [0.8mm] to .250 [6.35mm]. Panel hole should be deburred, but not chamfered.
 - ASSEMBLY: Insert lens through panel hole, slide RNG 268 retainer on back of lens. PCB mounted LEDs slide into lens when the panel cover is closed or the PCB card is inserted into the case.
 - MATERIAL: Polycarbonate, UL 94-V2
 - U.S. & Foreign Pat. Issued & Pend.

RETAINER
(ORDER SEPARATELY)






RNG 268

ORDERING CODE : **CMC 313 XXX**

MODEL

LENS COLOR	
RTP	RED TRANSPARENT
ATP	AMBER TRANSPARENT
GTP	GREEN TRANSPARENT
BTP	BLUE TRANSPARENT
YTP	YELLOW TRANSPARENT
CTP	CLEAR TRANSPARENT

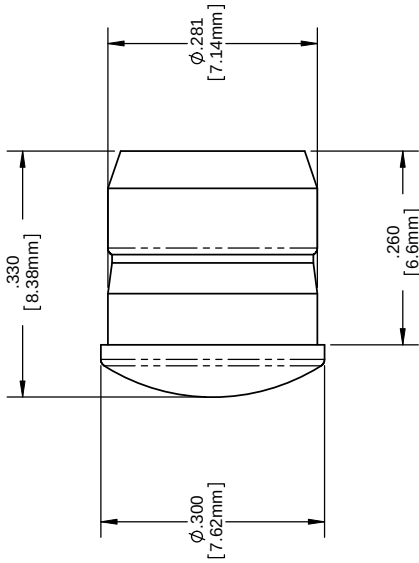

REVISIONS		DATE	INITIALS
ECN#	REV.		
	001	4-23-10	SMU

REVISIONS
DESCRIPTION
REVISED PER ECR11009AZ01

MATERIAL POLYCARBONATE, UL 94-V2	VISUAL COMMUNICATIONS COMPANY, INC. 150 Bostwick Boulevard, Suite 001 San Marcos, CA 92069 USA Phone: (760) 560-5300 Fax: (760) 560-1301 email: vccsales@vcc-illc.com	
	TITLE: 5MM ROUND PLAIN DIFFUSED LENS	
SEE NOTES	APPROVAL	DATE
	DRAWN: SMU	4-23-10
CHECKED: DO NOT SCALE DRAWING	SIZE DWG. NO.	
	B CMC 313 XXX	
SCALE: 1:1		REV 001