

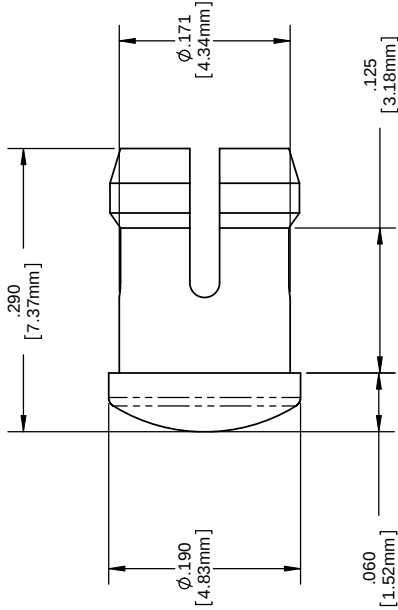


- NOTES:
1. MOUNTING: Mounts in a $\phi .171 \pm .002$ [$\phi 4.34\text{mm} \pm .05$] panel hole on .250 [6.35mm] centers. Panel thickness .063 [1.6mm] to .125 [3.17mm]. Panel hole should be deburred, but not chamfered.
 2. ASSEMBLY: Insert lens through panel hole, and insert LED into lens.
 3. MATERIAL: Polycarbonate, UL 94-V2
 4. GLO Series: Polycarbonate & Acrylic blend
 5. U.S. & Foreign Pat. Issued & Pend.


REVISIONS			
ECN#	REV.	DESCRIPTION	DATE
	1	ADD GLO SERIES	12-30-08
	001	REVISED PER ECR11009A201	4-23-10
			SMU



ORDERING CODE : **SMB 200 XXX**

MODEL

LENS COLOR	
RTP	RED TRANSPARENT
ATP	AMBER TRANSPARENT
GTP	GREEN TRANSPARENT
BTP	BLUE TRANSPARENT
YTP	YELLOW TRANSPARENT
CTP	CLEAR TRANSPARENT
GLO	WHITE TRANSLUCENT



MATERIAL		POLYCARBONATE, UL 94-V2		VISUAL COMMUNICATIONS COMPANY, INC.	
FINISH		SEE NOTES		150 Bessick Boulevard, Suite 001 San Marcos, CA 92069 USA	
APPROVAL		DATE		Phone: (760) 360-5300 Fax: (760) 360-1301 Email: vcsales@vcc-ill.com	
DRAWN:		SMU		TITLE: 3MM ROUND LOW PROFILE FRESNEL LENS	
CHECKED:		DL		SIZE DWG. NO.	
DO NOT SCALE DRAWING		4-23-10		B SMB 200 XXX	
				REV	
				SCALE: 1:1	
				SHEET 1 OF 1	