
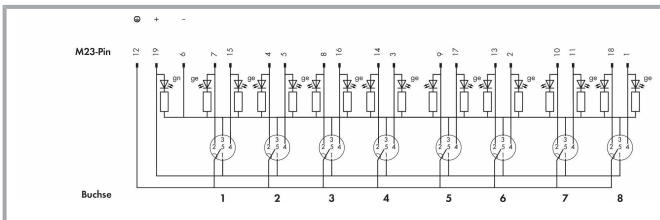


Data sheet | Item number: 757-185

M12 sensor/actuator box; 8-way; 5-pole; M23 connector


www.wago.com/757-185

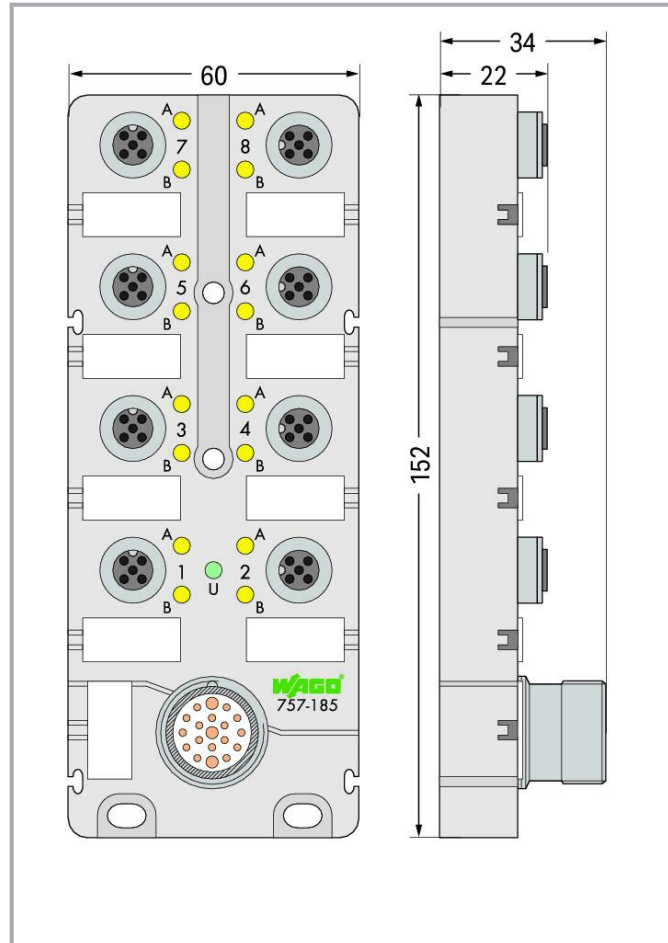

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

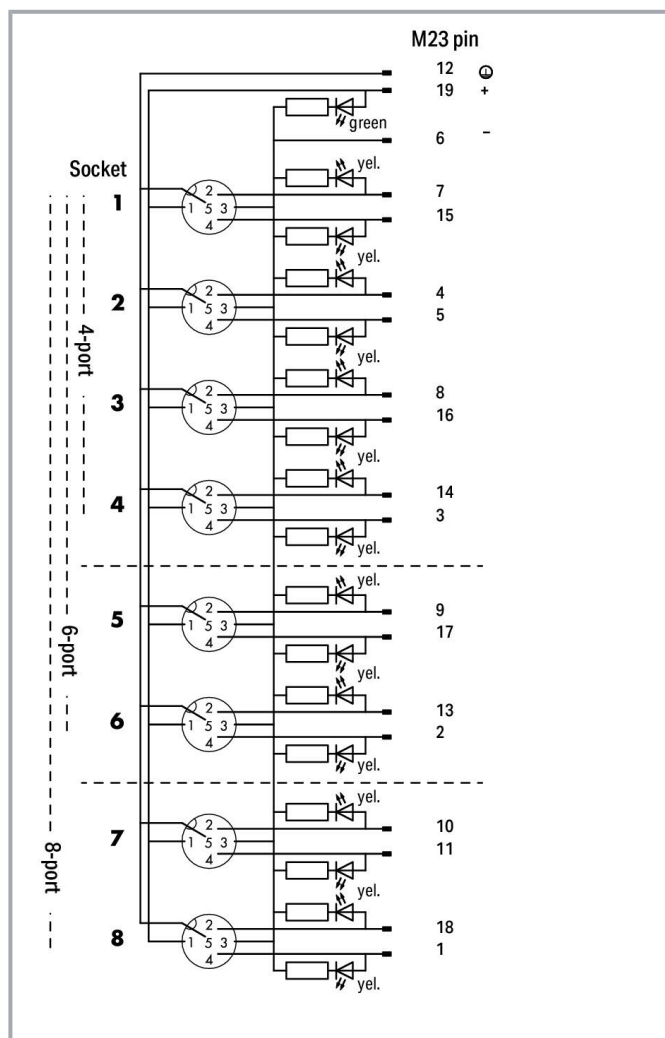

Item description

- M12 sensor/actuator box, 8-way
- 5-pole (2 signals per contact)
- M23 connector (19-pole)
- Green LED operating indicator
- Yellow LED status indicator
- incl. markers (10 pcs)
- incl. M12 protective caps (2 pcs)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Data

Technical data

Contact resistance (max.)	0.01 Ω
Supply voltage	10 ... 30 VDC; Rated voltage: 32 V ~ rms
Current carrying capacity (signal connections)	2 A
Current carrying capacity (supply connections)	9 A
Rated value of electrical isolation	500 V
Functionally separated potential groups	Kontakt/Kontakt
Insulation resistance	$>10^9 \Omega$
Signal characteristics	PNP
Indicators	LED (A, B) yellow: Signal status (2 x per contact); LED (U) green: Sensor/actuator box status

Connection data

Connection technology: inputs/outputs	8 x M12 socket; 5-pole; incl. ground
Connection technology: trunk cable	1 x M23 plug; 19-pole

Physical data

Width	60 mm / 2.362 inches
Height	34 mm / 1.339 inches
Depth	152 mm / 5.984 inches

Mechanical data

Mounting type	Screw mounting
Weight	240 g

Material data

Housing material	PA 66 (UL 94 V0); RAL 7035; silicon and halogen free
Material properties of the connections	Contact: CuSn, nickel base-coat plating and 0.8 μ m gold-plated; Threaded bush: die-cast Zn, nickel-plated; Seal: Viton; 50 mating cycles
Encapsulation	Fully encapsulated with conformal coating (UL 94 V0)

Environmental requirements

Ambient temperature (operation)	-25 ... +80 °C
---------------------------------	----------------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Protection type	IP67
Note on protection type	per EN 60529 (NEMA 6 & 6P) in fully locked position with its plugs or protective caps
Pollution degree	3 per VDE 0110
Vibration resistance	per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27

Commercial data

eCl@ss 10.0	27-44-01-11
eCl@ss 9.0	27-44-01-08
ETIM 9.0	EC003558
ETIM 8.0	EC003558
Recupel Type	
ECCN	NO DATA
PU (SPU)	1 pcs
Packaging type	box
Country of origin	DE
GTIN	4050821054344
Customs tariff number	85366990990

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant, With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	9c6afcaf-7a71-48cc-b0cc-ee1cf242a313
SCIP notification number (Belgium)	9eb131bb-74df-4725-9cef-88f7f5e6127a
SCIP notification number (Bulgaria)	83796fd7-8e46-41b5-81cf-23dbd95c6097
SCIP notification number (Czech Republic)	ed4d6d9d-6abf-4b9a-9415-54ca8bbcab97
SCIP notification number (Denmark)	e9d05182-5036-498e-9172-17a4c3c7cbd1
SCIP notification number (Finland)	6149b298-c416-4b2d-8ef5-bfa20b6c9221
SCIP notification number (France)	2de6f2fd-eb66-4547-b3e4-bfa837255a24
SCIP notification number (Germany)	59d7a124-a9f8-48c5-b997-161fa3fa43a8
SCIP notification number (Hungary)	8682635c-6939-4c7e-bba2-638a1171044b
SCIP notification number (Italy)	6a3e1bf3-72af-4d1a-a294-a5e6d16cb2a5
SCIP notification number (Netherlands)	7590237b-ac77-4835-a844-d6ebe4ff2869
SCIP notification number (Poland)	59b02230-7773-4d71-aad8-7dc03ea62db6

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

SCIP notification number (Romania)

1daaba4f-fe96-4076-95a4-a2168f3eefd7

SCIP notification number (Sweden)

0791c229-1fde-4cbb-97a3-19ca5e4336ab

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL UL International Germany GmbH (ORDINARY LOCATIONS)	UL 508	E175199 Sec.5

Optional accessories

Cover

Cover		
	Item no.: 756-8102 M12 protective cap; for unused sockets	www.wago.com/756-8102

Marking accessories

Marking strip		
	Item no.: 757-011 Marker card; not stretchable; snap-on type	www.wago.com/757-011
Marking device		
	Item no.: 210-110 Fiber-tip pen	www.wago.com/210-110

Cables and pluggable connectors

Interconnecting cable		
	Item no.: 756-3203/190-050 Connecting cable; 19-pole; Length: 5 m	www.wago.com/756-3203/190-050
	Item no.: 756-3203/190-100 Connecting cable; 19-pole; Length: 10 m	www.wago.com/756-3203/190-100
	Item no.: 756-3203/190-150 Connecting cable; 19-pole; Length: 15 m	www.wago.com/756-3203/190-150
	Item no.: 756-3204/190-050 Connecting cable; 19-pole; Length: 5 m	www.wago.com/756-3204/190-050

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Item no.: 756-3204/190-150
Connecting cable; 19-pole; Length: 15 m

www.wago.com/756-3204/190-150



Item no.: 756-3204/190-100
Connecting cable; 19-pole; Length: 10 m

www.wago.com/756-3204/190-100

Mounting

Intermediate plate



Item no.: 757-080
Spacer module for sensor/actuator box; 8-way

www.wago.com/757-080

Downloads

Documentation

System Description

Sensor/Actuator Boxes – General Product Information	pdf 438.6 kB	Download
---	-----------------	----------

Additional Information

Disposal and Recycling	V 1.1.0 Aug 18, 2022	pdf 2.2 MB	Download
Electrical and electronic equipment, Batteries, Packaging			

CAD/CAE-Data

CAD data

2D/3D Models 757-185	URL	Download
----------------------	-----	----------

CAE data

EPLAN Data Portal 757-185	URL	Download
---------------------------	-----	----------

ZUKEN Portal 757-185	URL	Download
----------------------	-----	----------

WSCAD Universe 757-185	URL	Download
------------------------	-----	----------

Asset Administration Shell

Asset Administration Shell 757-185	URL	Download
------------------------------------	-----	----------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Environmental Product Compliance

Compliance Search

Environmental Product Compliance 757-185	URL	Download
M12 sensor/actuator box; 8-way; 5-pole; M23 connector		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.