
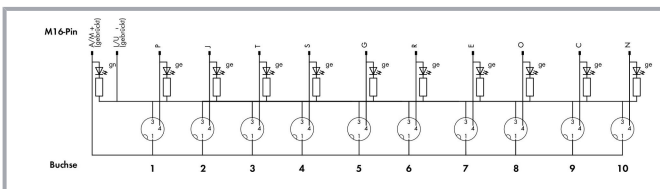


Data sheet | Item number: 757-303

M8 sensor/actuator box; 10-way; 3-pole; M16 connector


www.wago.com/757-303

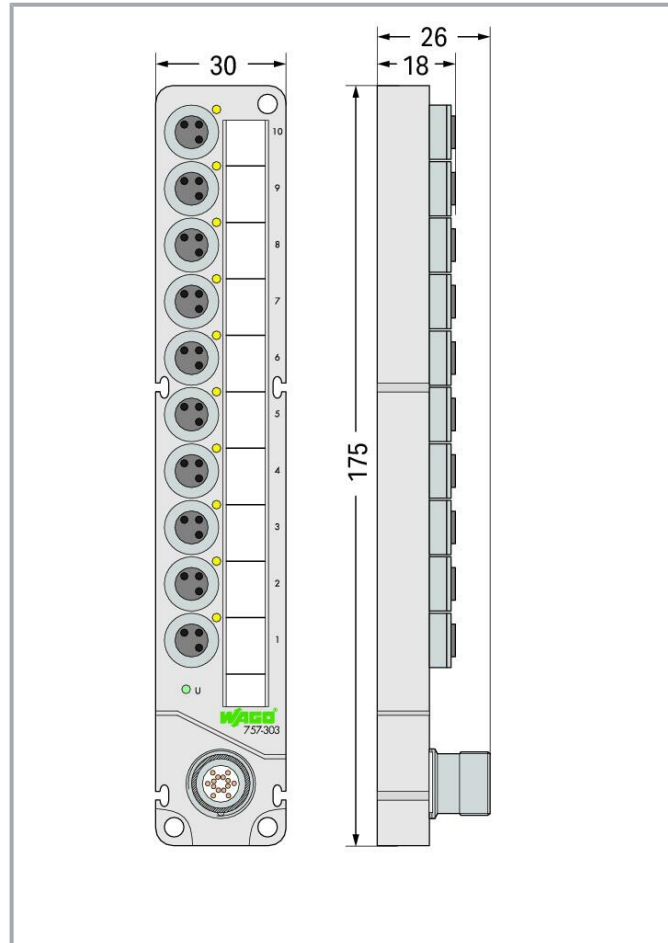

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

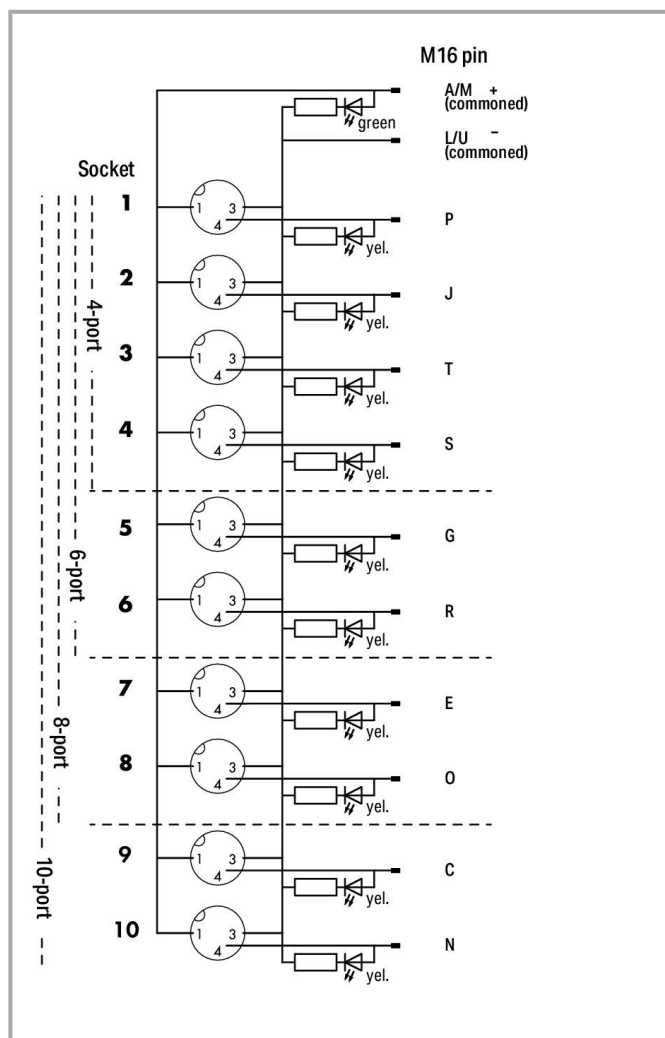

Item description

- M8 sensor/actuator box, 10-way
- 3-pole (1 signal per contact)
- M16 connector (14-pole)
- Green LED operating indicator
- Yellow LED status indicator
- incl. marking strips (WMB markers can also be used)
- incl. M8 protective caps (2 pcs)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Data

Technical data

Contact resistance (max.)	0.01 Ω
Supply voltage	10 ... 30 VDC; Rated voltage: 32 V ~ rms
Current carrying capacity (signal connections)	2 A
Current carrying capacity (supply connections)	6 A
Rated value of electrical isolation	500 V
Functionally separated potential groups	Kontakt/Kontakt
Insulation resistance	$>10^9 \Omega$
Signal characteristics	PNP
Indicators	LED yellow: Signal status (1 x per contact); LED (U) green: Sensor /actuator box status

Connection data

Connection technology: inputs/outputs	10 x M8 socket; 3-pole
Connection technology: trunk cable	1 x M16 plug; 14-pole

Physical data

Width	30 mm / 1.181 inches
Height	26 mm / 1.024 inches
Depth	175 mm / 6.89 inches

Mechanical data

Mounting type	Screw mounting
Weight	160 g

Material data

Housing material	PA 66 (UL 94 V0); RAL 7035; silicon and halogen free
Material properties of the connections	Contact: CuSn, nickel base-coat plating and 0.8 μ m gold-plated; Threaded bush: die-cast Zn, nickel-plated; Seal: Viton; 50 mating cycles
Encapsulation	Fully encapsulated with conformal coating (UL 94 V0)

Environmental requirements

Ambient temperature (operation)	-25 ... +80 °C
---------------------------------	----------------

Subject to changes. Please also observe the further product documentation!



Protection type	IP67
Note on protection type	per EN 60529 (NEMA 6 & 6P) in fully locked position with its plugs or protective caps
Pollution degree	3 per VDE 0110
Vibration resistance	per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27

Commercial data

Product Group	23 (I/O passive and accessories)
eCl@ss 10.0	27-44-01-11
eCl@ss 9.0	27-44-01-08
ETIM 9.0	EC003558
ETIM 8.0	EC003558
Recupel Type	
ECCN	NO DATA
PU (SPU)	1 pcs
Packaging type	box
Country of origin	DE
GTIN	4044918978705
Customs tariff number	85366990990

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL UL International Germany GmbH (ORDINARY LOCATIONS)	UL 508	E175199 Sec.5

Optional accessories

Mounting

Intermediate plate

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Item no.: 757-000

Spacer module for sensor/actuator box; 10-way

www.wago.com/757-000

Cover

Cover




Item no.: 756-8101

M8 protective cap; for unused sockets

www.wago.com/756-8101

Marking accessories

Marking strip



Item no.: 757-001

Marking strips; not stretchable; snap-on type

www.wago.com/757-001

Marking device



Item no.: 210-110

Fiber-tip pen

www.wago.com/210-110

Cables and pluggable connectors

Interconnecting cable



Item no.: 756-3206/140-050

M16 cable; M16 socket; angled; 14-pole; Length: 5 m

www.wago.com/756-3206/140-050

Item no.: 756-3205/140-150

M16 cable; M16 socket; straight; 14-pole; Length: 15 m

www.wago.com/756-3205/140-150

Item no.: 756-3206/140-100

M16 cable; M16 socket; angled; 14-pole; Length: 10 m

www.wago.com/756-3206/140-100

Item no.: 756-3206/140-150

M16 cable; M16 socket; angled; 14-pole; Length: 15 m

www.wago.com/756-3206/140-150

Item no.: 756-3205/140-100

M16 cable; M16 socket; straight; 14-pole; Length: 10 m

www.wago.com/756-3205/140-100

Item no.: 756-3205/140-050

M16 cable; M16 socket; straight; 14-pole; Length: 5 m

www.wago.com/756-3205/140-050

Downloads

Documentation

System Description

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



Sensor/Actuator Boxes – General Product Information

pdf
438.6 kB[Download](#)

Additional Information

Disposal and Recycling
Electrical and electronic equipment, Batteries, PackagingV 1.1.0
Aug 18, 2022pdf
2.2 MB[Download](#)

CAD/CAE-Data

CAE data

EPLAN Data Portal 757-303

URL

[Download](#)

WSCAD Universe 757-303

URL

[Download](#)

ZUKEN Portal 757-303

URL

[Download](#)

CAD data

2D/3D Models 757-303

URL

[Download](#)

Asset Administration Shell

Asset Administration Shell 757-303

URL

[Download](#)

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 757-303
M8 sensor/actuator box; 10-way; 3-pole; M16 connector

URL

[Download](#)

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.comDo you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.