




Data sheet | Item number: 757-383

M8 sensor/actuator box; 8-way; 3-pole; M16 connector

www.wago.com/757-383

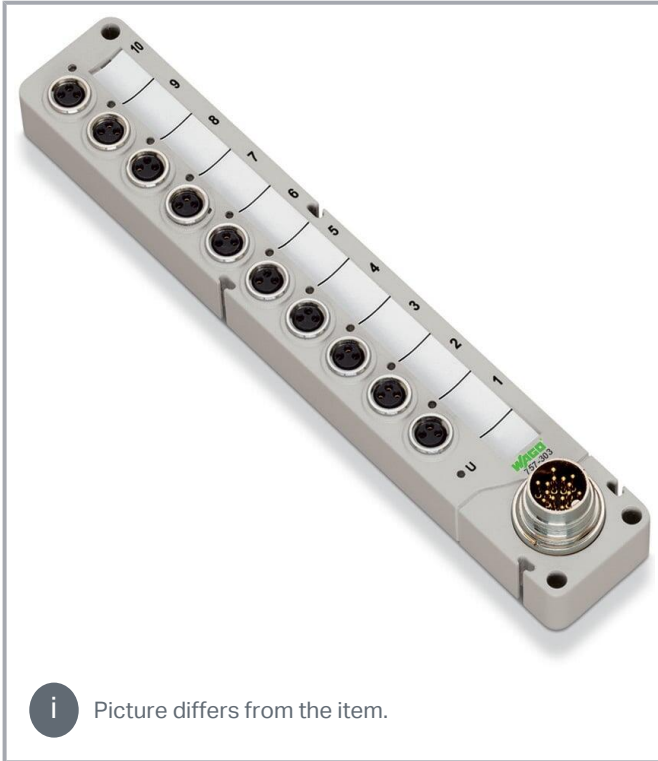

 Picture differs from the item.

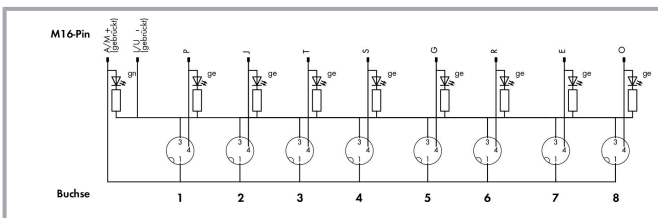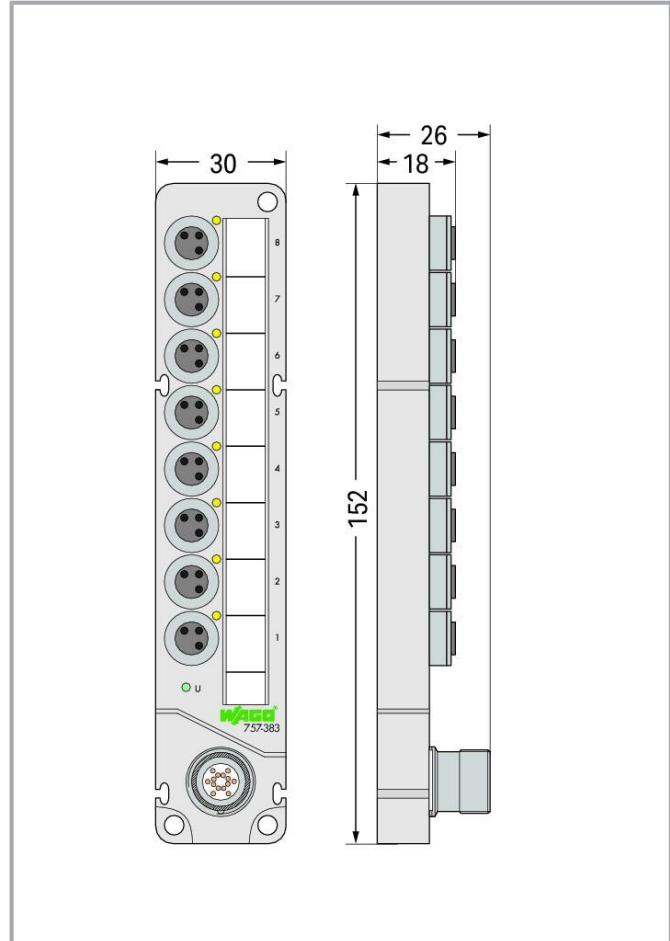

Item description

- M8 sensor/actuator box, 8-way
- 3-pole (1 signal per contact)
-

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



- M16 connector (14-pole)
- Green LED operating indicator
- Yellow LED status indicator
- incl. marking strips (WMB markers can also be used)
- incl. M8 protective caps (2 pcs)

Data

Technical data

Contact resistance (max.)	0.01 Ω
Supply voltage	10 ... 30 VDC; Rated voltage: 32 V ~ rms
Current carrying capacity (signal connections)	2 A
Current carrying capacity (supply connections)	6 A
Rated value of electrical isolation	500 V
Functionally separated potential groups	Kontakt/Kontakt
Insulation resistance	$>10^9 \Omega$
Signal characteristics	PNP
Indicators	LED yellow: Signal status (1 x per contact); LED (U) green: Sensor / actuator box status

Connection data

Connection technology: inputs/outputs	8 x M8 socket; 3-pole
Connection technology: trunk cable	1 x M16 plug; 14-pole

Physical data

Width	30 mm / 1.181 inches
Height	26 mm / 1.024 inches
Depth	152 mm / 5.984 inches

Mechanical data

Mounting type	Screw mounting
Weight	141 g

Material data

Housing material	PA 66 (UL 94 V0); RAL 7035; silicon and halogen free
Material properties of the connections	Contact: CuSn, nickel base-coat plating and 0.8 μ m gold-plated; Threaded bush: die-cast Zn, nickel-plated; Seal: Viton; 50 mating

Subject to changes. Please also observe the further product documentation!



cycles

Encapsulation	Fully encapsulated with conformal coating (UL 94 V0)
---------------	--

Environmental requirements

Ambient temperature (operation)	-25 ... +80 °C
Protection type	IP67
Note on protection type	per EN 60529 (NEMA 6 & 6P) in fully locked position with its plugs or protective caps
Pollution degree	3 per VDE 0110
Vibration resistance	per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27

Commercial data

Product Group	23 (I/O passive and accessories)
eCl@ss 10.0	27-44-01-11
eCl@ss 9.0	27-44-01-08
ETIM 9.0	EC003558
ETIM 8.0	EC003558
Recupel Type	
ECCN	NO DATA
PU (SPU)	1 pcs
Packaging type	box
Country of origin	DE
GTIN	4044918978699
Customs tariff number	85366990990

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant, With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	93f172a8-21e0-4301-9fb3-aaeb0cb95761
SCIP notification number (Belgium)	ea4425fe-333e-45eb-9ec6-9ded6a7223bc
SCIP notification number (Bulgaria)	c8eda647-26e9-47ee-bda2-e008ebbecc58
SCIP notification number (Czech Republic)	7a416f2a-cd42-4d1b-9c91-2716bc306cce
SCIP notification number (Denmark)	81a866d5-8c15-440a-8142-7f97d006e86b
SCIP notification number (Finland)	3016e444-3bd3-44f6-b840-d338eac13597

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

SCIP notification number (France)	879b8b3e-3171-4789-a4c6-7fa40158cea6
SCIP notification number (Germany)	7587f86a-5e83-4723-bf2d-f3d608d6a37b
SCIP notification number (Hungary)	04fbc13b-89c9-4e5c-a2d3-4e0154bcda7b
SCIP notification number (Italy)	41a4560e-9178-402f-a068-a0e2081cc653
SCIP notification number (Netherlands)	54b9903b-b1be-494b-9c1d-bfd9ff9d8368
SCIP notification number (Poland)	421b7591-98d0-44d9-bed5-4c02bc245622
SCIP notification number (Romania)	081173c6-d21e-4925-83f9-a46729116242
SCIP notification number (Sweden)	5a757ef5-ca24-4895-a883-0816184759de

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL UL International Germany GmbH (ORDINARY LOCATIONS)	UL 508	E175199 Sec.5

Optional accessories

Marking accessories

Marking strip

	Item no.: 757-081 Marking strips; cut to a defined length; not stretchable; plain; snap-on type	www.wago.com/757-081
--	--	--

Marking device

	Item no.: 210-110 Fiber-tip pen	www.wago.com/210-110
--	------------------------------------	--

Cables and pluggable connectors

Interconnecting cable

	Item no.: 756-3206/140-050 M16 cable; M16 socket; angled; 14-pole; Length: 5 m	www.wago.com/756-3206/140-050
--	---	--

	Item no.: 756-3205/140-150 M16 cable; M16 socket; straight; 14-pole; Length: 15 m	www.wago.com/756-3205/140-150
--	--	--

	Item no.: 756-3206/140-100 M16 cable; M16 socket; angled; 14-pole; Length: 10 m	www.wago.com/756-3206/140-100
--	--	--

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



	Item no.: 756-3206/140-150 M16 cable; M16 socket; angled; 14-pole; Length: 15 m	www.wago.com/756-3206/140-150
	Item no.: 756-3205/140-100 M16 cable; M16 socket; straight; 14-pole; Length: 10 m	www.wago.com/756-3205/140-100
	Item no.: 756-3205/140-050 M16 cable; M16 socket; straight; 14-pole; Length: 5 m	www.wago.com/756-3205/140-050

Mounting

Intermediate plate		
	Item no.: 757-080 Spacer module for sensor/actuator box; 8-way	www.wago.com/757-080

Cover

Cover		
	Item no.: 756-8101 M8 protective cap; for unused sockets	www.wago.com/756-8101

Downloads
Documentation

Additional Information

Disposal and Recycling	V 1.1.0	pdf	Download
Electrical and electronic equipment, Batteries, Packaging	Aug 18, 2022	2.2 MB	

System Description

Sensor/Actuator Boxes – General Product Information	pdf	Download
	438.6 kB	

CAD/CAE-Data

CAD data

2D/3D Models 757-383	URL	Download
----------------------	-----	----------

CAE data

EPLAN Data Portal 757-383	URL	Download
---------------------------	-----	----------

Subject to changes. Please also observe the further product documentation!



WSCAD Universe 757-383	URL	Download
ZUKEN Portal 757-383	URL	Download
Asset Administration Shell		
Asset Administration Shell 757-383	URL	Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 757-383	URL	Download
M8 sensor/actuator box; 8-way; 3-pole; M16 connector		

Installation Notes

Subject to changes. Please also observe the further product documentation!