


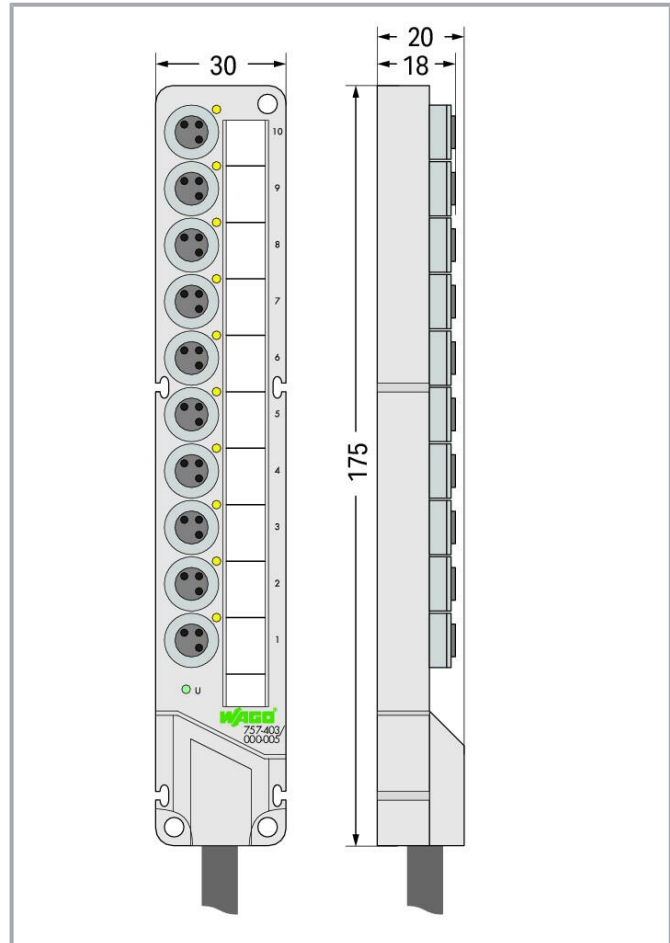

Aderfarbe	1	2	3	4	5	6	7	8	9	10
Braun	grün	weiß	grün	gelb	grün	rot	schwarz	schwarz	schwarz	schwarz
Buchse	1	2	3	4	5	6	7	8	9	10

Item description

- M8 sensor/actuator box, 10-way
- 3-pole (1 signal per contact)
- Cable length: 5 and 10 m

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



- Green LED operating indicator
- Yellow LED status indicator
- incl. marking strips (WMB markers can also be used)
- incl. M8 protective caps (2 pcs)

Data

Technical data

Contact resistance (max.)	0.01 Ω
Supply voltage	10 ... 30 VDC; Rated voltage: 32 V ~ rms
Current carrying capacity (signal connections)	2 A
Current carrying capacity (supply connections)	6 A
Rated value of electrical isolation	500 V
Functionally separated potential groups	Kontakt/Kontakt
Insulation resistance	$>10^9 \Omega$
Signal characteristics	PNP
Indicators	LED yellow: Signal status (1 x per contact); LED (U) green: Sensor /actuator box status

Connection data

Connection technology: inputs/outputs	10 x M8 socket; 3-pole
Connection technology: trunk cable	1 x Fixed connecting cable
Length of connection cable	10 m
Strip length	100 mm / 3.94 inches
Wire colors	white, green, yellow, gray, pink, red, black, purple, gray/pink, red /blue, brown, blue
Cable design	Wire cross-section: 0.34 mm ² ; Wire cross-section (2): 0.75 mm ²

Physical data

Width	30 mm / 1.181 inches
Height	20 mm / 0.787 inches
Depth	175 mm / 6.89 inches

Mechanical data

Mounting type	Screw mounting
Weight	943 g

Subject to changes. Please also observe the further product documentation!



Material data

Housing material	PA 66 (UL 94 V0); RAL 7035; silicon and halogen free
Halogen-free	Yes
Bending radius	10 x cable diameter (min.) for flexible application
Material properties of the connections	Contact: CuSn, nickel base-coat plating and 0.8 µm gold-plated; Threaded bush: die-cast Zn, nickel-plated; Seal: Viton; 50 mating cycles
Sheath material	PUR
Sheathed cable color	black
Encapsulation	Fully encapsulated with conformal coating (UL 94 V0)

Environmental requirements

Ambient temperature (operation)	-25 ... +80 °C
Ambient (operating) temperature (dynamic)	-5 ... +80 °C
Ambient (operating) temperature (static)	-40 ... +90 °C
Protection type	IP68
Note on protection type	72 h at a depth of 1 m under water per EN 60529 in the fully locked position with its plugs or protective caps
Pollution degree	3 per VDE 0110
Vibration resistance	per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27

Commercial data

eCl@ss 10.0	27-44-01-08
eCl@ss 9.0	27-44-01-08
ETIM 9.0	EC002585
ETIM 8.0	EC002585
Recupel Type	
ECCN	NO DATA
PU (SPU)	1 pcs
Packaging type	box
Country of origin	DE
GTIN	4044918978668
Customs tariff number	85366990990

Environmental Product Compliance

CAS-No.	7439-92-1
---------	-----------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant, With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	29a91708-04a2-48fa-8b42-5cee181edece
SCIP notification number (Belgium)	9293a776-bb3e-48c0-a198-bef57b717e37
SCIP notification number (Bulgaria)	6a2e8959-0a88-4f57-ae81-2a5491a4a900
SCIP notification number (Czech Republic)	fb73401f-05db-4a97-8a6c-cd5d4b178f9d
SCIP notification number (Denmark)	366d3f9a-728d-47b9-8549-3284fba77e0b
SCIP notification number (Finland)	cb7a0f7f-71d3-44f1-9d94-288dcf98c608
SCIP notification number (France)	90be1308-d0c7-4f2a-8d5e-dbd9ed12bf57
SCIP notification number (Germany)	2504945f-bb12-4bf3-be36-0c95980b7d83
SCIP notification number (Hungary)	e9ad6400-81e6-4711-a189-922bbb1175c9
SCIP notification number (Italy)	fa836ddd-f887-4d90-9172-2d50ad862565
SCIP notification number (Netherlands)	a21117f3-4f40-414c-b6c7-c1394de1e017
SCIP notification number (Poland)	4e4d9d98-fa08-47f8-a3e8-3fa8be7d5fd0
SCIP notification number (Romania)	26c32c46-82a6-4a0e-a964-be6563396014
SCIP notification number (Sweden)	78663162-d7ba-44e6-9e79-825b5fd6bb3d

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL UL International Germany GmbH (ORDINARY LOCATIONS)	UL 508	E175199 Sec.5

Optional accessories

Mounting

Intermediate plate	
	Item no.: 757-000 Spacer module for sensor/actuator box; 10-way
	www.wago.com/757-000

Marking accessories

Marking strip	
	Item no.: 757-001 Marking strips; not stretchable; snap-on type
	www.wago.com/757-001

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Marking device



Item no.: 210-110
Fiber-tip pen

www.wago.com/210-110

Cover

Cover



Item no.: 756-8101
M8 protective cap; for unused sockets

www.wago.com/756-8101

Downloads

Documentation

Additional Information

Disposal and Recycling	V 1.1.0	pdf	Download
Electrical and electronic equipment, Batteries, Packaging	Aug 18, 2022	2.2 MB	

System Description

Sensor/Actuator Boxes – General Product Information	pdf	Download
	438.6 kB	

CAD/CAE-Data

CAE data

EPLAN Data Portal 757-403/000-010	URL	Download
WSCAD Universe 757-403/000-010	URL	Download
ZUKEN Portal 757-403/000-010	URL	Download
WSCAD Universe 757-403/000-010	URL	Download
EPLAN Data Portal 757-403/000-010	URL	Download

CAD data

2D/3D Models 757-403/000-010	URL	Download
------------------------------	-----	----------

Asset Administration Shell

Asset Administration Shell 757-403/000-010	URL	Download
--	-----	----------

Subject to changes. Please also observe the further product documentation!



Environmental Product Compliance

Compliance Search

Environmental Product Compliance 757-403/000-010	URL	Download
M8 sensor/actuator box; 10-way; 3-pole; 10 m		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.