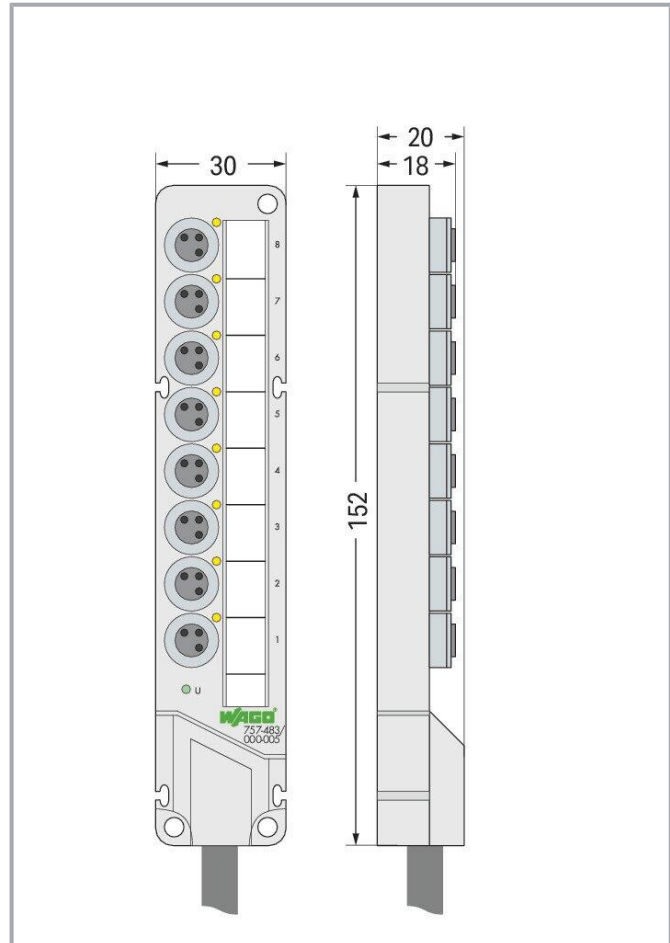
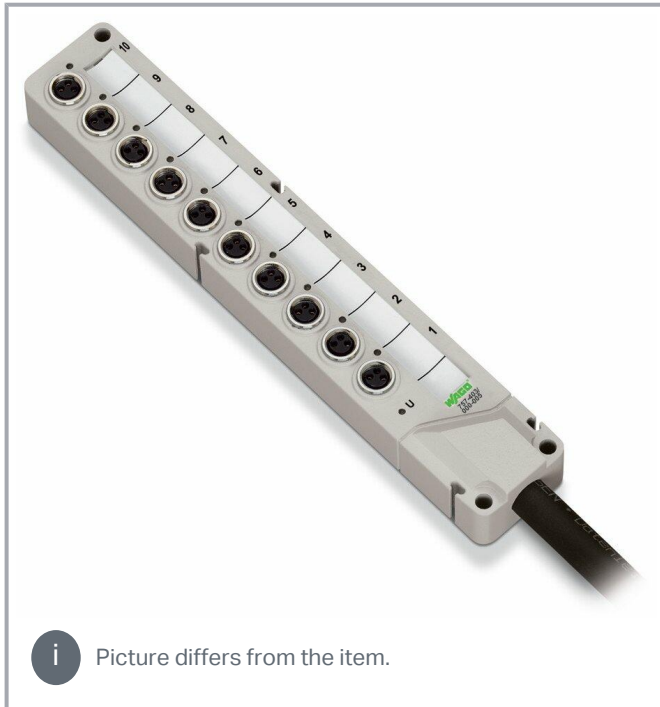


Item description

- M8 sensor/actuator box, 8-way
- 3-pole (1 signal per contact)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



- Cable length: 5 and 10 m
- Green LED operating indicator
- Yellow LED status indicator
- incl. marking strips (WMB markers can also be used)
- incl. M8 protective caps (2 pcs)

Data

Technical data

Contact resistance (max.)	0.01 Ω
Supply voltage	10 ... 30 VDC; Rated voltage: 32 V ~ rms
Current carrying capacity (signal connections)	2 A
Current carrying capacity (supply connections)	6 A
Rated value of electrical isolation	500 V
Functionally separated potential groups	Kontakt/Kontakt
Insulation resistance	$>10^9 \Omega$
Signal characteristics	PNP
Indicators	LED yellow: Signal status (1 x per contact); LED (U) green: Sensor /actuator box status

Connection data

Connection technology: inputs/outputs	8 x M8 socket; 3-pole
Connection technology: trunk cable	1 x Fixed connecting cable
Length of connection cable	5 m
Strip length	100 mm / 3.94 inches
Wire colors	white, green, yellow, gray, pink, red, black, purple, brown, blue
Cable design	Wire cross-section: 0.34 mm ² ; Wire cross-section (2): 0.75 mm ²

Physical data

Width	30 mm / 1.181 inches
Height	20 mm / 0.787 inches
Depth	152 mm / 5.984 inches

Mechanical data

Mounting type	Screw mounting
Weight	506 g

Subject to changes. Please also observe the further product documentation!



Material data

Housing material	PA 66 (UL 94 V0); RAL 7035; silicon and halogen free
Halogen-free	Yes
Bending radius	10 x cable diameter (min.) for flexible application
Material properties of the connections	Contact: CuSn, nickel base-coat plating and 0.8 µm gold-plated; Threaded bush: die-cast Zn, nickel-plated; Seal: Viton; 50 mating cycles
Sheath material	PUR
Sheathed cable color	black
Encapsulation	Fully encapsulated with conformal coating (UL 94 V0)

Environmental requirements

Ambient temperature (operation)	-25 ... +80 °C
Ambient (operating) temperature (dynamic)	-5 ... +80 °C
Ambient (operating) temperature (static)	-40 ... +90 °C
Protection type	IP68
Note on protection type	72 h at a depth of 1 m under water per EN 60529 in the fully locked position with its plugs or protective caps
Pollution degree	3 per VDE 0110
Vibration resistance	per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27

Commercial data

eCl@ss 10.0	27-44-01-08
eCl@ss 9.0	27-44-01-08
ETIM 9.0	EC002585
ETIM 8.0	EC002585
Recupel Type	
ECCN	NO DATA
PU (SPU)	1 pcs
Packaging type	box
Country of origin	DE
GTIN	4044918978637
Customs tariff number	85366990990

Environmental Product Compliance

CAS-No.	7439-92-1
---------	-----------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant, With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	51d71dcc-f643-4a97-bd61-b42427201f14
SCIP notification number (Belgium)	c6e931d9-ed60-4b5b-b64d-251c65ef49c9
SCIP notification number (Bulgaria)	d685f982-c246-4c03-b785-5318e96cf790
SCIP notification number (Czech Republic)	7538b0cc-e7be-4534-a0ef-39acadd8f543
SCIP notification number (Denmark)	9331f4eb-3196-4efc-87fa-10ff73389ede
SCIP notification number (Finland)	e1db2531-5b24-42d0-9829-b6991c587f0f
SCIP notification number (France)	4df7c908-43c0-428d-9fc3-464f02b5ee5e
SCIP notification number (Germany)	238f5ef7-b461-45ea-a8b1-5e9dd3dfdba3
SCIP notification number (Hungary)	5e3cbce7-4dba-4220-8f28-89e4eab2d416
SCIP notification number (Italy)	f2878a5f-9839-490a-8618-70fe57c4240a
SCIP notification number (Netherlands)	62d96c54-6ec4-47d3-943d-36feab03447c
SCIP notification number (Poland)	f5e92e05-f8ca-4071-874b-7ac3bc156b25
SCIP notification number (Romania)	cdbe813d-2ec5-4f3d-9ca6-8375a08c8582
SCIP notification number (Sweden)	13087529-a178-4521-b28f-633118177aee

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL UL International Germany GmbH (ORDINARY LOCATIONS)	UL 508	E175199 Sec.5

Optional accessories

Mounting

Intermediate plate



Item no.: 757-080

Spacer module for sensor/actuator box; 8-way

www.wago.com/757-080

Cover

Cover



Item no.: 756-8101

M8 protective cap; for unused sockets

www.wago.com/756-8101

Marking accessories

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



Marking strip



Item no.: 757-081

Marking strips; cut to a defined length; not stretchable; plain; snap-on type

www.wago.com/757-081

Marking device



Item no.: 210-110

Fiber-tip pen

www.wago.com/210-110

Downloads

Documentation

Additional Information

Disposal and Recycling	V 1.1.0	pdf	Download
Electrical and electronic equipment, Batteries, Packaging	Aug 18, 2022	2.2 MB	

System Description

Sensor/Actuator Boxes – General Product Information	pdf	Download
	438.6 kB	

CAD/CAE-Data

CAD data

2D/3D Models 757-483/000-005	URL	Download
------------------------------	-----	----------

CAE data

EPLAN Data Portal 757-483/000-005	URL	Download
-----------------------------------	-----	----------

WSCAD Universe 757-483/000-005	URL	Download
--------------------------------	-----	----------

ZUKEN Portal 757-483/000-005	URL	Download
------------------------------	-----	----------

WSCAD Universe 757-483/000-005	URL	Download
--------------------------------	-----	----------

EPLAN Data Portal 757-483/000-005	URL	Download
-----------------------------------	-----	----------

Asset Administration Shell

Asset Administration Shell 757-483/000-005	URL	Download
--	-----	----------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



Environmental Product Compliance

Compliance Search

Environmental Product Compliance 757-483/000-005	URL	Download
M8 sensor/actuator box; 8-way; 3-pole; 5 m		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.