

FEATURES

- SMT Technology
- High Power Density
- Efficiency up to 83%
- 1500VDC I/O Isolation
- Short Circuit Protection
- Remote ON/OFF Control
- MTBF > 1,000,000 Hours
- 4:1 Ultra Wide Input Voltage Range
- EMI Complies with EN55022 Class A
- Operating Temperature: -40°C to +71°C

DESCRIPTION

The MSKUW series of DC/DC converters provide a maximum of 5 watts in a "gull-wing" SMT package. These converters operate over 4:1 ultra wide input voltage ranges of 9-36 or 18-75VDC. This series also has single output voltages of 3.3, 5, 12, and 15VDC and dual output voltages of ± 5 , ± 12 , and ± 15 VDC. These converters have a typical full load efficiency of 83%, remote ON/OFF control, and continuous short circuit protection. The -40°C~+71°C operating temperature make these converters ideal for data communication equipment, mobile battery driven equipment, process/machine control equipment, telecommunication equipment, computer peripheral systems, distributed power systems, mixed analog/digital subsystems, and industrial robot systems. The EN55022 Class A conducted noise compliance minimizes design time, cost, and eliminates the need for external filter components.



SPECIFICATIONS: MSKUW Series

All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.
We reserve the right to change specifications based on technological advances.

SPECIFICATION	TEST CONDITIONS	Min	Nom	Max	Unit
INPUT (V _{in})					
Input Voltage Range	24V nominal input models 48V nominal input models	9 18	24 48	36 75	VDC
Start Voltage	24V nominal input models 48V nominal input models	7 14	8 16	9 18	VDC
Under Voltage Shutdown	24V nominal input models 48V nominal input models	6 13	7 15	8 17	VDC
Input Surge Voltage (1000ms)	24V nominal input models 48V nominal input models	-0.7 -0.7		50 100	VDC
Reverse Polarity Input Current				1	A
Input Filter		Pi Filter			
Reflected Ripple Current		See Rating Chart			
Short Circuit Input Power			1000	3000	mW
OUTPUT (V _o)					
Output Voltage		See Rating Chart			
Output Voltage Accuracy			±0.5	±2.0	%
Output Voltage Balance	Dual Output, Balanced Loads		±0.5	±3.0	%
Load Regulation	I _o = 10% to 100%		±0.3	±1.0	%
Line Regulation	V _{in} = min. to max.		±0.2	±1.0	%
Output Power				5	W
Output Current		See Rating Chart			
Ripple & Noise (20MHz)			50	85	mV _{pk-pk}
Ripple & Noise (20MHz)	Over Line, Over Load, and Over Temperature			100	mV _{pk-pk}
Ripple & Noise (20MHz)				15	mV _{rms}
Transient Response Deviation	25% Load Step Change		±2	±6	%
Transient Recovery Time	25% Load Step Change		250	500	µs
REMOTE ON/OFF CONTROL					
Supply On		2.5 to 5.5VDC or open circuit			
Supply Off		-0.7		0.8	VDC
Device Standby Input Current				10	mA
Control Input Current (ON)	V _{in} = min to max			-600	µA
Control Input Current (OFF)	V _{in} = min to max			-700	µA
Control Common		Referenced to negative input			
PROTECTION					
Short Circuit Protection		continuous			
Over Power Protection		115			%
Input Fuse Recommendation	24V nominal input models 48V nominal input models	1500mA slow-blow type 750mA slow-blow type			
GENERAL					
Efficiency		See Rating Chart			
Switching Frequency			340		KHz
Isolation Voltage Rated	60 seconds	1500			VDC
Isolation Voltage Test	Flash Test for 1 second	1650			VDC
Isolation Resistance	500VDC	1000			MΩ
Isolation Capacitance	100KHz, 1V		650	750	pF
Internal Power Dissipation				2500	mW
Max. Capacitive Load		See Rating Chart			
ENVIRONMENTAL					
Operating Temperature (Ambient)		-40		+71	°C
Operating Temperature (Case)		-40		+90	°C
Storage Temperature		-40		+125	°C
Lead Temperature	1.5mm from case for 10 seconds			260	°C
Humidity				95	%
Cooling		Free air convection			
Temperature Coefficient			±0.01	±0.02	%/°C
MTBF	MIL-HDBK-217F @ 25°C, Ground Benign	1000			Khours
Conducted EMI		EN55022 Class A			
PHYSICAL					
Weight		14 grams			
Dimensions (L x W x H)		1.31x0.81x0.40 in (33.4x20.6x10.2 mm)			
Case Material		Non-conductive black plastic			

OUTPUT VOLTAGE / CURRENT RATING CHARTS

SINGLE OUTPUT MODELS									
Model Number	Input Voltage	Output Voltage	Output Current		Input Current		Reflected Ripple Current	Efficiency (Typ)	Maximum Capacitive Load
			Min	Max	No Load	Max Load			
MSKW24S33UW4	24 VDC (9 ~ 36 VDC)	3.3 VDC	120mA	1200mA	20mA	217mA	15mA	76%	2000 μ F
MSKW24S5UW5		5 VDC	100mA	1000mA		260mA		80%	2000 μ F
MSKW24S12UW5		12 VDC	41.7mA	417mA		251mA		83%	470 μ F
MSKW24S15UW5		15 VDC	33.3mA	333mA		251mA		83%	330 μ F
MSKW48S33UW4	48 VDC (18 ~ 75 VDC)	3.3 VDC	120mA	1200mA	10mA	109mA	10mA	76%	2000 μ F
MSKW48S5UW5		5 VDC	100mA	1000mA		130mA		80%	2000 μ F
MSKW48S12UW5		12 VDC	41.7mA	417mA		126mA		83%	470 μ F
MSKW48S15UW5		15 VDC	33.3mA	333mA		125mA		83%	330 μ F

DUAL OUTPUT MODELS									
Model Number	Input Voltage	Output Voltage	Output Current		Input Current		Reflected Ripple Current	Efficiency (Typ)	Maximum Capacitive Load
			Min	Max	No Load	Max Load			
MSKW24D5UW5	24 VDC (9 ~ 36 VDC)	$\pm$ 5 VDC	$\pm$ 50mA	$\pm$ 500mA	20mA	260mA	15mA	80%	680 μ F
MSKW24D12UW5		$\pm$ 12 VDC	$\pm$ 20.8mA	$\pm$ 208mA		251mA		83%	330 μ F
MSKW24D15UW5		$\pm$ 15 VDC	$\pm$ 16.7mA	$\pm$ 167mA		252mA		83%	220 μ F
MSKW48D5UW5	48 VDC (18 ~ 75 VDC)	$\pm$ 5 VDC	$\pm$ 50mA	$\pm$ 500mA	10mA	130mA	10mA	80%	680 μ F
MSKW48D12UW5		$\pm$ 12 VDC	$\pm$ 20.8mA	$\pm$ 208mA		125mA		83%	330 μ F
MSKW48D15UW5		$\pm$ 15 VDC	$\pm$ 16.7mA	$\pm$ 167mA		126mA		83%	220 μ F


NOTES

1. Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
2. The MSKUW series requires a minimum output loading to maintain specified regulations. Operation under no-load conditions will not damage these devices, however they may not meet all listed specifications.
3. All DC/DC converters should be externally fused at the front end for protection.
4. Other input and output voltages may be available, please contact factory.
5. It is not recommended to use the water-washing process on SMT units.


**Due to advances in technology, specifications subject to change without notice.*

BLOCK DIAGRAMS


Single Output

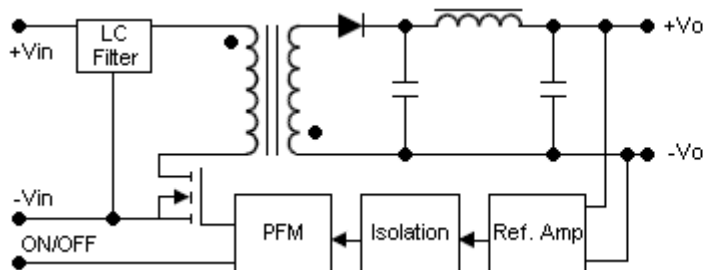


Dual Output

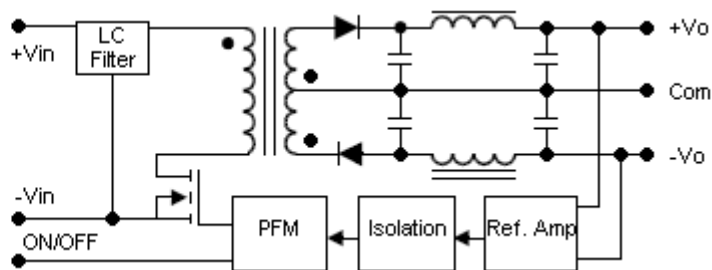


INPUT VOLTAGE TRANSIENT RATING

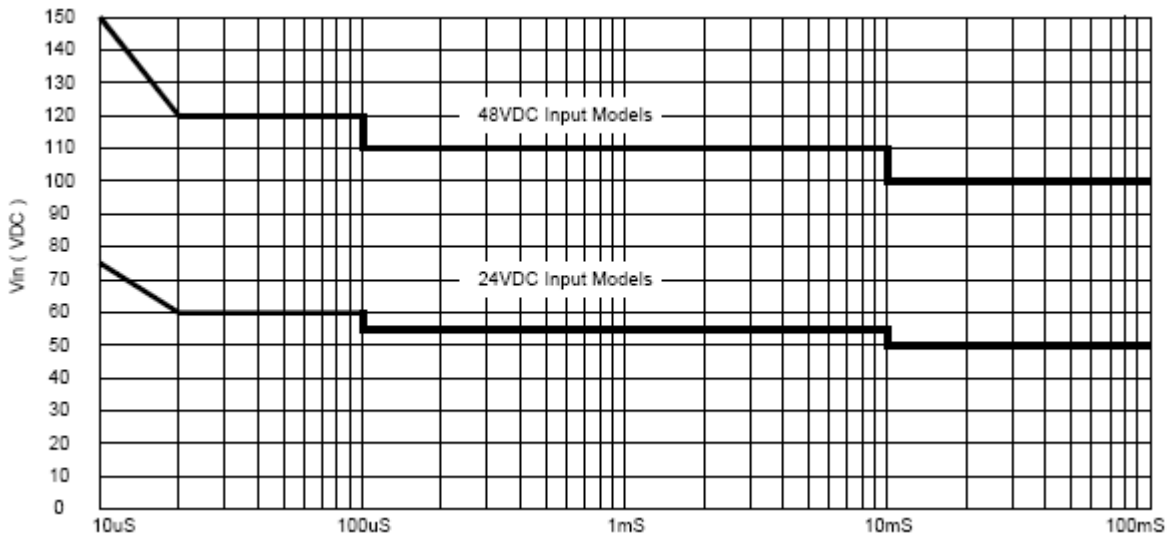


DERATING CURVE

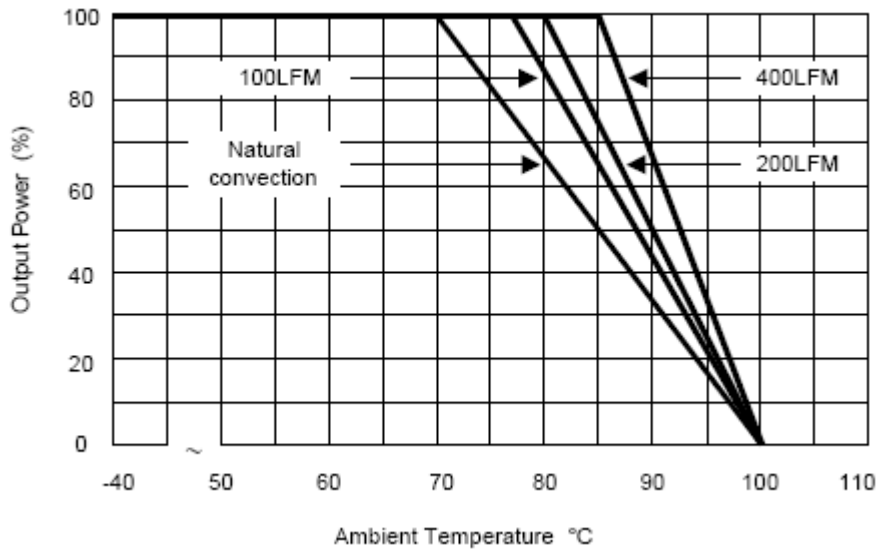


Efficiency vs Input Voltage (Single Output)

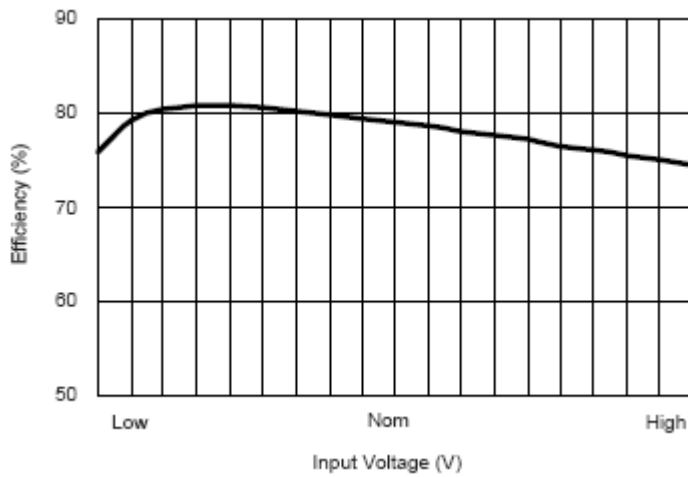


Efficiency vs Input Voltage (Dual Output)

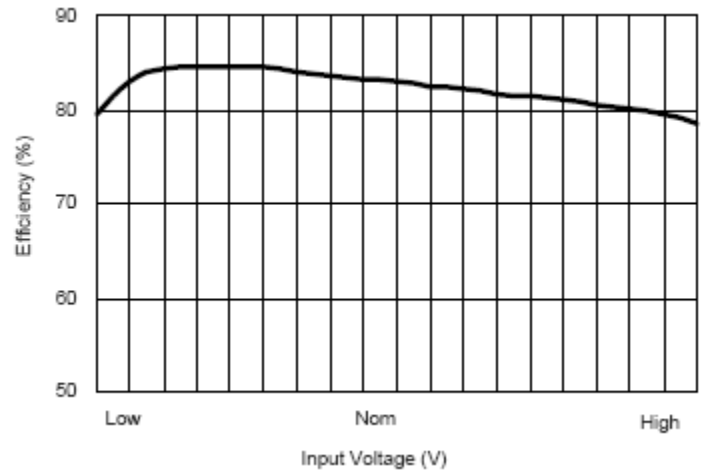

Efficiency vs Output Load (Single Output)

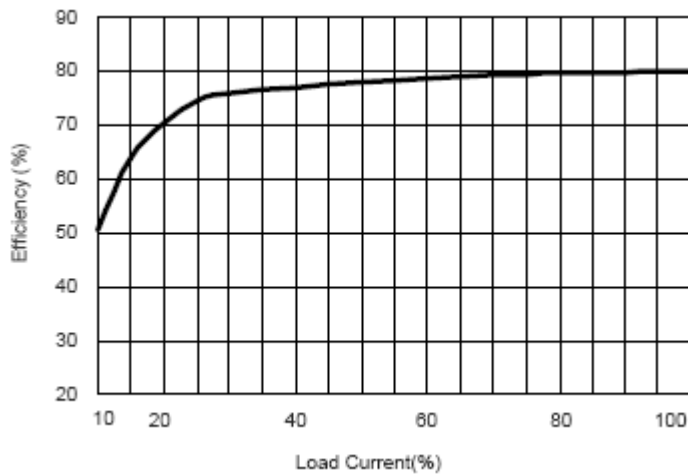


Efficiency vs Output Load (Dual Output)

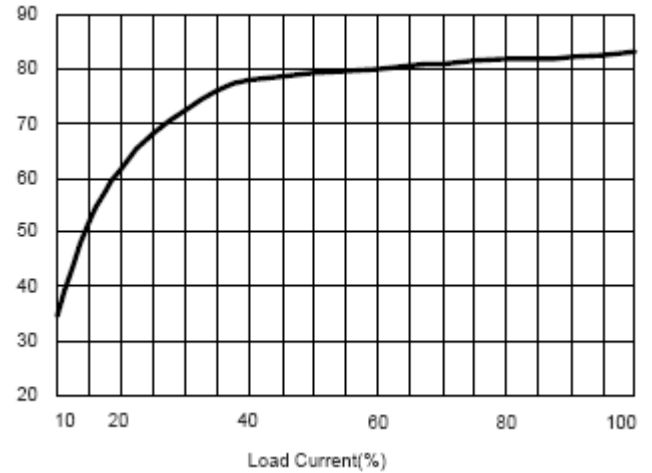

MECHANICAL DRAWING


Unit: mm [inches]

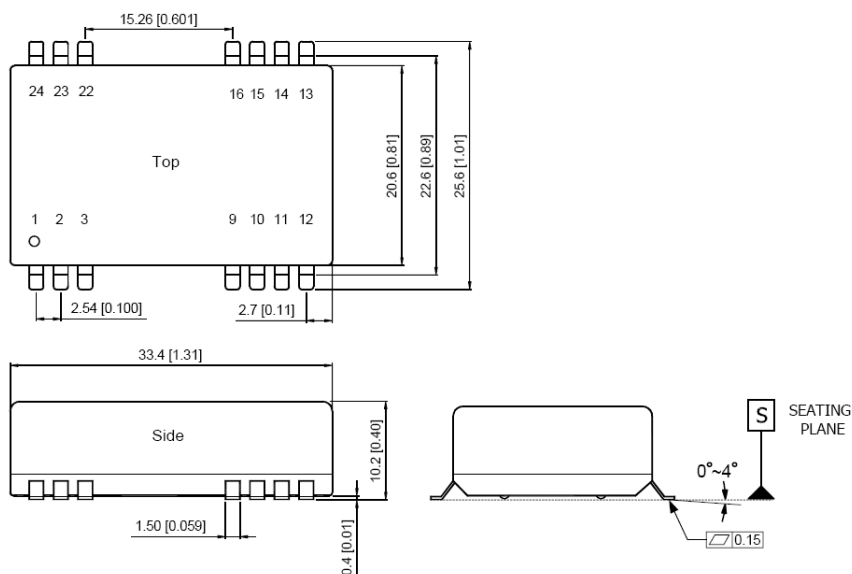

1. Tolerance: X.X±0.25 [X.XX±0.01]
X.XX±0.13 [X.XXX±0.005]
2. Pin: ±0.05 [±0.002]

CONNECTING PIN PATTERNS

Top View (2.54mm / 0.1 inch grids)

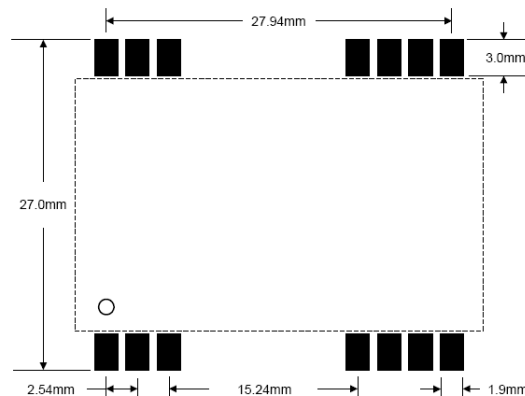

PIN CONNECTIONS		
PIN	Single Output	Dual Output
1	Remote On/Off	Remote On/Off
2	-Vin	-Vin
3	-Vin	-Vin
9	NC	Common
10	NC	NC
11	NC	-Vout
12	NC	NC
13	NC	NC
14	+Vout	+Vout
15	NC	NC
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin
24	NC	NC

NC: No Connection

DESIGN & FEATURE CONSIDERATIONS

Over Current Protection

To provide protection in a fault (output over load) condition the unit is equipped with internal current limiting circuitry and can endure current limiting for an unlimited duration. At the point of current limit inception the unit shifts from voltage control to current control. The unit operates normally once the output current is brought back to its specified range.

Input Source / Remote On/Off

Positive logic remote on/off turns the module ON during a logic high voltage on the remote on/off pin, and turns the module OFF during a logic low voltage on the remote on/off pin. To turn the power module ON and OFF, the user must supply a switch to control the voltage between the on/off terminal and the -Vin terminal. The switch can be an open collector or equivalent.


A logic low is $-0.7V$ to $0.8V$.

A logic high is $2.5V$ to $5.5V$.

The maximum sink current of the switch at the on/off terminal during a logic low is $300\mu A$. The maximum sink current of the switch at the on/off terminal = 2.5 to $5.5V$ is $200\mu A$ or open.

Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. A capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance ($ESR < 1.0\Omega$ at $100KHz$) capacitor of $3.3\mu F$ for the $12V$ input models and a $2.2\mu F$ for the $24V$ and $48V$ input models.

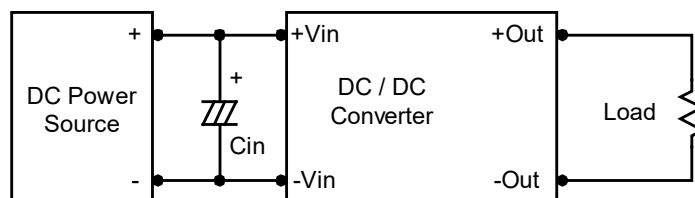


Maximum Capacitive Load

The MSKUW series has a limit of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the Output Voltage / Current Rating Chart.

TEST CONFIGURATIONS

Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor L_{in} ($4.7\mu H$) and C_{in} ($220\mu F$, $ESR < 1.0\Omega$ at $100KHz$) to simulate source impedance.

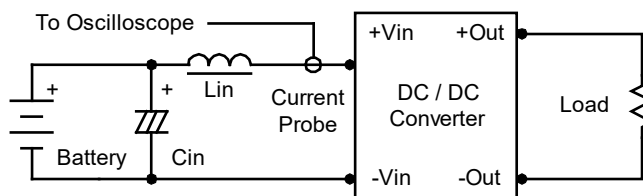


Capacitor C_{in} offsets possible battery impedance.

Current ripple is measured at the input terminals of the module. Measurement bandwidth is $0 \sim 500KHz$.

Peak-to-Peak Output Noise Measurement Test


Use a Cout 0.47 μ F ceramic capacitor.

Scope measurement should be made by using a BNC socket; measurement bandwidth is 0 ~ 20MHz. Position the load between 50mm and 75mm from the DC/DC Converter.

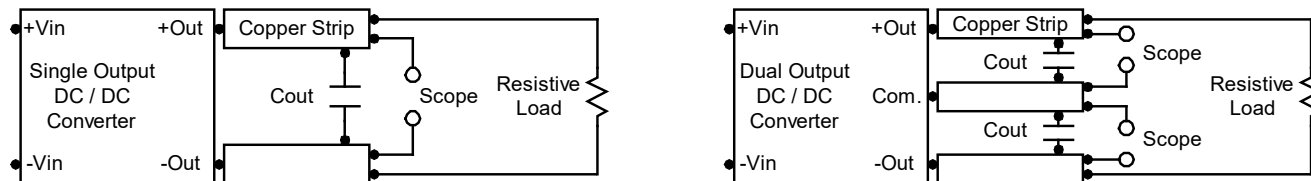


Output Ripple Reduction

A good quality low ESR capacitor placed as close as possible across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3 μ F capacitors at the output.

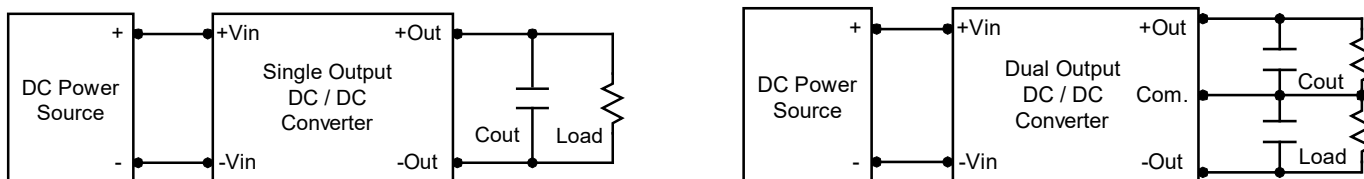

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module, and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 90°C. The derating curves are determined from measurements obtained in an experimental apparatus.

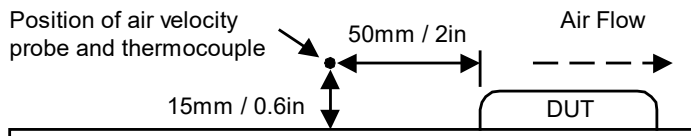

COMPANY INFORMATION:

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001: 2015 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎(603)778-2300
Toll Free: ☎(888)597-9255
Fax: ☎(603)778-9797
E-mail: sales@wallindustries.com
Web: www.wallindustries.com
Address: 37 Industrial Drive
Exeter, NH 03833

©2019 Wall Industries, Inc. Specifications subject to change without notice. Wall Industries is not responsible for typographical errors. The information contained herein is for informational purposes only. This information is provided by Wall Industries and we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability with respect to the information contained in this document for any purpose. All product and manufacturer names are trademarks or registered trademarks of their respective companies.