

## Wall Industries, Inc.

### PSHF25W SERIES

85~264VAC (120~370VDC) Input Voltage Range  
25 Watts Output Power  
3.3, 5, 12, 15, 24, & 48VDC Single Outputs  
AC/DC Switching Power Supplies



#### FEATURES

- RoHS Compliant
- $\pm 10\%$  Voltage Adjustment Range
- Free Air Convection
- 85~264VAC (120~370VDC) Input Voltage Range
- High Reliability
- Single Outputs
- 3.88" x 3.23" x 1.38" Enclosed Case
- 25W Output Power
- 100% Full Load Burn-in Tested
- Short Circuit, Over Load, Over Voltage Protection
- UL60950, GB4943, and EN60950 Safety Approvals

#### DESCRIPTION

The PSHF25W series of AC/DC power supplies offers 25W of output power in a 3.88" x 3.23" x 1.38" enclosed case. This series consists of 3.3, 5, 12, 15, 24, and 48VDC single output models with a universal input voltage range of 85~264VAC (120~370VDC). These supplies have a  $\pm 10\%$  output adjustment range and are protected against short circuit, over load, and over voltage conditions. This series is RoHS compliant and has UL60950, GB4943, and EN60950 safety approvals.

## SPECIFICATIONS: PSHF25W Series

All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.  
We reserve the right to change specifications based on technological advances.

SPECIFICATION	TEST CONDITIONS		Min	Nom	Max	Unit
INPUT SPECIFICATIONS						
Input Voltage Range	AC input voltage range		85		264	VAC
	DC input voltage range		120		370	VDC
Inrush Current	At 115VAC	Cold start		20		A
	At 230VAC			40		
Input Frequency			47		63	Hz
OUTPUT SPECIFICATIONS						
Output Voltage			See Table			
Output Voltage Adjustment Range			-10		+10	%
Line Regulation	Full load		-0.5		+0.5	%
Load Regulation				0.5		%
Output Current			See Table			
Output Power			See Table			
Ripple & Noise			See Table			
Rise Time	Full load			50		ms
Hold-up Time	Full load			20		ms
PROTECTION						
Over Load Protection			110		150	%
Over Voltage Protection			115		150	%
Short Circuit Protection			Yes			
GENERAL SPECIFICATIONS						
Efficiency			See Table			
Withstand Voltage	Input to Output	All for 1 minute	3000			VAC
	Input to FG		1500			
	Output to FG		500			
Leakage Current	At 230VAC				0.7	mA
ENVIRONMENTAL SPECIFICATIONS						
Operating Temperature			-10		+50	°C
Operating Humidity	non-condensing		20		93	% RH
Storage Temperature			-20		+85	°C
Storage Humidity	non-condensing		20		95	% RH
Cooling Method			Free air convection			
PHYSICAL SPECIFICATIONS						
Weight			8.5oz (240g)			
Dimensions (L x W x H)			3.88 x 3.23 x 1.38 inches (98.5 x 82 x 35 mm)			
SAFETY & EMC CHARACTERISTICS						
Safety Standards	UL60950 <sup>(1)</sup> , EN60950, GB4943					
EMC Standards	GB9254, EN55022 Class B, EN55024, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11					

## NOTES



1. This product is Listed to applicable standards and requirements by UL.

*\*Due to advances in technology, specifications subject to change without notice.*

MODEL SELECTION TABLE						
Model Number	Input Voltage Range	Output Voltage	Output Current	Ripple & Noise	Output Power	Efficiency
PSHF25W-SL-3.3	85 ~ 264 VAC or 120 ~ 370 VDC	3.3 VDC	6A	80mVp-p	20W	67%
PSHF25W-SL-5		5 VDC	5A	80mVp-p	25W	72%
PSHF25W-SL-12		12 VDC	2.1A	100mVp-p	25.2W	78%
PSHF25W-SL-15		15 VDC	1.7A	100mVp-p	25.5W	78%
PSHF25W-SL-24		24 VDC	1.1A	150mVp-p	26.4W	80%
PSHF25W-SL-48		48 VDC	0.57A	150mVp-p	27.4W	82%

## MECHANICAL DRAWING

Unit: inches (mm)

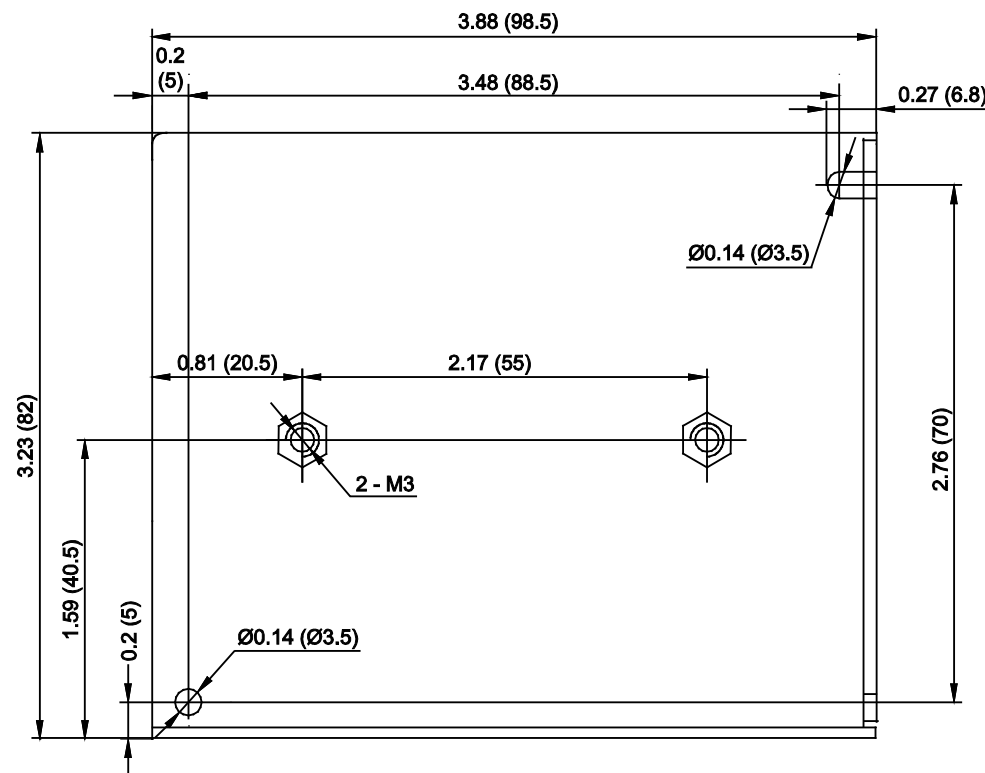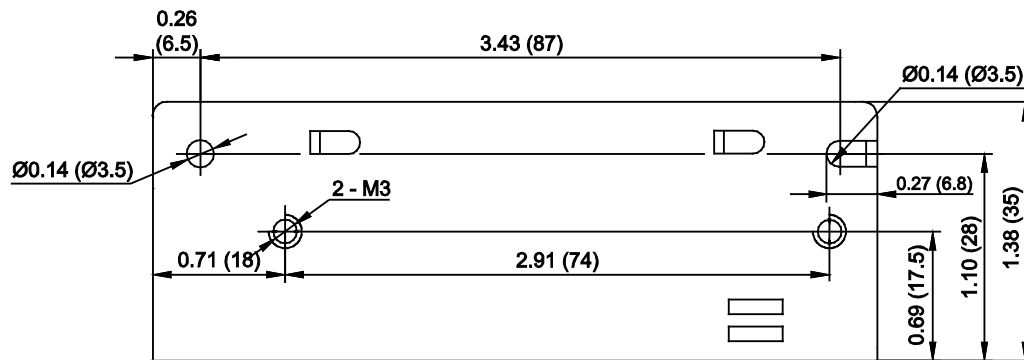

## COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001: 2015 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎(603)778-2300  
Toll Free: ☎(888)597-9255  
Fax: ☎(603)778-9797  
E-mail: [sales@wallindustries.com](mailto:sales@wallindustries.com)  
Web: [www.wallindustries.com](http://www.wallindustries.com)  
Address: 37 Industrial Drive  
Exeter, NH 03833

©2019 Wall Industries, Inc. Specifications subject to change without notice. Wall Industries is not responsible for typographical errors. The information contained herein is for informational purposes only. This information is provided by Wall Industries and we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability with respect to the information contained in this document for any purpose. All product and manufacturer names are trademarks or registered trademarks of their respective companies.