

**SAIL-M12BG-12-30U****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

Sensor/actuator cables are used for wiring sensors and actuators and for transmitting data or power in various applications. The moulded cable offers connected and tested connection of the plug-in connector to the cable ex-works. The cables may be exposed to a wide range of conditions, such as humidity, dust, heat, cold, shock or vibration.

Our developers have focused specifically on this issue and designed a host of different M8 and M12 sensor-actuator cables so you are bound to find the solution you need for your application.

Is there something you have not managed to find or you feel needs explanation? Talk to us!

**General ordering data**

|            |   |
|------------|---|
| Version    | Sensor/actuator line, One end without connector, M12, Number of poles : 12, 30 m, Female socket, straight, Shielded: No, LED: No, Sheath material: PUR, Halogen: No |
| Order No.  | <a href="#">1879713000</a>  |
| Type       | SAIL-M12BG-12-30U   |
| GTIN (EAN) | 4050118256604   |
| Qty.       | 1 pc(s).  |

Creation date September 16, 2022 8:36:43 PM CEST

Catalogue status 09.09.2022 / We reserve the right to make technical changes.

**SAIL-M12BG-12-30U****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

|            |         |
|------------|---------|
| Net weight | 1,101 g |
|------------|---------|

**Environmental Product Compliance**

|            |                |      |                                      |
|------------|----------------|------|--------------------------------------|
| REACH SVHC | Lead 7439-92-1 | SCIP | ebf89fc8-a87f-4691-b87a-dfb9921774b4 |
|------------|----------------|------|--------------------------------------|

**Technical specifications for cable**

|                                      |                       |  |  |
|--------------------------------------|-----------------------|--|--|
| Acceleration                         | 5 m/s <sup>2</sup>    | Bending cycles                                 | 1 mill.  |
| Bending radius, min., moving         | 10 x cable diameter   | Bending radius, min., stationary               | 5 x cable diameter   |
| Cable length                         |                       | Colour coding                                  | yellow, pink, grey / pink, green, white, blue, violet, brown, red, grey, red / blue, black |
|                                      | 30 m                  |  |  |
| Configurable cable length            | No                    | Core cross-section                             | 0.14 mm <sup>2</sup>   |
| Core in accordance with UL AWM style | 10493 (80 °C / 300 V) | Halogen  | No   |
| Insulation                           | PP                    | Irradiation crosslinked                        | No   |
| Number of poles                      |                       | Outer cladding in accordance with UL AWM style | 20549 (80 °C / 300 V)  |
|                                      | 12                    | Resistant to welding beads                     | No   |
| Outside diameter                     | 5.6 mm ± 0.2 mm       | Sheathing colour                               | black  |
| Sheath material                      | PUR                   | Speed  | 5 m/s  |
| Shielded                             | No                    | Temperature range, moving                      | -25...80 °C  |
| Suitable for cable carriers          | Yes                   | Torsion resistance                             | 180 °/m  |
| Temperature range, stationary        | -40...80 °C           |  |  |
| Welding spark resistance             | No                    |  |  |

**General technical data**

|                        |                                   |                              |                   |
|------------------------|-----------------------------------|------------------------------|-------------------|
| Coding                 | A                                 | Connection thread            | M12               |
| Contact surface        | Gold-plated                       | Housing main material        | PUR               |
| Insulation strength    | 10 <sup>8</sup> Ω                 | LED                          | No                |
| Plugging cycles        | ≥ 100                             | Pollution severity           | 3                 |
| Protection degree      | IP67, when screwed in, IP65, IP66 | Rated current                | 1.5 A             |
| Rated voltage          | 30 V                              | Temperature range of housing | -40 ... +85 °C    |
| Threaded ring material | Brass, nickel-plated              | Tightening torque            | M12: 0.8 - 1.2 Nm |
| Version                | Female socket, straight           | jumpered                     | No                |

**Electrical properties**

|                     |                   |               |                                |
|---------------------|-------------------|---------------|--------------------------------|
| Insulation strength | 10 <sup>8</sup> Ω | Rated current | 2 A (8-pole) / 1.5 A (12-pole) |
| Rated voltage       | 30 V              |               |                                |

**General standards**

|                         |         |                    |                 |
|-------------------------|---------|--------------------|-----------------|
| Certificate no. (cULus) | E307231 | Connector standard | IEC 61076-2-101 |
|-------------------------|---------|--------------------|-----------------|

**Standards**

|                    |                 |
|--------------------|-----------------|
| Connector standard | IEC 61076-2-101 |
|--------------------|-----------------|

**SAIL-M12BG-12-30U****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Technical data****Classifications**

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001855    | ETIM 7.0    | EC001855    |
| ETIM 8.0    | EC001855    | ECLASS 9.0  | 27-06-03-11 |
| ECLASS 9.1  | 27-06-03-11 | ECLASS 10.0 | 27-06-03-11 |
| ECLASS 11.0 | 27-06-03-11 | ECLASS 12.0 | 27-06-03-11 |

**Approvals**

Approvals



|                         |            |
|-------------------------|------------|
| ROHS                    | Conform    |
| UL File Number Search   | UL Website |
| Certificate no. (cULus) | E307231    |

**Downloads**

|                  |  |
|------------------|--|
| Engineering Data | <a href="#">CAD data – STEP</a>          |
| Catalogues       | <a href="#">Catalogues in PDF-format</a> |
| Brochures        | <a href="#">FL FIELDWIRING EN</a>        |


## SAIL-M12BG-12-30U

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany


[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

### Dimensioned drawing



### Pole scheme

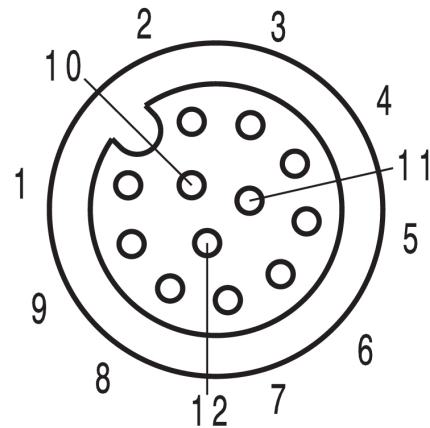

Socket

### Wiring diagram



### The ideal tool: Screwty<sup>®</sup> with torque function



Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F