

POS-4P M12 PG13,5 150MM**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Various build-in connectors are required for the connections on the device side of the sensor/actuator cabling. These are available in the versions M12, M8 and M5.

General ordering data

Version	Locating plug-in connector, M12, pin, straight, Number of poles: 4
Order No.	9455650000
Type	POS-4P M12 PG13,5 150MM
GTIN (EAN)	4008190076467
Qty.	1 pc(s).

POS-4P M12 PG13,5 150MM
Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com
Technical data
Dimensions and weights

Net weight 66 g

Environmental Product Compliance

REACH SVHC Lead 7439-92-1 SCIP ebf89fc8-a87f-4691-b87a-dfb9921774b4

Technical data customisable plug-in connectors

Cable glands	PG 13.5	Coding	A
Contact surface	Gold-plated	Housing main material	CuZn, nickel-plated
Number of poles	4	Protection degree	IP67
Rated current	4 A	Rated voltage	250 V
Temperature range of housing	-40 ... +85 °C		

General data

Cable glands	PG 13.5	Cable length	0.15 m
Coding	A	Conductor O.D.	-
Connection thread	M12	Contact surface	Gold-plated
Core cross-section	1.5 mm ²	Fire behaviour	V2
Housing main material	CuZn, nickel-plated	Material	Cu Zn
Number of poles	4	Protection degree	IP67
Rated current	4 A	Rated voltage	250 V
Sheath material	Nickel-plated CuZn	Sheathing colour	silver
Temperature range of housing	-40 ... +85 °C		

Classifications

ETIM 6.0	EC002599	ETIM 7.0	EC002599
ETIM 8.0	EC002599	ECLASS 9.0	27-06-03-08
ECLASS 9.1	27-06-03-08	ECLASS 10.0	27-06-03-08
ECLASS 11.0	27-06-03-08	ECLASS 12.0	27-06-03-08

Approvals

Approvals



ROHS

Conform

Downloads


Engineering Data	CAD data – STEP
Catalogues	Catalogues in PDF-format
Brochures	FL FIELDWIRING EN FL FIELDWIRING EN

POS-4P M12 PG13,5 150MM

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

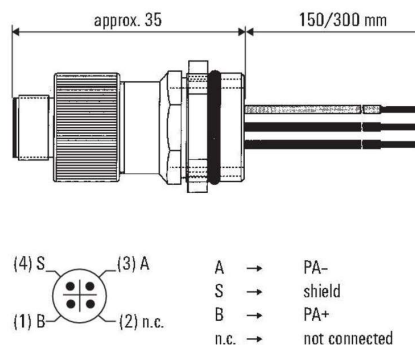

Pole scheme