

SAI-8-FMM-4P M12 10M**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Some applications require complete shielding from the sensor to the control. Our metal SAI distributors achieve this complete shielding. EMC glands are included with the distributors. Initiator LEDs are omitted.

They are available in 4- and 8-way M12 versions with 5 or 10 m cables. In addition, these distributors can be used in harsh environments e.g. in the vicinity of welding plant. Hoods with a generous connection space available so that they can be provided with a standard gland up to M25.

- no EMC problems,
- high resistance to chemical or mechanical influences,
- standard fixing dimensions.

General ordering data

Version	SAI Passive, Sensor-actuator passive distributor, M12, Fixed cable version, 10 m, No
Order No.	9456760002
Type	SAI-8-FMM-4P M12 10M
GTIN (EAN)	4032248256303
Qty.	3 pc(s).

SAI-8-FMM-4P M12 10M

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	152 mm	Depth (inches)	5.984 inch
Height	26.15 mm	Height (inches)	1.03 inch
Width	60 mm	Width (inches)	2.362 inch
Net weight	1,574.667 g		

Temperatures

Operating temperature	-20 - 90°C
-----------------------	------------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Connection data

Sheathing stripping length	100 mm	Distributor outlet	Fixed cable version
----------------------------	--------	--------------------	---------------------

Electrical data

Rated voltage, min.	10 V	Rated voltage, max.	30 V
Test voltage	1 kV	Max. current-carrying capacity per slot	4 A
Total current	9 A	Current per signal	2 A
Electrical isolation available	No	Insulation strength	10 ⁹ Ω

General technical data

Plug-in station coding	A	Protection degree	IP68
Number of poles	4	Number of contact sockets	8
Connection thread	M12	Pollution severity	3
Fire behaviour	V-0	Plugging cycles	≤ 50
LED	No		

Material data

Housing main material	Zinc diecast	Material of distributor	metal
Housing colour	silver	Hood sealing material	Polyurethane foamed
Screw socket	Nickel-plated CuZn	Contact material	CuZn
Contact surface	Gold-plated	Contact carrier material	PBT (UL 94 V0)

Technical data cable

Bending cycles	2 Mio	Bending radius, min., moving	10 x cable diameter
Colour coding	white, black, green, yellow, grey, pink, red, violet, blue, brown, Green/yellow	Halogen	No
Number of poles	4	O.D.	8.2 mm
Sheath material	PUR	Sheathing colour	black
Shielded	No	Wire cross section (Print/Online)	8 x 0.34 mm ² + 3 x 1.0 mm ²
Cable length	10 m	Suitable for cable carriers	Yes

SAI-8-FMM-4P M12 10M**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data****Classifications**

ETIM 6.0	EC002585	ETIM 7.0	EC002585
ETIM 8.0	EC002585	ECLASS 9.0	27-44-01-08
ECLASS 9.1	27-44-01-08	ECLASS 10.0	27-44-01-08
ECLASS 11.0	27-44-01-08	ECLASS 12.0	27-44-01-08

Approvals

Approvals



ROHS

Conform

Downloads

Engineering Data	CAD data – STEP
Engineering Data	WSCAD
Catalogues	Catalogues in PDF-format
Brochures	FL FIELDWIRING EN FL FIELDWIRING EN


SAI-8-FMM-4P M12 10M

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Dimensioned drawing

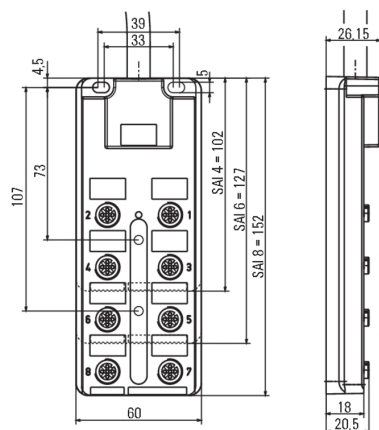

Wiring diagram

