



TACT
SWITCH

PUSH
BUTTON
SWITCH

LED TOUCH
SENSOR
SWITCH

5 DIRECTION
NAVIGATION
SWITCH
WITH LED

MEMBRANE
SWITCH

LED LIGHT
BAR

SLIDE
SWITCH

ROTARY
SWITCH

ROCKER
SWITCH

DETECT
SWITCH

ENCODER

INTERRUPTER

MINIATURE
MICRO
SWITCH

TELEPHONE
HOOK
SWITCH

DOOR
SWITCH

MINI SIZE
SOCKET

KNOB


CAP
SYMBOL

Feature :

Compact size 0.9 mm height
Good double action
Tactile feeling

Application :


Shutter of still cameras
And video cameras



SWITCH SPECIFICATIONS


POLE - POSITION	Momentary action , 1P2T
CONTACT RATING	12 V DC , 50 mA
CONTACT RESISTANCE	100 mΩ MAX. 5 V DC ; 1 A , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 100 V DC for 1 minute
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 250 V AC for 1 Minute
OPERATING FORCE	1*st 80 ± 40 gf ; 2*nd 250 ± 60 gf
OPERATING LIFE	30,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	1*st 0.25 ± 0.1 mm ; 2*nd 0.4 ± 0.15 mm

HOW TO ORDER


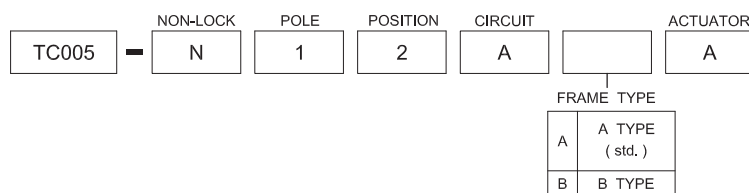


DIMESION

TC005-N12AAA



TC005-N12ABA



CIRCUIT

