

RCM14-03 AC/DC RESIDUAL CURRENT MONITOR

The RCM14-03 is a residual current monitor intended for the detection of DC and AC residual currents in 50Hz/60Hz AC installations.

The RCM14-03 is primarily intended for use in Mode 2 Electric Vehicle In-Cable Control and Protection Devices (IC-CPDs), to disconnect the supply to the Electric Vehicle under an AC or DC residual current fault condition.


The RCM14-03 may be used to detect DC and/or AC residual currents in DC, single phase or multiphase installations.

The RCM14-03 is a compact solution designed to be panel mounted. It has a JST connector for easy installation.

This product is fully compliant with the detection requirements of IEC62752.

MAIN FEATURES

- Operates from a 12V DC supply
- External Test Facility
- JST XH 2.5mm Pitch Connector JST:B4B-XH-A (LF)(SN)
- “Fault” signal output
- LED Indication for “On” and “Fault”
- For use with single or 3 phase loads
- ROHS 2 compliant
- Complies with the DC and AC detection requirements of IEC62752 (Mode 2)
- 3000A Surge Current Withstand
- 14mm Aperture

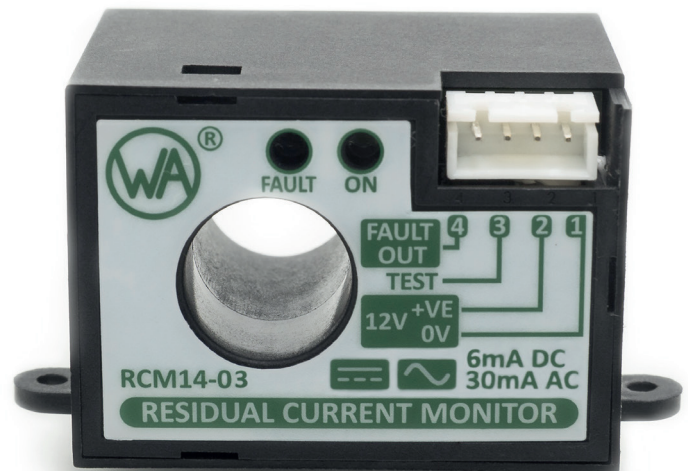

Order Code: 90130

SEE ALSO

RCM01-02	6mA DC/30mA AC Detection to IEC62752, 9mm CT Aperture
RCM14-01	6mA DC Detection to IEC62955, 14mm CT Aperture
RCM14-04	56mA DC/20mA AC Detection to UL2231, 14mm CT Aperture
RCM20-03	6mA DC/30mA AC Detection to IEC62752, 20mm CT Aperture
RCM14-03 SYSTEM	6mA DC/30mA AC Detection to IEC62752, 14mm CT Aperture, PCB Mount Sensor Board + CT

Supply Conditions

The RCM14-03 is intended for operation with a supply voltage of 12V DC +/- 10%. Performance may be compromised if the supply voltage is outside these limits.


Fault Operation & Auto Reset

When a residual fault current that exceeds the rated AC or DC levels is detected, the RCM14-03 Output pin will switch to the “Fault” state within the specified response times. The Output pin will Auto-Reset when the fault is removed.

PIN OUT	
Pin 1	0V DC
Pin 2	+12V DC
Pin 3	External Test Facility
Pin 4	Fault Signal Output (Active High Open Drain)

See Application Sheet WA-AS-015 for Connection Diagram

TECHNICAL DATA	
Relevant Product Standard	IEC62752
Rated Operating Residual Current Limits - (IΔn)	6mA DC / 30mA AC
Rated Non-operating Residual Current Limits - (IΔno)	3mA DC / 15mA AC
Response Time to residual current fault (time between appearance of fault to output going high)	According to IEC62752
DC Supply Voltage (Vcc): Supply current (no fault present) Supply current (fault current >150mA)	12V DC ± 10% 2.2mA 14.5mA
Rated Load Current - Amps The RCM14 modules can accommodate single phase loads up to 100A or three phase loads up to 40A	100A Single Phase 40A 3 Phase
Test Function (Externally applied 12V DC) - Test Current Limit	0.8mA DC
Fault Signal Output Drain Current Pull up Voltage	Active High Open Drain 100mA Maximum +24V Maximum
Environmental Operating Conditions Absolute Temperature	-40°C to +85°C
Weight	45g
Recommended Screw Type	M3 × 6 (2 pcs.)
Conditional Residual Short-circuit Current	10kA

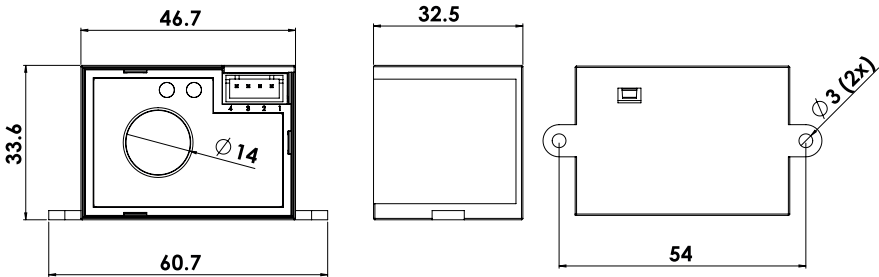

All dimensions in mm
CAD model available
on request

Disclaimer: Whilst every effort has been made to ensure the technical accuracy of this document, changes may be made to the document without notice based on information received by WA which necessitate such changes. WA ensures compliance of its products/technology with Product Standards relevant to the WA technology. However, the User of our products/technology has the sole responsibility to ensure that any Product that they produce which uses WA technology complies with the relevant Product Standards and Installation Rules as applicable to the end Product using the WA technology.

