


## AC Adapter 15VAC/400mA

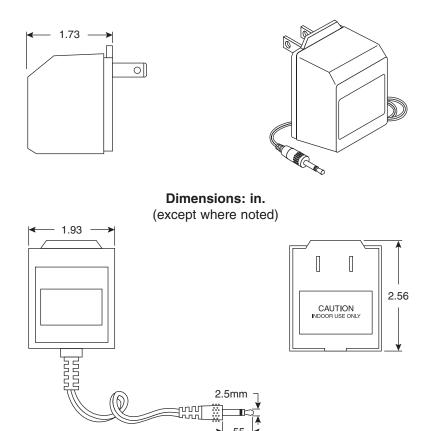

## **■** SPECIFICATIONS:

• Primary voltage: 120VAC 60Hz 12W

• Exciting current, open circuit: 120mA max.

• DC resistance ± 15%: 125Ω

• Secondary, no load voltage: 17.4VAC

• Loaded voltage: 15VAC 400mA

• DC resistance  $\pm$  10%: 1.7 $\Omega$ 

• Rated continuous output power: 6VA

Insulation resistance: 100MΩ @ 500VDC

 Dielectric strength: primary-secondary: 1,500VAC for 1 minute primary-core: 1,500VAC for 1 minute

secondary-core: 500VAC for 1 minute

• Temperature rise: 65°C max. @ rated load

· Cord length: 6ft.

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Xicon:

412-215042