

JCB Series



- 2:1 Input Range
- Operating Temperature -40°C to $+100^{\circ}\text{C}$
- Single & Dual Outputs
- 1500 VDC Isolation
- Optional Isolation to 3000 VDC
- Optional Metal Case
- 3 Year Warranty

Specification

Input

Input Voltage Range	• 5 V (4.5-9 VDC) • 12 V (9-18 VDC) • 24 V (18-36 VDC) • 48 V (36-72 VDC)
Input Current	• See table
Input Filter	• Pi network
Input Reflected Ripple	• 35 mA pk-pk through 12 μH inductor
Input Surge	• 5 V models 15 VDC for 100 ms • 12 V models 24 VDC for 100 ms • 24 V models 40 VDC for 100 ms • 48 V models 80 VDC for 100 ms
Undervoltage Lockout	• None
Reverse Voltage Protection	• None

Output

Output Voltage	• See table
Minimum Load	• Minimum load required (see note 1)
Initial Set Accuracy	• $\pm 1\%$ max
Line Regulation	• $\pm 0.5\%$ max
Load Regulation	• $\pm 0.5\%$ max
Cross Regulation	• $\pm 5\%$ on dual output models (see note 2)
Transient Response	• $< 3\%$ deviation, recovery to within 1% in 2 ms for a 50% load change
Ripple & Noise	• 60 mV pk-pk max, 20 MHz bandwidth
Short Circuit Protection	• Continuous, with auto recovery
Overvoltage Protection	• None
Overcurrent Protection	• None
Maximum Capacitive Load	• See tables
Temperature Coefficient	• $\pm 0.02/^{\circ}\text{C}$ max

General

Efficiency	• See tables
Isolation Voltage	• 1500 VDC Input to Output • For optional high isolation version 3000 VDC (see note 3) • 1500 VDC Input to Case • 1500 VDC Output to Case
Switching Frequency	• 100-400 kHz variable
Isolation Resistance	• $10^9 \Omega$
Power Density	• 7.5 W/in³
MTBF	• > 2 Mhrs to MIL-HDBK-217F at 25°C, GB

Environmental

Operating Temperature	• -40°C to $+100^{\circ}\text{C}$, derate from 100% load at $+85^{\circ}\text{C}$ to no load at $+100^{\circ}\text{C}$
Case Temperature	• $+100^{\circ}\text{C}$ max
Storage Temperature	• -40°C to $+125^{\circ}\text{C}$
Humidity	• Up to 95% RH, non-condensing
Cooling	• Natural convection

EMC & Safety

Emissions	• EN55022 Class A conducted & radiated, with external components, see application note
ESD Immunity	• EN61000-4-2, level 3, Perf Criteria A
EFT/Burst	• EN61000-4-4, level 3, Perf Criteria A (see note 7)
Surge	• EN61000-4-5, installation class 3, Perf Criteria A (see note 7)
Conducted Immunity	• EN61000-4-6, 10 V rms, Perf Criteria A
Magnetic Fields	• EN61000-4-8, 1 A/m, Perf Criteria A

Input Voltage	Output Voltage	Output Current	Input Current ⁽⁶⁾		Maximum Capacitive Load	Efficiency	Model Number ^(3,4,5)
			No Load	Full Load			
4.5-9 V	5.0 V	600 mA	40 mA	857 mA	2200 μ F	70%	JCB0305S05†^
	9.0 V	333 mA	40 mA	833 mA	470 μ F	72%	JCB0305S09†^
	12.0 V	250 mA	40 mA	810 mA	470 μ F	74%	JCB0305S12†^
	15.0 V	200 mA	40 mA	810 mA	470 μ F	74%	JCB0305S15†^
	24.0 V	125 mA	40 mA	857 mA	220 μ F	70%	JCB0305S24†^
	±5.0 V	±300 mA	40 mA	869 mA	±1000 μ F	69%	JCB0305D05†^
	±9.0 V	±167 mA	40 mA	857 mA	±220 μ F	70%	JCB0305D09†^
	±12.0 V	±125 mA	40 mA	833 mA	±220 μ F	72%	JCB0305D12†^
	±15.0 V	±100 mA	40 mA	810 mA	±220 μ F	74%	JCB0305D15†^
9-18 V	5.0 V	600 mA	20 mA	328 mA	2200 μ F	76%	JCB0312S05†^
	9.0 V	333 mA	20 mA	324 mA	470 μ F	77%	JCB0312S09†^
	12.0 V	250 mA	20 mA	316 mA	470 μ F	79%	JCB0312S12†^
	15.0 V	200 mA	20 mA	316 mA	470 μ F	79%	JCB0312S15†^
	24.0 V	125 mA	20 mA	316 mA	220 μ F	79%	JCB0312S24†^
	±5.0 V	±300 mA	20 mA	324 mA	±1000 μ F	77%	JCB0312D05†^
	±9.0 V	±167 mA	20 mA	320 mA	±220 μ F	78%	JCB0312D09†^
	±12.0 V	±125 mA	20 mA	320 mA	±220 μ F	78%	JCB0312D12†^
	±15.0 V	±100 mA	20 mA	320 mA	±220 μ F	78%	JCB0312D15†^
18-36 V	5.0 V	600 mA	12 mA	156 mA	2200 μ F	80%	JCB0324S05†^
	9.0 V	333 mA	12 mA	156 mA	470 μ F	80%	JCB0324S09†^
	12.0 V	250 mA	12 mA	152 mA	470 μ F	82%	JCB0324S12†^
	15.0 V	200 mA	12 mA	152 mA	470 μ F	82%	JCB0324S15†^
	24.0 V	125 mA	12 mA	156 mA	220 μ F	80%	JCB0324S24†^
	±5.0 V	±300 mA	12 mA	160 mA	±1000 μ F	78%	JCB0324D05†^
	±9.0 V	±167 mA	12 mA	158 mA	±220 μ F	79%	JCB0324D09†^
	±12.0 V	±125 mA	12 mA	156 mA	±220 μ F	80%	JCB0324D12†^
	±15.0 V	±100 mA	12 mA	156 mA	±220 μ F	80%	JCB0324D15†^
36-72 V	5.0 V	600 mA	8 mA	81 mA	2200 μ F	77%	JCB0348S05†^
	9.0 V	333 mA	8 mA	80 mA	470 μ F	78%	JCB0348S09†^
	12.0 V	250 mA	8 mA	78 mA	470 μ F	80%	JCB0348S12†^
	15.0 V	200 mA	8 mA	78 mA	470 μ F	80%	JCB0348S15†^
	24.0 V	125 mA	8 mA	78 mA	220 μ F	80%	JCB0348S24†^
	±5.0 V	±300 mA	8 mA	80 mA	±1000 μ F	78%	JCB0348D05†^
	±9.0 V	±167 mA	8 mA	79 mA	±220 μ F	79%	JCB0348D09†^
	±12.0 V	±125 mA	8 mA	78 mA	±220 μ F	80%	JCB0348D12†^
	±15.0 V	±100 mA	8 mA	78 mA	±220 μ F	80%	JCB0348D15†^
36-72 V	5.0 V	600 mA	8 mA	81 mA	2200 μ F	77%	JCB0348D24†^
	9.0 V	333 mA	8 mA	80 mA	470 μ F	78%	JCB0348D24†^
	12.0 V	250 mA	8 mA	78 mA	470 μ F	80%	JCB0348D24†^
	15.0 V	200 mA	8 mA	78 mA	470 μ F	80%	JCB0348D24†^
	24.0 V	125 mA	8 mA	78 mA	220 μ F	80%	JCB0348D24†^
	±5.0 V	±300 mA	8 mA	80 mA	±1000 μ F	78%	JCB0348D24†^
	±9.0 V	±167 mA	8 mA	79 mA	±220 μ F	79%	JCB0348D24†^
	±12.0 V	±125 mA	8 mA	78 mA	±220 μ F	80%	JCB0348D24†^
	±15.0 V	±100 mA	8 mA	78 mA	±220 μ F	80%	JCB0348D24†^

Notes

1. Minimum load required to meet noise and ripple and initial set accuracy specifications. Below 25% load, noise and ripple increases to 200 mV pk-pk typical and load regulation to ±1% max.
2. Cross regulation is ±5% when one output is at 100% the other is varied between 25% and 100%.
3. For optional 3000 VDC isolation, add suffix '-H' to end of part number.

† Available from Farnell & element14. See pages 284-290.

4. For optional metal case version, add suffix '-M' to end of part number, eg. JCB0324S12-HM


5. For alternative pin out, add suffix '-Z' to end of part number, eg. JCB0324S12-HMZ

6. Input current measured at nominal input voltage

7. A 220 μ F/100 V capacitor across the input is required in order to meet EN61000-4-4 & EN61000-4-5.

^ Available from Newark. See pages 291-296

Mechanical Details and Application Notes

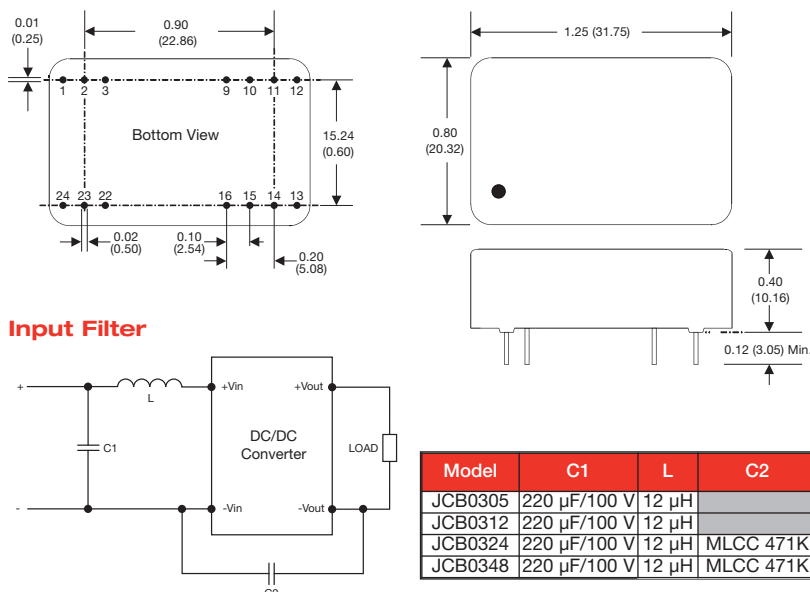

PIN CONNECTIONS						
Pin	Single	Dual	Single-H	Dual-H	Single-Z, or -HZ	Dual-Z, or -HZ
1	+Vin	+Vin	N.P.	N.P.	N.P.	N.P.
2	N.C.	-Vout	-Vin	-Vin	-Vin	-Vin
3	N.C.	Common	-Vin	-Vin	-Vin	-Vin
9	N.P.	N.P.	N.P.	Common	N.P.	Common
10	-Vout	Common	N.P.	N.P.	N.P.	N.P.
11	+Vout	+Vout	N.C.	-Vout	N.C.	-Vout
12	-Vin	-Vin	N.P.	N.P.	N.P.	N.P.
13	-Vin	-Vin	N.P.	N.P.	N.P.	N.P.
14	+Vout	+Vout	+Vout	+Vout	+Vout	+Vout
15	-Vout	Common	N.P.	N.P.	N.P.	N.P.
16	N.P.	N.P.	-Vout	Common	-Vout	Common
22	N.C.	Common	+Vin	+Vin	+Vin	+Vout
23	N.C.	-Vout	+Vin	+Vin	+Vin	+Vout
24	+Vin	+Vin	N.P.	N.P.	N.P.	N.P.

N.C. - No Connection

N.P. - No Pin

Notes

1. All dimensions are in inches (mm)
2. Weight: 0.04 lbs (20 g) approx.
3. Pin diameter: 0.02±0.002 (0.5±0.05)
4. Pin pitch tolerance: ±0.014 (±0.35)
5. Case tolerance: ±0.02 (±0.5)