

40W Open Frame Triple Output Power Supply

NAD-402X series

Feature:

- 90 to 264Vac universal input range.
- Meet UL, CSA, TUV safety .
- EMI/RFI meet VDE & FCC limit B.
- 40Watts in 127 × 76 × 34mm Size.
- 2 Year Warranty.

Specifications: typical at nominal line, full load at 25 ° C.

Input Specifications:	General Specifications:
Input voltage: 90 to 264Vac	Efficiency: 70% typical at full load
Input Frequency: 47 Hz to 440Hz	Hold-up time: 12ms @ 110Vac full load
Input inrush current: 12A at 115Vac 24A at 230Vac	EMI/RFI: VDE & FCC Class B limits
Earth leakage: 0.2mA max @ 110VAC 0.4mA max @ 230VAC	Dielectric Withstand: Input/output: 3000VAC Input/Ground: 1500VAC
Output Specifications:	Safety Approval: UL UL1950 CSA 22.2-234/950 TUV EN60950
Output Rating: See Rating Charts	
Line Regulation: ±1% max	Switching frequency: 30kHz
Load Regulation: ±2% max.	Weight: 280g
Transient Response: ±1% max.dev. (Full to half load) 500uSec recovery	MTBF: 100,000hours(MIL-HDBK-217F)
	Environmental Specifications:
Temperature Coefficient: ±0.02% / °C	Operating temperature: 0 to +50°C
Ripple & Noise: 1% P-P max	Storage temperature: -40 to +85°C
Protections: a. Over current protection b. Over voltage protection c. Over power protection d. Short circuit protection	Humidity: 5 to 95 % RH non-condensing
	Vibration: 2.4G , 5 to 500Hz
	Cooling: Free air convection

Note:

1. Vibration test: Three orthogonal axes, random vibration, 10 minutes for each axis.
2. Maximum output power is 40W.

40W Open Frame Triple Output Power Supply

NAD-402X series


Max. Power: 60W

Model No.	Vo1		Vo2		Vo3	
	V/A	Peak	V/A	Peak	V/A	Peak
NAD-4021	+5V/4A	6A	+12V/1.5	2A	-12V/0.5A	1A
NAD-4022	+5V/4A	6A	+12V/1.5A	2A	-5V/0.5A	1A
NAD-4023	+5V/4A	6A	+15V/1.2A	2A	-15V/0.5A	1A
NAD-4024	+5V/4A	6A	+24V/1A	1.5A	+12V/0.5A	1A
NAD-4025	+5V/4A	6A	+24V/1A	1.5A	-12V/0.5A	1A
NAD-4026	+5V/4A	6A	+24V/1A	1.5A	-5V/0.5A	1A

*Other output voltage versions available. Consult factory for details.

*Peak current less than 60 Sec. Peak current Can't be drawn at the same time.

Dimensions: mm±0.5mm

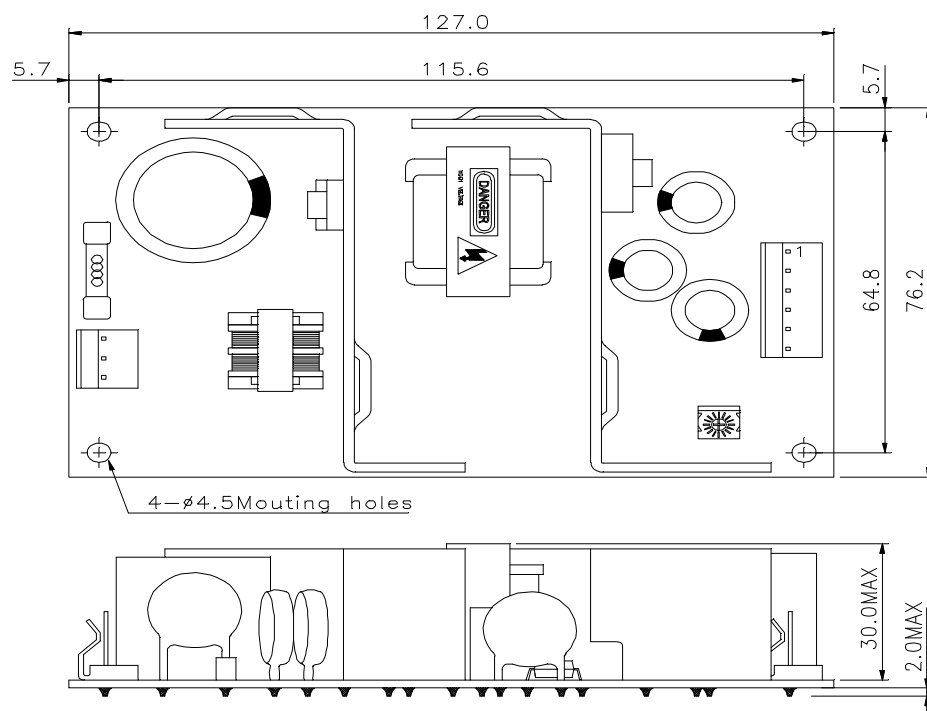

DC Output Pin Functions	
Pin1	Vo2
Pin2,3	Vo1
Pin4,5	DC COM
Pin6	Vo3

- DC output mating connector is Molex 09-91-0600
- AC input mating connector is Molex 09-953-031