




3000Vdc Isolation Single & Dual Output 1 Watt Dc-Dc Converter

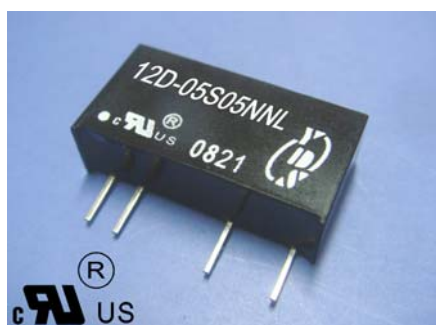

FEATURES:

- 7PIN SIP Package
- High Efficiency up to 85%
- Unregulated Output Types
- Recognized By UL 60950-1
- Internal SMD Construction
- No External Component Required
- Operating Temperature: -40°C TO +85°C
- Industry Standard Pinout



Specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified

Part Number	Output Voltage	Output Current	Efficiency	Package Style
	Vdc	mA	%TYP	
12D-XXS03NNL	3.3	303	70	1
12D-XXS05NNL	5	200	70	1
12D-XXS09NNL	9	112	75	1
12D-XXS12NNL	12	84	78	1
12D-XXS15NNL	15	67	80	1
12D-XXS24NNL	24	42	82	1
12D-XXD03NNL	±3.3	±150	70	1
12D-XXD05NNL	±5	±100	70	1
12D-XXD09NNL	±9	±56	75	1
12D-XXD12NNL	±12	±42	78	1
12D-XXD15NNL	±15	±34	80	1
12D-XXD24NNL	±24	±21	82	1
12D-XXS05N2NL	5	200	70	2
12D-XXS09N2NL	9	112	75	2
12D-XXS12N2NL	12	84	78	2
12D-XXS15N2NL	15	67	80	2
12D-XXS24N2NL	24	42	82	2
12D-XXD05N2NL	±5	±100	70	2
12D-XXD09N2NL	±9	±56	75	2
12D-XXD12N2NL	±12	±42	78	2
12D-XXD15N2NL	±15	±34	80	2
12D-XXD24N2NL	±24	±21	82	2

Note: 1. "XX" Is Input Voltage :03=3.3Vdc, 05=5Vdc, 09=9Vdc, 12=12Vdc, 15=15Vdc, 24=24Vdc, 48=48Vdc.

2. Over 48Vdc input voltage, using the 2nd package.

3. The input voltage increases, there will be an increase in efficiency.

Input Specifications

Parameters	Conditions	Min	Typ	Max	Units
Voltage Tolerance	Vo, Io Nom			±5	%
Filter	Capacitor				

Output Specifications

Parameters	Conditions	Min	Typ	Max	Units
Voltage Tolerance	100% full load			±5	%
Short Circuit Protection	Short Term			1 Sec	
Line Regulation	For 1.0% OF Vin		1.2		%
Load Regulation	3.3V, 5V (10% To 100% F.L.)			15	%
Load Regulation	9V, 12V, 15V, 24V (10% To 100% F.L.)			10	%
Ripple & Noise	BW=DC To 20MHz			100	mVp-p
Transient response setting time	50% load step change		350		us




3000Vdc Isolation Single & Dual Output 1 Watt Dc-Dc Converter


General Specifications

Parameters	Conditions	Min	Typ	Max	Units
Isolation Resistance	500Vdc	1000			MΩ
Switching Frequency	Full load,nominal input		100		KHz
Operation Temperature		-40		+85	°C
Humidity	Non Condensing			95	%
Cooling	Free air Convection				
Case material	DAP				
MTBF	MIL-HDBK-217F@25°C	3500000			Hours
Weight	Package1 or Package2		2.1 or 2.7		g
Dimensions	Package 1	19.5x6.0x10.0			mm
Dimensions	Package 2	19.5x7.1x10.0			mm



Temperature Derating Graph

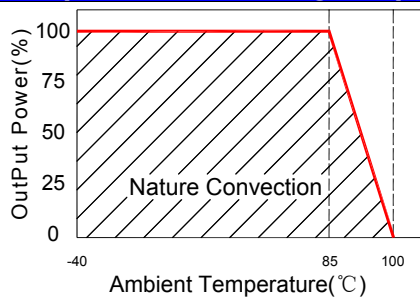

Tolerance Envelope Graph

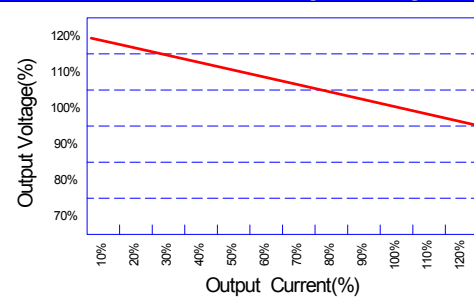

Recommended Test Circuit

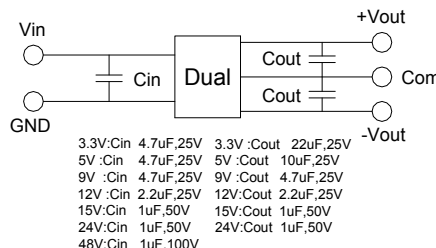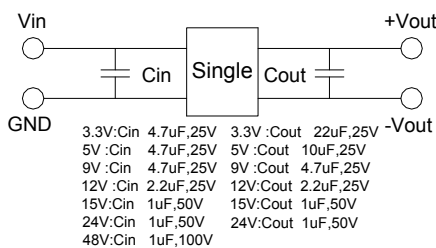


Part Number

12D - 05 S 05 N 2 NL
 A B C D E F G

A:Series
 B:Input Voltage
 C:Single(S)Dual(D)
 D:Output Voltage
 E:Unregulated(N)
 F:Package
 G:RoHS Version

Markings and dimensions

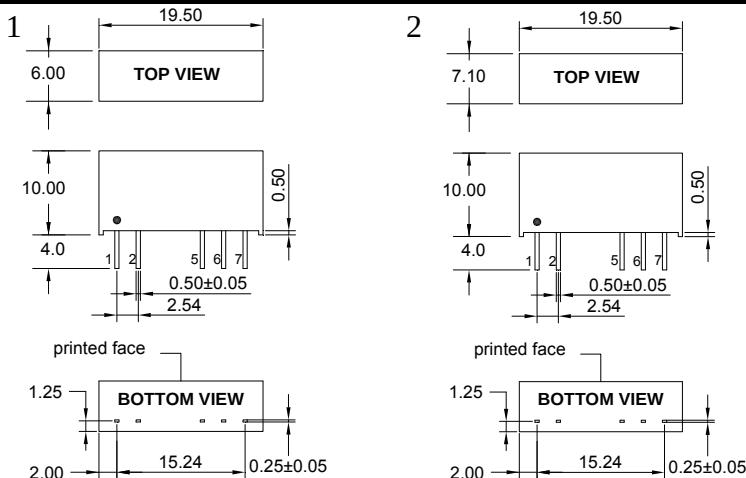


UNIT:mm Unless otherwise specified,all tolerances are ±0.25

PIN Connection

PIN	1	2	5	6	7
Single	+Vin	-Vin	-Vout	No Pin	+Vout
Dual	+Vin	-Vin	-Vout	Com	+Vout

Packaging

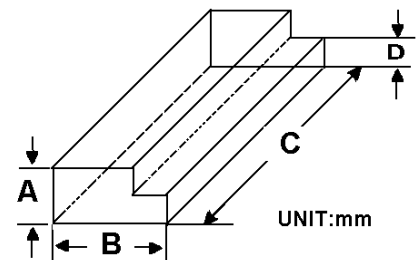

Size(mm)			
A	B	C	D
9.5	16.5	522	5.0