# **Magnetic Proximity Sensors (Hall Effect)**

## MP1005 - MP1007 Sensors

Solid state magnetic proximity sensor with electrical immunity protection



#### **Description**

The MP1 Series sensors are one-piece non-contact solid-state position sensors. The sensors operate through the use of Hall Effect technology with magnetic fields generated by permanent magnets. They provide a sinking current output.

#### **Features**

- · Solid state reliability
- · Stable output over operating temperature range
- Compatible with unregulated power supply
- · South pole activated
- Open collector (sinking or NPN) output can be used with bipolar or CMOS logic circuits with suitable pull-up resistor
- RoHS compliant
- IP67

## **Typical Applications**

- Door position & interlock
- · Limit switch
- Flow/speed
- Home security
- Pedal switch

## **Environmental Specifications**

=	
Operating Temperature (MP100502)	-40 °C to 85 °C (-40 °F to 185 °F)
Operating Temperature (MP100701)	-40 °C to 150 °C (-40 °F to 302 °F)
Storage Temperature (MP100502)	-40 °C to 85 °C (-40 °F to 185 °F)
Storage Temperature (MP100701)	-40 °C to 150 °C (-40 °F to 302 °F)
Ingress Protection	IP67

#### **Electrical Specifications**

Operating Supply Voltage	5 to 24 VDC
Supply Current	4.1 mA typ., 7.5 mA max.
Output Current (Sink)	25 mA max.
Output Off Voltage	30 VDC
Maximum Input Voltage	30 VDC
Maximum Reverse Voltage	30 VDC
Recommended Pull-up Resistor	See chart

#### **Mechanical Specifications**

•	
Housing Material	Aluminium
Maximum Installation Torque Limit	50 in lbs on threads
Turn on / off	245 Gauss / 60 Gauss

#### **Products**

Part Number	Housing Color	Termination
MP100502*	Red	20 AWG x 1 m
MP100701	Black	20 AWG x 1 m

<sup>\*</sup>Not commonly stocked; please contact the factory or your distributor.




Note: An external pull-up resistor is required, the value of which is dependent on the supply voltage. The resistor should be connected between the output and Vcc. Refer to the wiring diagram for lead colors or pin numbering as applicable.

## **Recommended External Pull-Up Resistor**


Volts DC	5	9	12	15	24
Ohms	1k	1.8k	2.4k	3k	3k

## **Open Collector Sinking Block Diagram**

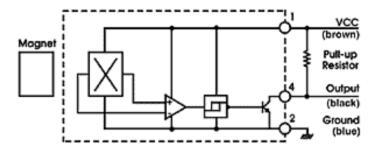

## **Dimensions mm (inches)**

#### MP100502

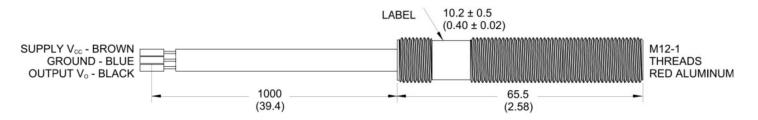

#### MP100701

