


ZETTLER MAGNETICS CO., LTD.

10W HIGH PRECISION SINGLE OUTPUT SERIES AC-DC POWER MODULE (P-S ISOLATED)

FEATURES

- Input Range 100-240VAC 50/60Hz
- Output range from 3V-24VDC
Also can be customized
- Switching Power Module For PCB Mount
- Encapsulated Design Prevent dust and humidity
- Self-Extinguishing Plastic 94V-0
- High efficiency, Low Temperature Rise
- Dielectric Strength 3600VAC
- Integrated perfect Protection
Low standby power and Leakage Current
- Integrated EMC network
- Dielectric Strength: 3600Vac 5mA1min
- Protection: OLP: Output over load protection
OSP: Output short protection
OTP: Over temperature protection
- Compact Size
- UL, TUV Approved

OUTLINE DIMENSIONS

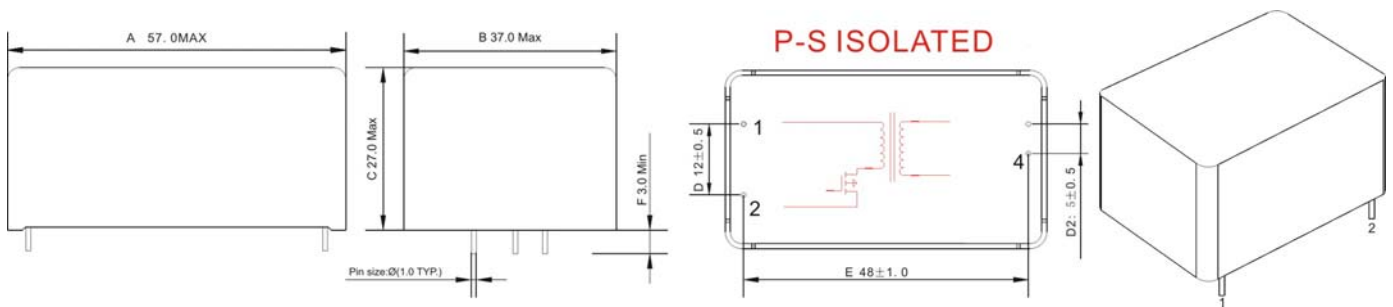

ELECTRONIC SPECIFICATIONS

Order Number	Leakage Current (Ma)	No load Loss (W)	Output Voltage (VDC.)	Output Current (A)	Voltage Accuracy	Ripple	Noise	Ambient TEMP(°C)	Weight	Certificate		
										TUV	UL	CE
ZP10S0300W	0.3mA	0.3W	3.3	3	±3%	<50mV	<1% Vout	55	80g	●		●
ZP10S0500W	0.3mA	0.3W	5	2	±3%	<50mV	<1% Vout	70	80g	●		●
ZP10S0600W	0.3mA	0.3W	6	1.66	±3%	<50mV	<1% Vout	70	80g	●		●
ZP10S0700W	0.3mA	0.3W	7	1.43	±3%	<50mV	<1% Vout	70	80g	●		●
ZP10S0800W	0.3mA	0.3W	8	1.25	±3%	<50mV	<1% Vout	70	80g	●		●
ZP10S0900W	0.3mA	0.3W	9	1.11	±3%	<50mV	<1% Vout	70	80g	●		●
ZP10S1000W	0.3mA	0.3W	10	1	±3%	<50mV	<1% Vout	70	80g	●		●
ZP10S1200W	0.3mA	0.3W	12	0.83	±3%	<50mV	<1% Vout	70	80g	●		●
ZP10S1500W	0.3mA	0.3W	15	0.66	±3%	<50mV	<1% Vout	70	80g	●		●
ZP10S1800W	0.3mA	0.3W	18	0.55	±3%	<50mV	<1% Vout	70	80g	●		●
ZP10S2400W	0.3mA	0.3W	24	0.42	±3%	<50mV	<1% Vout	70	80g	●		●