


LTR	ECO No.	REVISION	DR	CK	AP	AP	DATE
A		RELEASED	GH				10/04/99
B	7943	UPDATE SILKSCREEN	LS		DK		08 JUL 04
C	8018	MODIFY HEIGHT OF CHASSIS	LS		J.O		02 NOV 04
D	8398	ADD RoHS NOTE	J.O				7 NOV 06

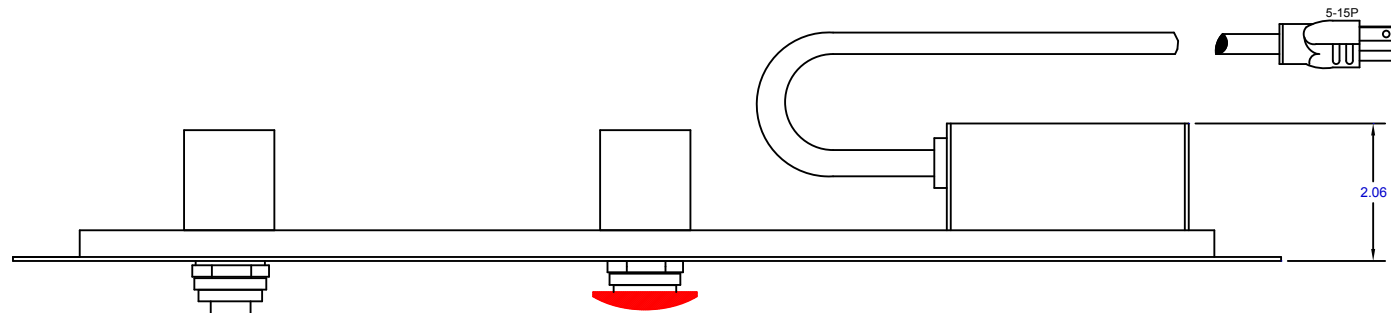

1. RACK MOUNTED STEEL CHASSIS BLACK FED STD 595-27038  
MEDIUM TEXTURE  
19.00" WIDE STANDARD RACK MOUNT  
3.44" HIGH  
2.06" DEEP

2. INPUT: 120VAC SINGLE PHASE, 12AMP 50/60 HZ  
POWER CABLE: 6 FOOT 14/3 SJT CABLE WITH NEMA 5-15 PLUG

3. OUTPUT: 120 VAC AT ONE NEMA 5-15 RECEPTACLE,  
12 AMP MAX CURRENT

4. SELECTOR SWITCH: 2 POSITION, TURNS UNIT ON AND OFF


5. EMERGENCY OFF SWITCH: RED MUSHROOM PUSHBUTTON SWITCH.  
PUSH TO ACTIVATE EMERGENCY POWER OFF;  
TURN KNOB CLOCKWISE TO RESET

6. REMOTE CABLE: 22/3 CABLE, 15 FEET LONG WITH 3 PIN CONNECTOR.


7. OPERATION: CONNECT TO REMOTE PORT OF POWER CONTROLLER  
WITH NON-LATCHING REMOTE:

PIN 1 POWER ON  
PIN 2 EMERGENCY SHUTDOWN  
PIN 3 SIGNAL RETURN (NOT GROUND)


SAMPLE EPO/START REMOTE STATION



8. RoHS COMPLIANT PRODUCT PER DIRECTIVE 2002/95/EC  
WITH APPLICABLE EXEMPTIONS.

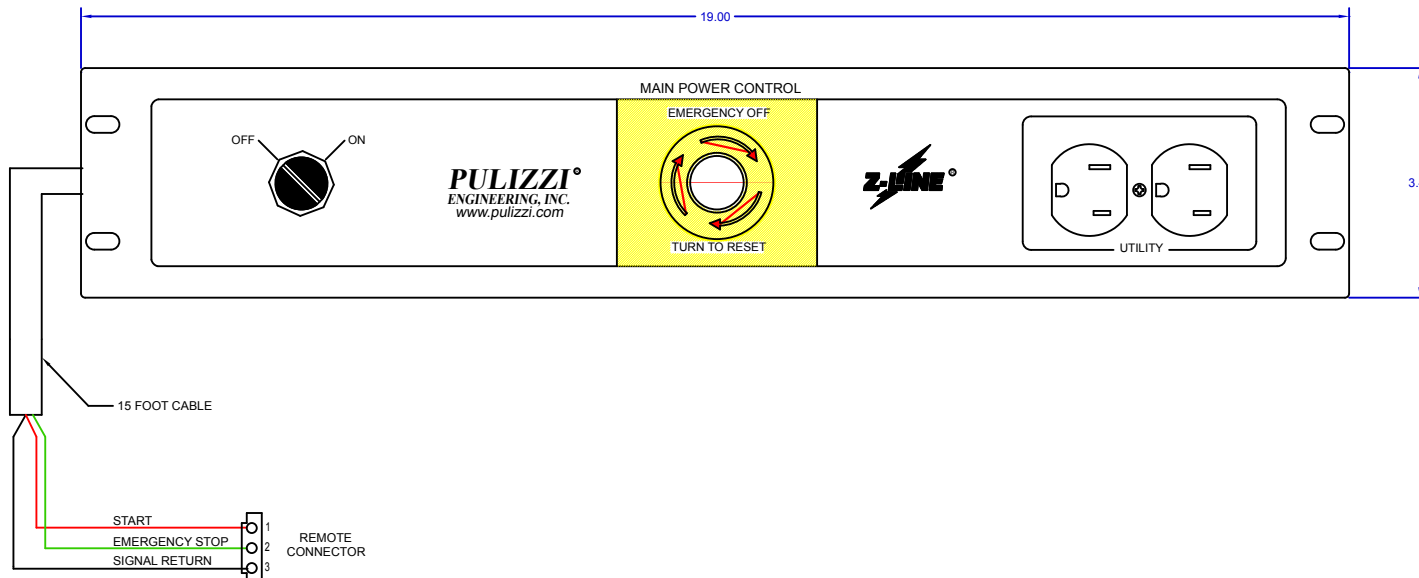

PEI APPROVAL

		<b>PULIZZI ENGINEERING INC.</b>		3200 S. Susan Street, Santa Ana, CA 92704 (714) 540-4229 Fax (714) 641-9062		CAGE CODE 70513	
THE INFORMATION AND DESIGN DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF PULIZZI ENGINEERING INC. PULIZZI ENGINEERING INC. RESERVES ALL PATENT, PROPRIETARY DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALE RIGHTS THEREIN AND TO ANY ARTICLE DISCLOSED THEREIN, EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE FOREGOING DOES NOT APPLY TO VENDOR PROPRIETARY PARTS. COPYRIGHT 2004 P.E.I.		DIMENSIONS IN INCHES		TITLE		ENGINEERING DRAWING	
		TOLERANCES:		RCP200-BLK ASSY 4014			
		DECIMALS ANGLES					
		X.XX .005 4 0.5°					
		UNLESS OTHERWISE SPECIFIED		DRAWN BY: GH		DWG. FILE NAME: RCP_200_BLK_4014D_ME.DWG	
		X.XXX .010		SCALE: 1:1		DWG NO.:	
				SIZE: D		RCP_200_BLK_4014D_ME	
				SHEET: 1			