

## Quick Start Guide

This guide is designed to help you set up and install the L-GAGE® LE Laser Gauging Sensor. For complete information on programming, performance, troubleshooting, dimensions, and accessories, please refer to the Instruction Manual at [www.bannerengineering.com](http://www.bannerengineering.com). Search for p/n 194205 to view the manual. Use of this document assumes familiarity with pertinent industry standards and practices.



### WARNING: Not To Be Used for Personnel Protection

Never use this device as a sensing device for personnel protection. Doing so could lead to serious injury or death. This device does not include the self-checking redundant circuitry necessary to allow its use in personnel safety applications. A sensor failure or malfunction can cause either an energized or de-energized sensor output condition.

## Features and Indicators

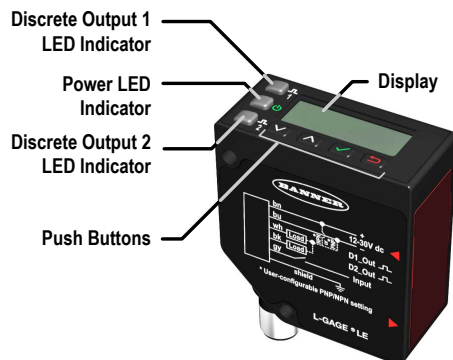


Figure 1. LE IO-Link Sensor Features

Three LED indicators provide ongoing indication of the sensing status.

### Power LED Indicator

Solid Green = Normal operation, power On and laser On  
Flashing Green (1 Hz) = Power On and laser Off (laser enable mode)

### Discrete Output LED Indicators

Solid Amber = Discrete Output is On  
Off = Discrete Output is Off

## Laser Description and Safety Information



CAUTION: Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure. Do not attempt to disassemble this sensor for repair. A defective unit must be returned to the manufacturer.

### Class 2 Laser Models



CAUTION: Never stare directly into the sensor lens. Laser light can damage your eyes. Avoid placing any mirror-like object in the beam. Never use a mirror as a retroreflective target.



### For Safe Laser Use - Class 2 Lasers

- Do not stare at the laser.
- Do not point the laser at a person's eye.
- Mount open laser beam paths either above or below eye level, where practical.
- Terminate the beam emitted by the laser product at the end of its useful path.

Reference IEC 60825-1:2007, Section 8.2.



## Class 2 Lasers

Class 2 lasers are lasers that emit visible radiation in the wavelength range from 400 nm to 700 nm, where eye protection is normally afforded by aversion responses, including the blink reflex. This reaction may be expected to provide adequate protection under reasonably foreseeable conditions of operation, including the use of optical instruments for intrabeam viewing.

### Class 2 Laser Safety Notes

Low-power lasers are, by definition, incapable of causing eye injury within the duration of a blink (aversion response) of 0.25 seconds. They also must emit only visible wavelengths (400 to 700 nm). Therefore, an ocular hazard may exist only if individuals overcome their natural aversion to bright light and stare directly into the laser beam.



Figure 2. FDA (CDRH) warning label (Class 2)

## Class 1 Laser Models

Class 1 lasers are lasers that are safe under reasonably foreseeable conditions of operation, including the use of optical instruments for intrabeam viewing.

Laser wavelength: 650 nm      Output: < 0.22 mW      Pulse Duration: 150  $\mu$ s to 900  $\mu$ s



Figure 3. FDA (CDRH) warning label (Class 1)

## Sensor Installation



**NOTE:** Handle the sensor with care during installation and operation. Sensor windows soiled by fingerprints, dust, water, oil, etc. may create stray light that may degrade the peak performance of the sensor. Blow the window clear using filtered, compressed air, then clean as necessary using 70% isopropyl alcohol and cotton swabs or water and a soft cloth.

## Sensor Orientation

Correct sensor-to-object orientation is important to ensure proper sensing. See the following figures for examples of correct and incorrect sensor-to-object orientation as certain placements may pose problems for sensing distances.

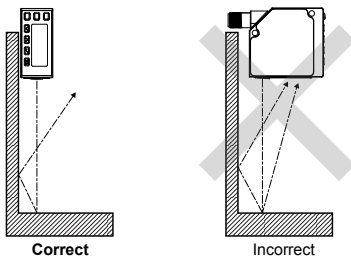


Figure 4. Orientation by a wall

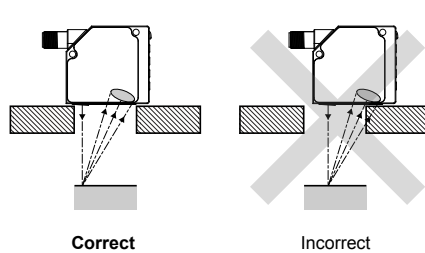


Figure 5. Orientation in an opening




Figure 6. Orientation for a turning object

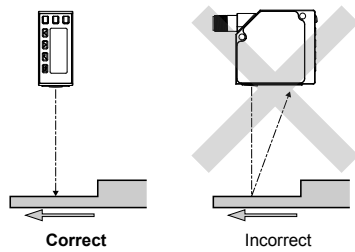


Figure 7. Orientation for a height difference

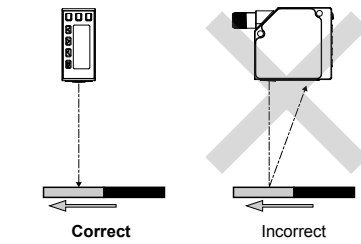


Figure 8. Orientation for a color or luster difference




Figure 9. Orientation for a highly reflective target

Applying tilt to sensor may improve performance on reflective targets. The direction and magnitude of the tilt depends on the application, but a 15° tilt is often sufficient.

### Mount the Sensor

1. If a bracket is needed, mount the sensor onto the bracket.
2. Mount the sensor (or the sensor and the bracket) to the machine or equipment at the desired location. Do not tighten the mounting screws at this time.
3. Check the sensor alignment.
4. Tighten the mounting screws to secure the sensor (or the sensor and the bracket) in the aligned position.

### Wiring Diagrams


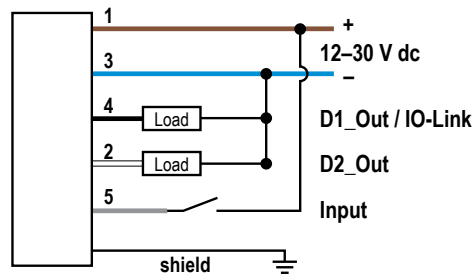


Figure 10. IO-Link Models

#### Key



- 1 = Brown
- 2 = White
- 3 = Blue
- 4 = Black
- 5 = Gray

## Display



Figure 11. LE550 Display in Run Mode

The display is a 2-line, 8-character LCD. The main screen is the Run mode screen, which shows the real-time distance measurement.

## Buttons

Use the sensor buttons Down, Up, Enter, and Escape to program the sensor and to access sensor information.



### Down and Up Buttons

Press Down and Up to:

- Access the Quick Menu from Run mode
- Navigate the menu systems
- Change programming settings

When navigating the menu systems, the menu items loop.

Press Down and Up to change setting values. Press and hold the buttons to cycle through numeric values. After changing a setting value, it slowly flashes until the change is saved using the Enter button.



### Enter Button

Press Enter to:

- Access the Sensor Menu from Run mode
- Access the submenus
- Save changes

In the Sensor Menu, a check mark ✓ in the lower right corner of the display indicates that pressing Enter accesses a submenu.

Press Enter to save changes. New values flash rapidly and the sensor returns to the parent menu.



### Escape Button

Press Escape to:

- Leave the current menu and return to the parent menu
- Return to Run mode from the Quick Menu



**Important:** Pressing Escape discards any unsaved programming changes.

In the Sensor Menu, a return arrow ↩ in the upper left corner of the display indicates that pressing Escape returns to the parent menu.

Press and hold Escape for 2 seconds to return to Run mode from any menu or remote teach.

## Sensor Programming

Program the sensor using the buttons on the sensor or the remote input (limited programming options).

From Run mode, use the buttons to access the Quick Menu and the Sensor Menu. See [Quick Menu](#) on page 4, [Sensor Menu \(MENU\)](#) on page 5, and the instruction manual (p/n 194205) for more information on the options available from each menu. For TEACH options, follow the TEACH instructions in the instruction manual.

In addition to programming the sensor, use the remote input to disable the buttons for security, preventing unauthorized or accidental programming changes. See the instruction manual for more information.

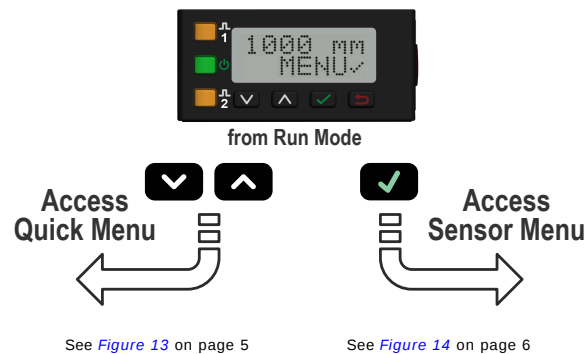


Figure 12. Accessing the Menus

### Quick Menu

The sensor includes a Quick Menu with easy access to view and change the discrete output switch points. Access the Quick Menu by pressing Down ▼ or Up ▲ from Run mode. When in the Quick Menu, the current distance measurement displays on the first line and the menu name and the discrete output switch points alternate on the second line of the display. Press Enter ✓ to access the switch points. Press Down ▼ or Up ▲ to change the switch point to the desired value. Press Enter ✓ to save the new value and return to the Quick Menu.

## Quick Menu

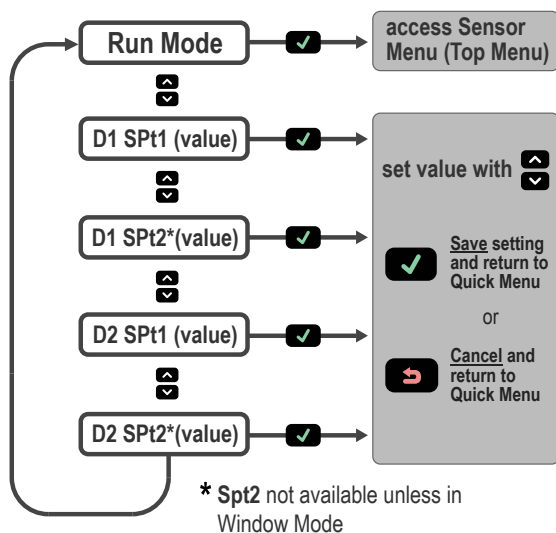


Figure 13. Quick Menu Map (Window Mode)

## Sensor Menu (MENU)

Access the Sensor Menu by pressing **Enter** (green checkmark icon) from Run mode, when MENU is displayed. The Sensor Menu includes several submenus that provide access to view and change sensor settings and to view sensor information.

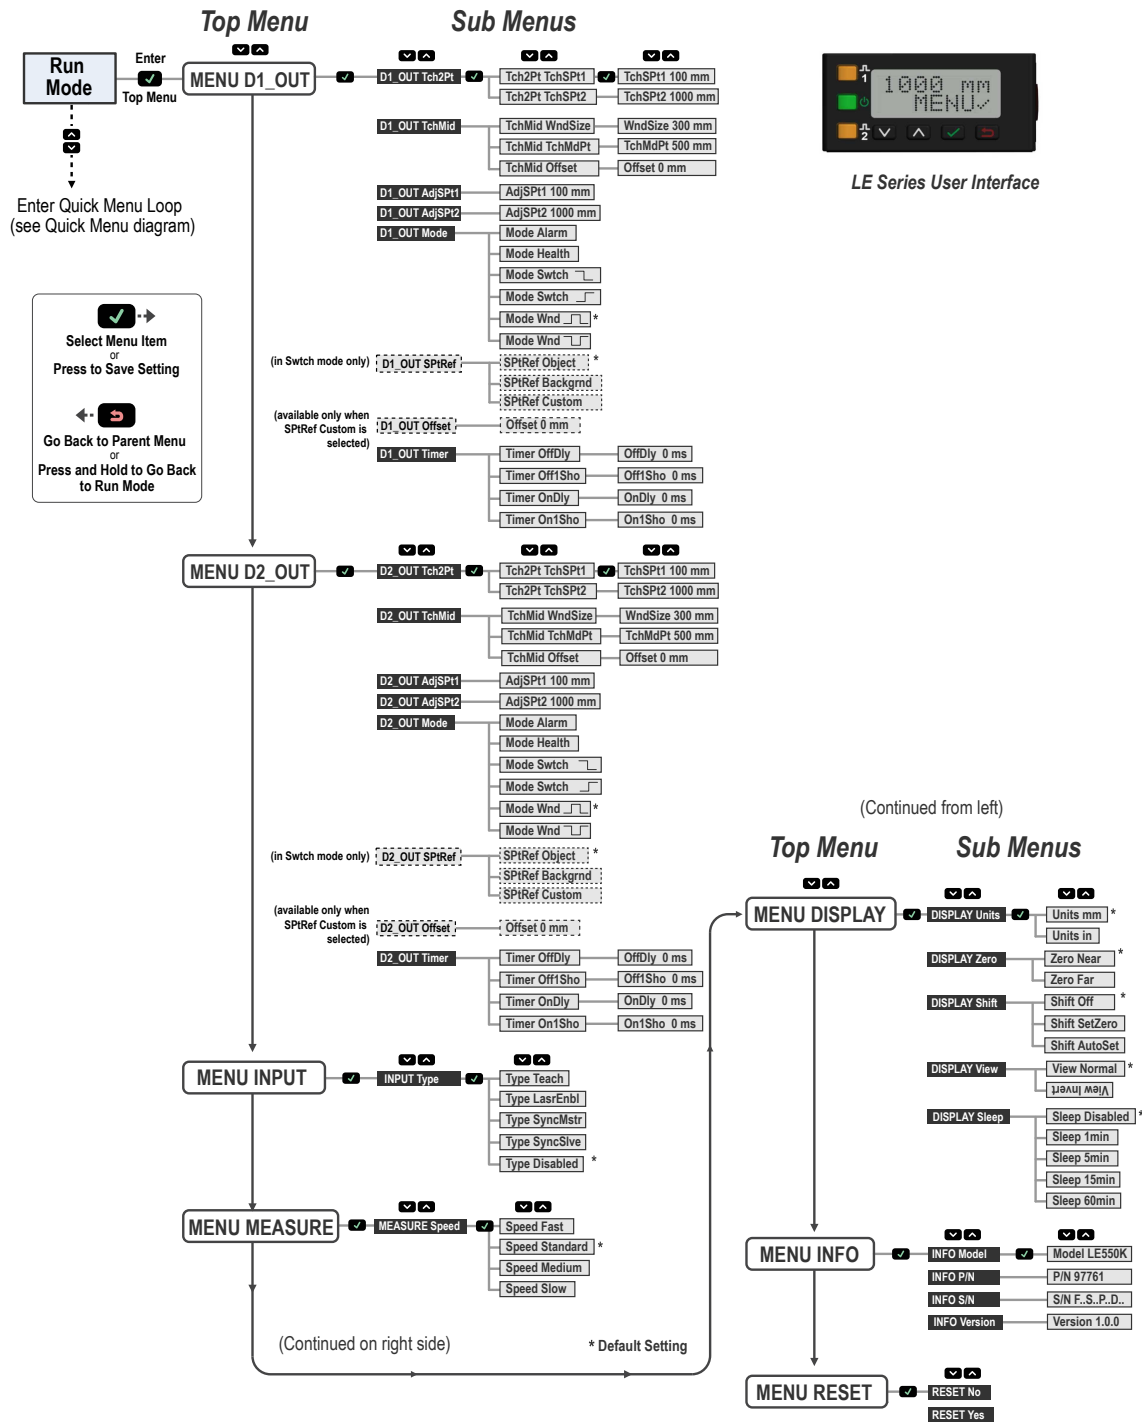


Figure 14. LE550 Sensor Menu Map

## Specifications

Supply Voltage (Vcc)  
12 to 30 V dc

Power and Current Consumption, exclusive of load  
Normal Run Mode: 1.7 W, Current consumption < 70 mA at 24 V dc

Supply / Output Protection Circuitry  
Protected against reverse polarity and transient overvoltages

Sensing Beam  
Class 2 laser models: visible red, 650 nm  
Class 1 laser models: visible red, 650 nm

Sensing Range  
LE250: 100 mm to 400 mm (3.94 to 15.75 inches)  
LE550: 100 mm to 1000 mm (3.94 to 39.37 inches)

**Output Configuration**

D1\_Out: IO-Link, Push/pull  
D2\_Out: PNP

**Output Ratings**

100 mA maximum capability each output  
Saturation: Less than 2 V  
Off-State Leakage Current: Less than 50 µA PNP at 30 V (N.A. push/pull)

**Remote Input**


Allowable Input Voltage Range: 0 to Vcc  
Active High (internal weak pulldown—sourcing current):

High State > Vcc – 1.5 V dc  
Low State < Vcc – 5 V dc

Input Impedance > 10 kOhm

**Measurement/Output Rate**

Class 2 Laser Models: < 1 ms  
Class 1 Laser Models (Fast): < 1 ms  
Class 1 Laser Models (Std/Medium/Slow): < 2 ms

**Typical Beam Spot Size<sup>1</sup>**

|   | Distance (mm) |     |     |              |      |      |
|---|---------------|-----|-----|--------------|------|------|
|   | LE250 Models  |     |     | LE550 Models |      |      |
|   | 100           | 250 | 400 | 100          | 550  | 1000 |
| x | 3.2           | 2.1 | 1.2 | 8.4          | 10.5 | 12.1 |
| y | 2.2           | 1.5 | 0.9 | 3.5          | 4.2  | 4.9  |

**IO-Link Interface**

Supports Smart Sensor Profile: Yes  
Baud Rate: 38400 bps  
Process Data Widths: 32 bits  
IODD files: Provides all programming options of the display, plus additional functionality

**Environmental Rating**

IEC IP67, NEMA 6

**Operating Conditions**

–20 °C to +55 °C (–4 °F to +131 °F)  
90% at +55 °C maximum relative humidity (non-condensing)

**Storage Temperature**

–30 °C to +65 °C (–22 °F to +149 °F)

**Vibration/Mechanical Shock**

All models meet Mil. Std. 202 G requirements method 201A. Also meets IEC 60947-5-2.

**Application Note**

For optimum performance, allow 10 minutes for the sensor to warm up

**Certifications**

UL Environmental Rating: Type 1

**Minimum Window Size**

LE250: 1 mm (0.039 inches)  
LE550: 10 mm (0.39 inches)

**Boresighting**

LE250: 4 mm radius at 400 mm  
LE550: 1 cm radius at 1 m

**Maximum Torque**

2 N·m (17.7 in-lbs)

**Indicators**

Power LED Indicator  
Solid Green = Normal operation, power On and laser On  
Flashing Green (1 Hz) = Power On and laser Off (laser enable mode)  
Discrete Output LED Indicator  
Solid Amber = Discrete Output is On  
Off = Discrete Output is Off

**Construction**

Housing: die-cast zinc  
Window: acrylic

**Ambient Light Immunity**

Class 2 laser models: > 10,000 lux  
Class 1 laser models: > 5,000 lux

**Response Time**

|                   | Class 1 Laser Models | Class 2 Laser Models |
|-------------------|----------------------|----------------------|
| Fast <sup>2</sup> | 2 ms                 | 2 ms                 |
| Standard          | 10 ms                | 5 ms                 |
| Medium            | 30 ms                | 15 ms                |
| Slow              | 100 ms               | 50 ms                |

**Delay at Power Up**

3 s

**Repeatability**

See *Performance Curves*

**Temperature Effect**

See *Performance Curves*

**Required Overcurrent Protection**

**WARNING:** Electrical connections must be made by qualified personnel in accordance with local and national electrical codes and regulations.

Overcurrent protection is required to be provided by end product application per the supplied table.

Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply.

Supply wiring leads < 24 AWG shall not be spliced.

For additional product support, go to [www.bannerengineering.com](http://www.bannerengineering.com).

| Supply Wiring (AWG) | Required Overcurrent Protection (Amps) |
|---------------------|----------------------------------------|
| 20                  | 5.0                                    |
| 22                  | 3.0                                    |
| 24                  | 2.0                                    |
| 26                  | 1.0                                    |
| 28                  | 0.8                                    |
| 30                  | 0.5                                    |

<sup>1</sup> Beam spot size is calculated as 1.6 times the D4σ measured value

<sup>2</sup> Response time for lateral entry of object into measurement range < 5 ms

## Performance Curves

LE250 Dual Discrete Models

LE550 Dual Discrete Models

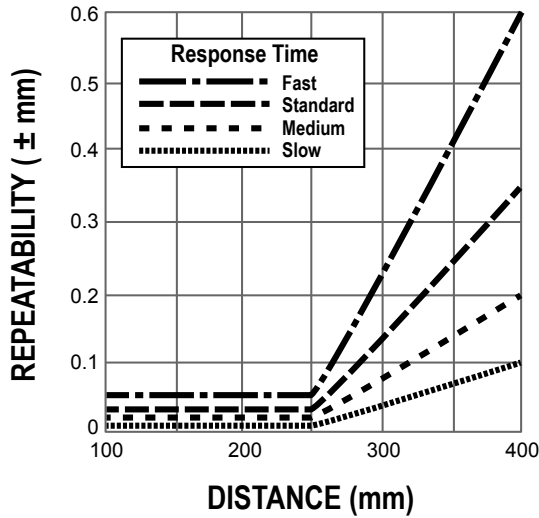


Figure 15. Repeatability (90% to 6% reflectance)

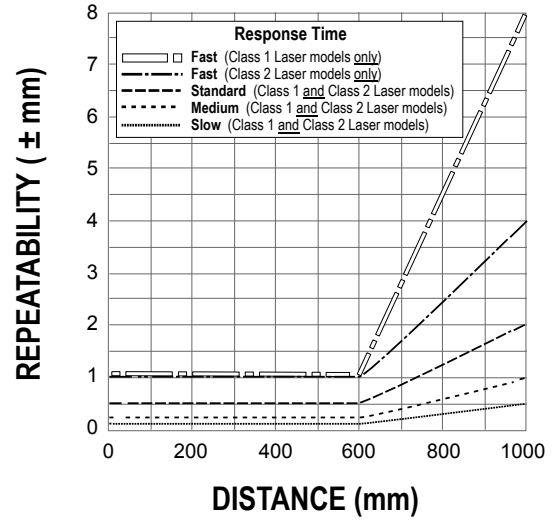


Figure 16. Repeatability (90% to 6% reflectance)

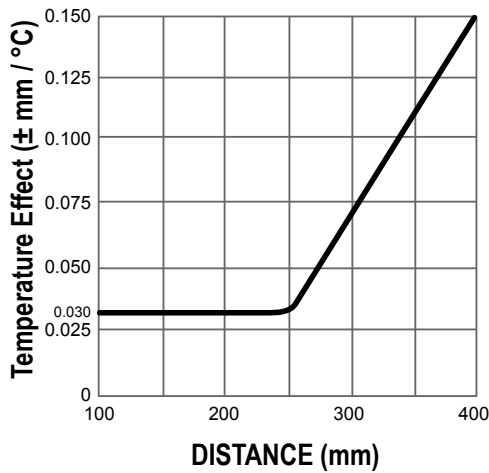


Figure 17. Temperature Effect

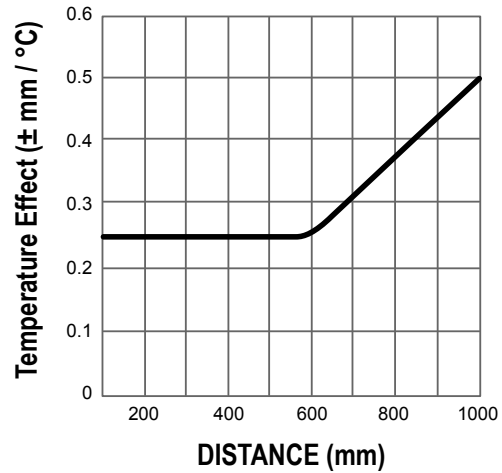


Figure 18. Temperature Effect

## Banner Engineering Corp. Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: [www.bannerengineering.com](http://www.bannerengineering.com).