


Photoelectrics Through-beam, Transistor Output Type PA12B.T20..

CARLO GAVAZZI



- Elevators, Escalators and Entrance control
- Range 20 m
- ESPE-Type 2, PL C.
- Modulated, infrared light
- Supply voltage: 10 to 30 VDC
- Output: 100 mA, NPN or PNP type
- Make or break switching
- Protection: reverse polarity, short circuit, transients
- Cable versions with or without connector
- Emitter mute and power adjustment
- High neighbour immunity, 3-codes
- CE, UL325 and UL508 approved

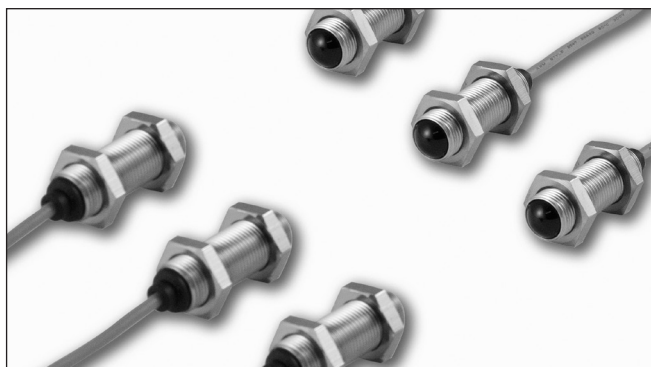

Product Description

The PA12BNT. is a through beam sensor set specially designed for Elevators, Escalators, Entrance control to meet the requirements in the door market. The housing is very robust and is known for its high long term reliability mute. The emitter

has a mute input to turn it off for evaluation of the sensor function.

The emitter and receivers can be delivered in 3 different codes on order to improve neighbour immunity. Available in 10-30 VDC version.

Ordering Key

PA12B1T20NO-C2

Type	_____
Housing style	_____
Housing size	_____
Housing material	_____
Sensor code	_____
Detection principle	_____
Sensing distance	_____
Output type	_____
Output configuration	_____
Connection type	_____
Cable connector	_____

Type Selection

Housing diameter	Range S _n	Con-nec-tor	Ordering no. Receiver NPN, NO	Ordering no. Receiver NPN, NC	Ordering no. Receiver PNP, NO	Ordering no. Receiver PNP, NC	Ordering no. Emitter
M12 mm Code 1	20 m	NO	PA12B1T20NO	PA12B1T20NC	PA12B1T20PO	PA12B1T20PC	PA12B1T20
M12 mm Code 2	20 m	NO	PA12B2T20NO	PA12B2T20NC	PA12B2T20PO	PA12B2T20PC	PA12B2T20
M12 mm Code 3	20 m	NO	PA12B3T20NO	PA12B3T20NC	PA12B3T20PO	PA12B3T20PC	PA12B3T20
M12 mm Code 1	20 m	YES	PA12B1T20NO-C2	PA12B1T20NC-C2	PA12B1T20PO-C2	PA12B1T20PC-C2	PA12B1T20-C2
M12 mm Code 2	20 m	YES	PA12B2T20NO-C2	PA12B2T20NC-C2	PA12B2T20PO-C2	PA12B2T20PC-C2	PA12B2T20-C2
M12 mm Code 3	20 m	YES	PA12B3T20NO-C2	PA12B3T20NC-C2	PA12B3T20PO-C2	PA12B3T20PC-C2	PA12B3T20-C2

Note: Please order emitter and receiver separately

Specifications Emitter

Rated operational volt. (U_B)	10 to 30 VDC	Light source	LED, 880 nm
Ripple (U_{rrp})	≤ 10%	Light type	Infrared, modulated
Supply current	≤ 20 mA	Light spot	1580 mm @ 12 m
Protection	Reverse polarity, transients	Emitter angle	± 3.8° @ 12 m
Power ON delay (t_v)	≤ 100 ms	Power adjustment	4...24 m in 19 steps
Control input		R _x ~ 1.5 kΩ -10 kΩ	
Normal oper.	> 1.5 VDC		
Mute	< 1.2 VDC		

Specifications Receiver

Rated operating dist. (S_n)	20 m	Protection	Short-circuit, reverse polarity, transients
Blind zone	None	Utility category	DC12 Control of resistive loads and solid state loads with optical insulation
Temperature drift	≤ 0.4%/°C		DC13 Control of electromagnets
Hysteresis (H)	3 - 20%	Ambient light	> 20.000 Lux (EN60947-5-2)
Rated operational volt. (U_B)	10 to 30 VDC (ripple included)	Detection angle	± 2.9° @ 12 m
Ripple (U_{rrp})	≤ 10%	Operating frequency (f)	30 Hz
No load supply current (I_o)	≤ 13 mA	Response time	OFF-ON (t _{ON}) ≈ 10 ms ON-OFF (t _{OFF}) ≈ 20 ms
Output current		Power ON delay (t_v)	≤ 300 ms
Continuous (I _a)	≤ 100 mA	Output function	NPN or PNP
Short-time (I)	≤ 100 mA, (max. load capacity 100 nF)		Make or break (NO or NC)
Minimum operational current (I_m)	0.5 mA		
OFF-state current (I_r)	≤ 100 μA		
Voltage drop (U_d)	≤ 1.6 VDC @ 100 mA		

General Specifications

Environment		Electrical fast transients/burst	(EN 61000-4-4)	± 4 kV
Overvoltage category	III (IEC 60664/60664A, 60947-1)	Surge (EN 61000-4-5)		
Pollution degree	3 (IEC 60664/60664A, 60947-1)	Power-supply		> 1 kV (with 500 Ω)
Degree of protection	IP67 (IEC 60529; EN60947-1) 1, 2, 3, 4, 6, 12, 13 (NEMA types)	Sensor output		> 1 kV (with 500 Ω)
Temperature		Wire conducted disturbances	(EN 61000-4-6)	> 10 Vrms
Operating	-20° to +50°C (-4° to +122°F)	Power-frequency magnetic fields (EN 61000-4-8)		
Storage	-25° to +80°C (-13° to +176°F)	Continuous		> 30 A/m, 38 μ tesla
Rated insulation voltage	50 VDC	Short-time		> 300 A/m, 380 μ tesla
Dielectric test voltage	500 Vac rms (EN60947-1)	Vibration (IEC 60068-2-6)		10 to 150 Hz, 1 mm / 15 g
Rated impulse withstand test	800 V (1.2 / 50 μs) (EN60947-1)	Shock (IEC 60068-2-27)		30 G / 11 ms, 3 pos, 3 neg per axis
ESPE	Type 2	Free fall (IEC 60068-2-31)		2 times from 1 m 100 times from 0.5 m
PFH_d	6 x 10 ⁻⁸ failure per hour (worst case SRP for CS)	Pig-tail connector (-C2)		3-pol micro MATE-N-LOK Series, AMP/TE
Diagnostic coverage	99 % (EN13849-1: 2008)	Housing material		
Performance level	C (EN13849-1: 2008)	Body		M12-Stainless Steel
MTTF_d (worst case full sensor)	345 Years (worst case full receiver) EN ISO 13849-1, SN 29500 412 Years (worst case full emitter) EN ISO 13849-1, SN 29500	Front		PC black
Electrostatic discharge		Connection		
(EN61000-4-2)		Cable		PVC, Emitter: grey / Receiver: black, 5 m, 3 x 0.14 mm ² , Ø 2.9 mm
Contact discharge	> 12 kV	Weight		
Air discharge	> 8 kV	Emitter		80 g
Radiated RF electromagnetic fields (EN 61000-4-3)	> 10 V/m	Receiver		80 g
		CE-marking		EN12445, EN12453, EN12978, EN 60947-5-2
		UL-Approval		UL325 UL508, CSA-C22.2 No.247

Operation Diagram

tv = Power ON delay

Power supply

Target emitter present

Object present


Break (NC) Output ON

Make (NO) Output ON


Mute active ≤ 1.2 VDC

Dimensions

PA12.....

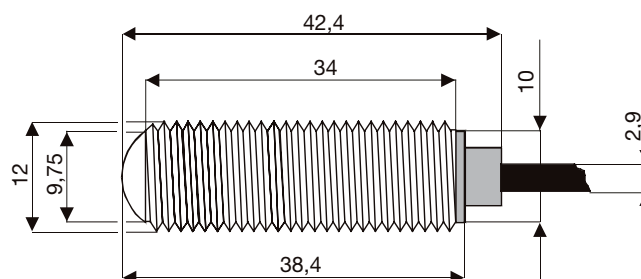


PA12.....-C2 with connector

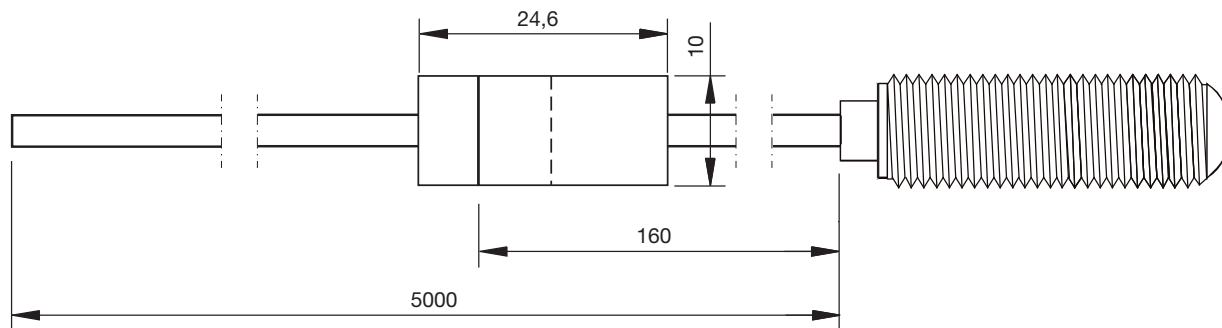





Wiring Diagram

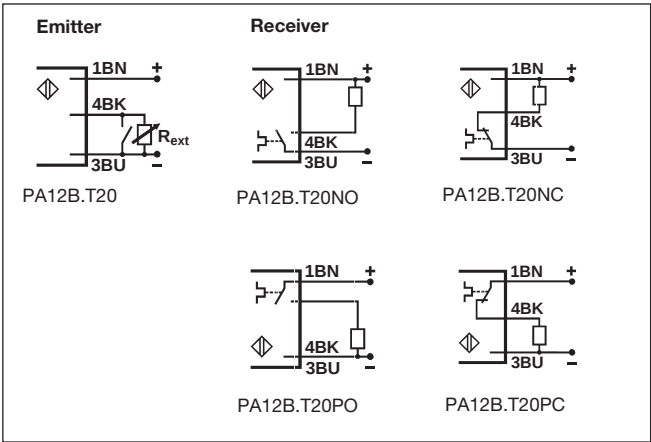


Detection Diagram

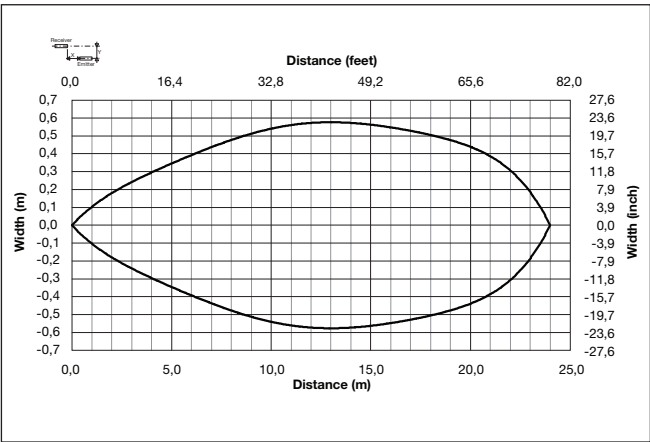



Power adjustment curve

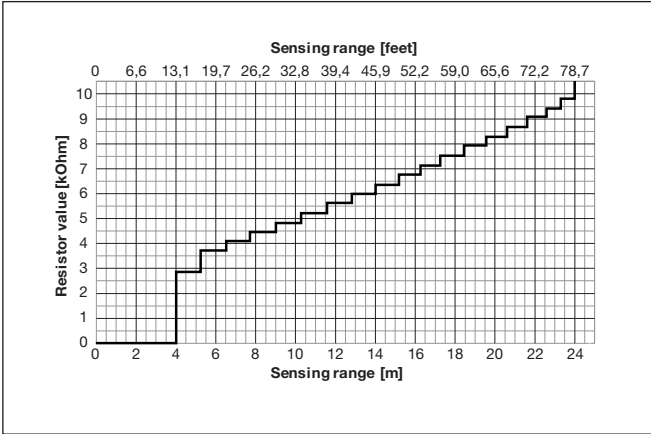





Excess Gain

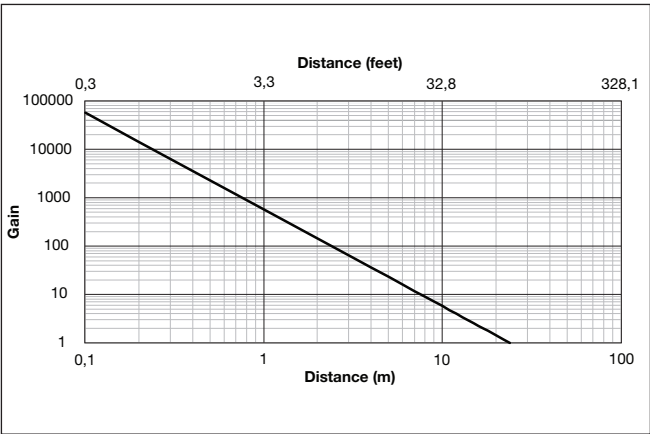

Neighbour Immunity Diagram

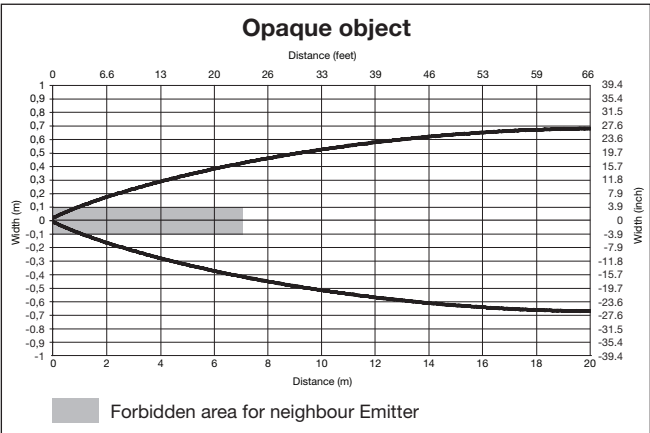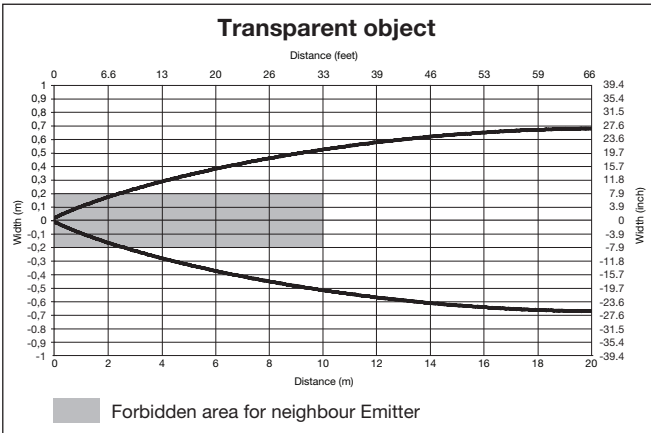

Installation Hints
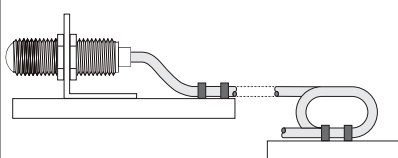
<i>To avoid interference from inductive voltage/current peaks, separate the prox. switch power cables from any other power cables, e.g. motor, contactor or solenoid cables</i>  Incorrect Correct > 100 mm	<i>Relief of cable strain</i>  Incorrect Correct The cable should not be pulled	<i>Protection of the sensing face</i>  A proximity switch should not serve as mechanical stop	<i>Switch mounted on mobile carrier</i>  Any repetitive flexing of the cable should be avoided
---	--	---	---

Delivery Contents

- PA12..
- **Packaging:** plastic bag