

RD-2W Series

2W 2:1 Regulated Single & Dual output



Features

- Wide 2:1 Input Range
- Full SMD Technology
- 1500 VDC Isolation, Up to 3500 VDC
- Continuous Short Circuit Protection
- Efficiency up to 80%
- -40 ~ 85°C Operating Temperature
- Plastic Case Standard, Optional Metal Case





The RD series is a family of cost effective 2W single & dual output DC-DC converters. These converters combine Plastic case in a 24-pin DIL package with high performance features such as 1500 VDC ~ 3500VDC input/output isolation voltage, continuous short circuit protection with automatic restart and tight line / load regulation. Devices are encapsulated using flame retardant resin. Input voltages of 5, 12, 24 and 48 with output voltage of 5, 9, 12, 15, 24, ± 5 , ± 9 , ± 12 , ± 15 and ± 24 Vdc. High performance features include high efficiency operation up to 80% and output voltage accuracy of $\pm 1\%$ maximum.

All specifications typical at $T_a = 25^\circ\text{C}$, nominal input voltage and full load unless otherwise specified

OUTPUT SPECIFICATIONS		PHYSICAL SPECIFICATIONS	
Voltage accuracy	$\pm 1\%$	Case Material	Non-conductive Black Plastic(UL94V-0 rated)
Line regulation	$\pm 0.5\%$		Nickel-coated Copper
Load regulation	$\pm 0.5\%$	Base Material	Non-conductive Black Plastic(UL94V-0 rated)
Ripple & noise(20 MHz bandwidth)(1)	60mV pk-pk	Pin Material	$\varnothing 0.5\text{mm}$ Brass Solder-coated
Short circuit protection	Continuous	Potting Material	Epoxy (UL94V-0 rated)
Temperature coefficient	$\pm 0.02\%/^\circ\text{C}$	Weight	12.5g(Plastic Case)/15.0g(Metal Case)
Capacitor load(2)	See table	Dimensions	1.25"x0.8"x0.4"
INPUT SPECIFICATIONS		ENVIRONMENT SPECIFICATIONS	
Voltage Range	See table	Operating Temperature	$-40^\circ\text{C} \sim 85^\circ\text{C}$ (See Derating Curve)
Max. Input Current	See table	Maximum Case Temperature	100°C
No-Load Input Current	See table	Storage Temperature	$-40^\circ\text{C} \sim 125^\circ\text{C}$
Input Filter	PI Type	Cooling	Nature Convection
Input Reflected Ripple Current(3)	35mA pk-pk		
GENERAL SPECIFICATIONS		ABSOLUTE MAXIMUM RATINGS(4)	
Efficiency	See table, typ	These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.	
I/O Isolation Voltage(3 sec)		Input Voltage(100ms)	
Input/Output	1500~3500Vdc	5 Modes	-0.7~15 Vdc
Metal Case/Input & Output	1000Vdc	12 Modes	-0.7~24 Vdc
I/O Isolation Capacitance	60 pF Typ.	24 Modes	-0.7~40 Vdc
I/O Isolation Resistance	1000M Ohm	48 Modes	-0.7~80 Vdc
Switching Frequency	100~400kHz	Soldering Temperature	260°C
Humidity	95% rel H	(1.5mm from case 10sec.)	
Reliability Calculated MTBF(MIL-HDBK-217 F)	>2.199 Mhrs		
Safety Standard : (designed to meet)	IEC 60950-1		

RD - 2W 2:1 Regulated Single & Dual output

PART NUMBER STRUCTURE

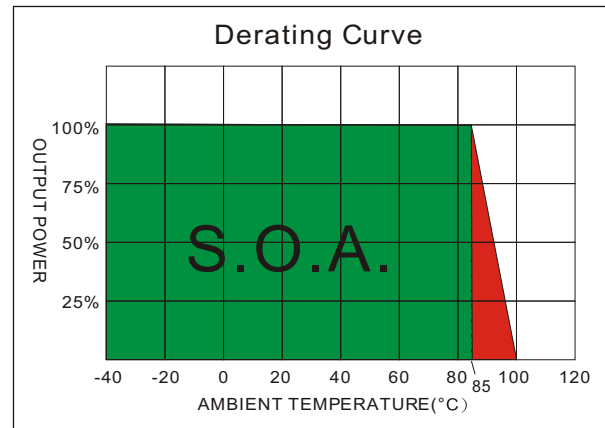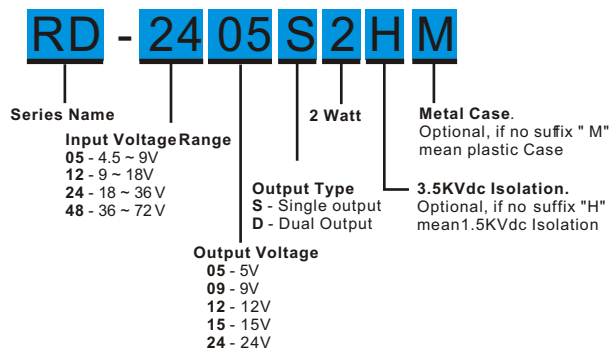

MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL(%)	Capacitor Load(uF)
		No-Load (mA)	Full Load (mA)		Min. load (mA)	Full load (mA)		
RD-0505S2	4.5-9	40	588	5	100	400	68	2200
RD-0509S2	4.5-9	40	571	9	55.5	222	70	470
RD-0512S2	4.5-9	40	571	12	42.8	167	70	470
RD-0515S2	4.5-9	40	571	15	33.3	133	70	470
RD-0524S2	4.5-9	40	579	24	20.8	83	69	220
RD-0505D2	4.5-9	40	588	±5	±50	±200	68	±1000
RD-0509D2	4.5-9	40	571	±9	±27.8	±111	70	±220
RD-0512D2	4.5-9	40	571	±12	±20.8	±83	70	±220
RD-0515D2	4.5-9	40	571	±15	±16.8	±67	70	±220
RD-0524D2	4.5-9	40	579	±24	±10.5	±42	69	±100
RD-1205S2	9-18	20	222	5	100	400	75	2200
RD-1209S2	9-18	20	213	9	55.5	222	78	470
RD-1212S2	9-18	20	213	12	42.8	167	78	470
RD-1215S2	9-18	20	213	15	33.3	133	78	470
RD-1224S2	9-18	20	210	24	20.8	83	79	220
RD-1205D2	9-18	20	225	±5	±50	±200	74	±1000
RD-1209D2	9-18	20	225	±9	±27.8	±111	74	±220
RD-1212D2	9-18	20	219	±12	±20.8	±83	76	±220
RD-1215D2	9-18	20	216	±15	±16.8	±67	77	±220
RD-1224D2	9-18	20	219	±24	±10.5	±42	76	±100
RD-2405S2	18-36	12	106	5	100	400	78	2200
RD-2409S2	18-36	12	104	9	55.5	222	80	470
RD-2412S2	18-36	12	105	12	42.8	167	79	470
RD-2415S2	18-36	12	106	15	33.3	133	78	470
RD-2424S2	18-36	12	104	24	20.8	83	80	220
RD-2405D2	18-36	12	111	±5	±50	±200	75	±1000
RD-2409D2	18-36	12	111	±9	±27.8	±111	75	±220
RD-2412D2	18-36	12	105	±12	±20.8	±83	79	±220
RD-2415D2	18-36	12	105	±15	±16.8	±67	79	±220
RD-2424D2	18-36	12	106	±24	±10.5	±42	78	±100

Suffix "H" means 3.5KVdc isolation

Suffix "M" means Metal Case instead of standard Plastic case

RD - 2W 2:1 Regulated Single & Dual output

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL(%)	Capacitor Load(uF)
		No-Load (mA)	Full Load (mA)		Min. load (mA)	Full load (mA)		
RD-4805S2	36-72	8	55.5	5	100	400	75	2200
RD-4809S2	36-72	8	53	9	55.5	222	78	470
RD-4812S2	36-72	8	52	12	42.8	167	79	470
RD-4815S2	36-72	8	52	15	33.3	133	80	470
RD-4824S2	36-72	8	52	24	20.8	83	80	220
RD-4805D2	36-72	8	56	±5	±50	±200	74	±1000
RD-4809D2	36-72	8	55.5	±9	±27.8	±111	75	±220
RD-4812D2	36-72	8	53	±12	±20.8	±83	78	±220
RD-4815D2	36-72	8	53	±15	±16.8	±67	78	±220
RD-4824D2	36-72	8	53	±24	±10.5	±42	79	±100


Suffix "H" means 3.5KVdc isolation

Suffix "M" means Metal Case instead of standard Plastic case

NOTE

1. Typical value at nominal input voltage and full load.
2. Test by nominal input voltage and constant resistor load.
3. Measured Input reflected ripple current with a simulated source inductance of 12uH.
4. Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.
5. Operation under no-load conditions will not damage these devices, however they may not meet all listed specifications.
6. It's necessary to add minimum capacitor in output for some models, please check single model datasheet for detail value.


MECHANICAL SPECIFICATIONS FOR HIGH ISOLATION MODEL

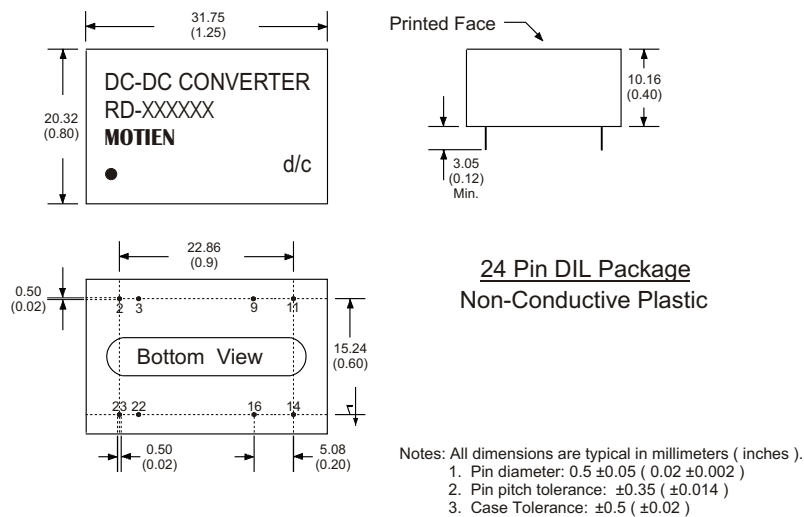

PIN CONNECTIONS		
PIN NUMBER	SINGLE	DUAL
2	-V Input	-V Input
3	-V Input	-V Input
9	N.P.	Common
11	N.C.	-V Output
14	+V Output	+V Output
16	-V Output	Common
22	+V Input	+V Input
23	+V Input	+V Input

(The Pin Connection of high isolation one is the same with normal one.)

MECHANICAL SPECIFICATIONS

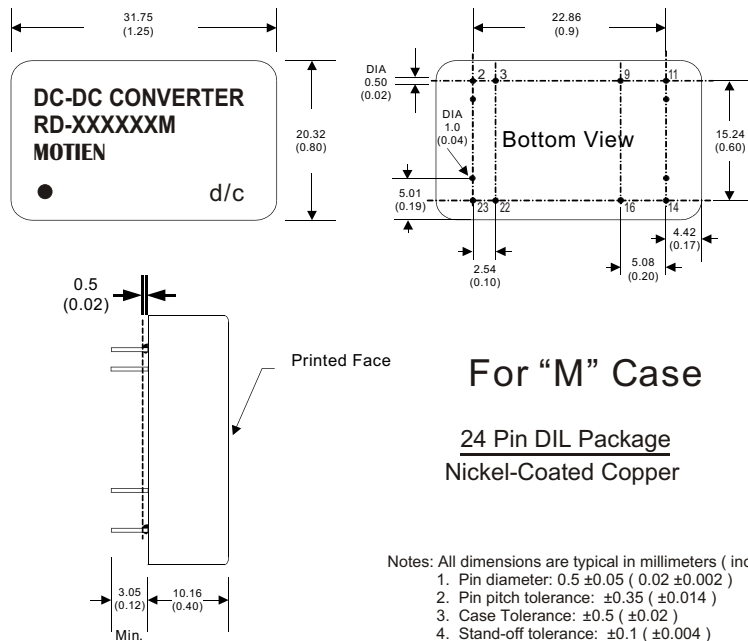

PIN CONNECTIONS		
PIN NUMBER	SINGLE	DUAL
2	-V Input	-V Input
3	-V Input	-V Input
9	N.P.	Common
11	N.C.	-V Output
14	+V Output	+V Output
16	-V Output	Common
22	+V Input	+V Input
23	+V Input	+V Input

(The Pin Connection of high isolation one is the same with normal one.)