



## HPR1XX SERIES

0.75 WATTS  
UNREGULATED

**POWER CONVERTIBLES™**

**DC/DC CONVERTERS**

### MINIATURE SIP, DIP AND SMD PACKAGES

#### FEATURES

- LOW COST
- SINGLE-IN-LINE PACKAGE (SIP)
- INTERNAL INPUT AND OUTPUT FILTERING
- NON-CONDUCTIVE CASE
- HIGH OUTPUT POWER DENSITY:  
10 WATTS/INCH<sup>3</sup>
- EXTENDED TEMPERATURE RANGE:  
-25°C TO +85°C
- HIGH EFFICIENCY: TO 80%

#### DESCRIPTION

The HPR1XX Series uses advanced circuit design and packaging technology to deliver superior reliability and performance. A 170kHz push-pull oscillator is used in the input stage. Beat-frequency oscillation problems are reduced when using the HPR1XX Series with high frequency isolation amplifiers such as the Burr-Brown ISO122.

Reduced parts count and high efficiency add to the reliability of the HPR1XX Series. The high efficiency of the HPR1XX Series means less internal power dissipation, as low as 190mW. With reduced heat

dissipation the HPR1XX Series can operate at higher temperatures with no degradation. In addition, the high efficiency of the HPR1XX Series means the series is able to offer greater than 10 W/inch<sup>3</sup> of output power density. Operation down to no load will not impact the reliability of the series, although a 1mA minimum load is needed to realize published specifications.

The HPR1XX Series provides the user low cost without sacrificing reliability. The use of surface mounted devices and advanced manufacturing technologies make it possible to offer premium performance and low cost.

#### ABSOLUTE MAXIMUM RATINGS

Internal Power Dissipation.....	450mW
Short Circuit Duration.....	Momentary
Lead Temperature (soldering, 10 seconds max).....	+300°C *

\* NOTE: Refer to Reflow Profile for SMD Models.

#### ORDERING INFORMATION

	HPR	1XX	V/W	/H
Device Family				
HPR Indicates DC/DC Converter				
Model Number				
Selected from Table of Electrical Characteristics				
Package Option				
There is "no" package designator for the SIP package				
V = DIP Package				
W = SMD Package				
Screening Option				

Mailing Address: P.O. Box 11400 - Tucson, Arizona 85734 - Tel: (602) 746-1111 - Fax: (602) 628-1602 - Immediate Product Info: (800) 548-6132

# ELECTRICAL SPECIFICATIONS

Specifications typical at  $T_A = +25^{\circ}\text{C}$ , nominal input voltage, rated output current unless otherwise specified.

MODEL	NOMINAL INPUT VOLTAGE (VDC)	RATED OUTPUT VOLTAGE (VDC)	RATED OUTPUT CURRENT (mA)	INPUT CURRENT		REFLECTED RIPPLE CURRENT (mA <sub>p-p</sub> )	EFFICIENCY (%)
				MIN LOAD (mA)	RATED LOAD (mA)		
HPR100	5	5	150	20	216	10	69
HPR102	5	15	50	20	199	5	75
HPR103	5	±5	±75	20	208	5	70
HPR104	5	±12	±30	20	192	5	78
HPR105	5	±15	±25	20	190	5	79
HPR106	12	5	150	10	90	5	69
HPR107	12	12	62	10	81	5	77
HPR108	12	15	50	10	78	5	80
HPR109	12	±5	±75	10	87	5	72
HPR110	12	±12	±30	10	78	5	80
HPR111	12	±15	±25	10	78	5	80
HPR112	15	5	150	8	72	5	69
HPR116	15	±12	±30	8	63	5	80
HPR117	15	±15	±25	8	63	5	80
HPR118	24	5	150	8	44	15	70
HPR120	24	15	50	8	41	15	76
HPR121	24	±5	±75	8	41	15	76
HPR122	24	±12	±30	8	40	15	78
HPR123	24	±15	±25	8	40	15	79

Note: Other input to output voltages may be available. Please contact factory.


## COMMON SPECIFICATIONS

Specifications typical at  $T_A = +25^{\circ}\text{C}$ , nominal input voltage, rated output current unless otherwise specified.


PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
<b>INPUT</b>					
Voltage Range		4.5 10.8 13.5 21.6	5 12 15 24	5.5 13.2 16.5 26.4	VDC VDC VDC VDC
Voltage Rise Time	See Typical Performance Curves & Application Notes: "Capacitive Loading Effects on Start-Up of DC/DC Converters"				
<b>ISOLATION</b>					
Rated Voltage		750			VDC
Test Voltage	60 Hz, 10 Seconds	750			V <sub>pk</sub>
Resistance			10		GΩ
Capacitance			25	100	pF
Leakage Current	$V_{\text{iso}} = 240\text{VAC}$ , 60Hz		2	8.5	μArms
<b>OUTPUT</b>					
Rated Power			750		mW
Voltage Setpoint Accuracy	Rated Load, Nominal $V_{\text{in}}$			±5	%
Ripple & Noise	BW = DC to 10MHz		45		mV <sub>p-p</sub>
	BW = 10Hz to 2MHz		30		mV <sub>rms</sub>
	BW = DC to 10MHz		90		mV <sub>p-p</sub>
HPR103					
	1mA Load, $V_{\text{out}} = 5\text{V}$			7	VDC
	1mA Load, $V_{\text{out}} = 12\text{V}$			15	VDC
Voltage	1mA Load, $V_{\text{out}} = 15\text{V}$			18	VDC
Temperature Coefficient			.01		%/Deg C
<b>REGULATION</b>					
Line Regulation	High Line to Low Line		1		%%Vin
Load Regulation (5V out only)	Rated Load to 1mA Load		10		%
Load Regulation (All other Models)	Rated Load to 1mA Load		3		%
<b>GENERAL</b>					
Switching Frequency			170		kHz
Frequency Change	Over Line and Load		24		%
Package Weight			2		g
MTTF per MIL-HDBK-217, Rev. E *	Circuit Stress Method				
Ground Benign	$T_A = +25^{\circ}\text{C}$		7.9		MHr
Fixed Ground	$T_A = +35^{\circ}\text{C}$		1.9		MHr
Naval Sheltered	$T_A = +35^{\circ}\text{C}$		1.2		MHr
Airborne Uninhabited Fighter	$T_A = +35^{\circ}\text{C}$		300		kHz
<b>TEMPERATURE</b>					
Specification		-25	+25	+85	°C
Operation		-40		+100	°C
Storage		-40		+110	°C

\* For demonstrated MTTF results reference Burr-Brown Reliability Report HPR105 (Literature Number PA697)


## MECHANICAL "SIP" Package/Pinout

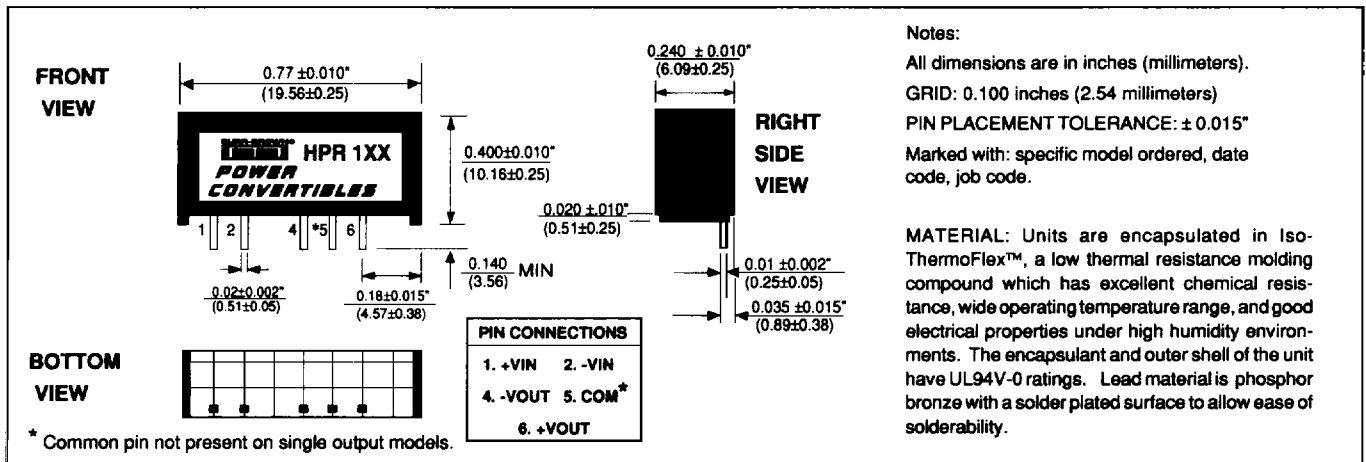


## MECHANICAL Package/Pinout "V" and "W"

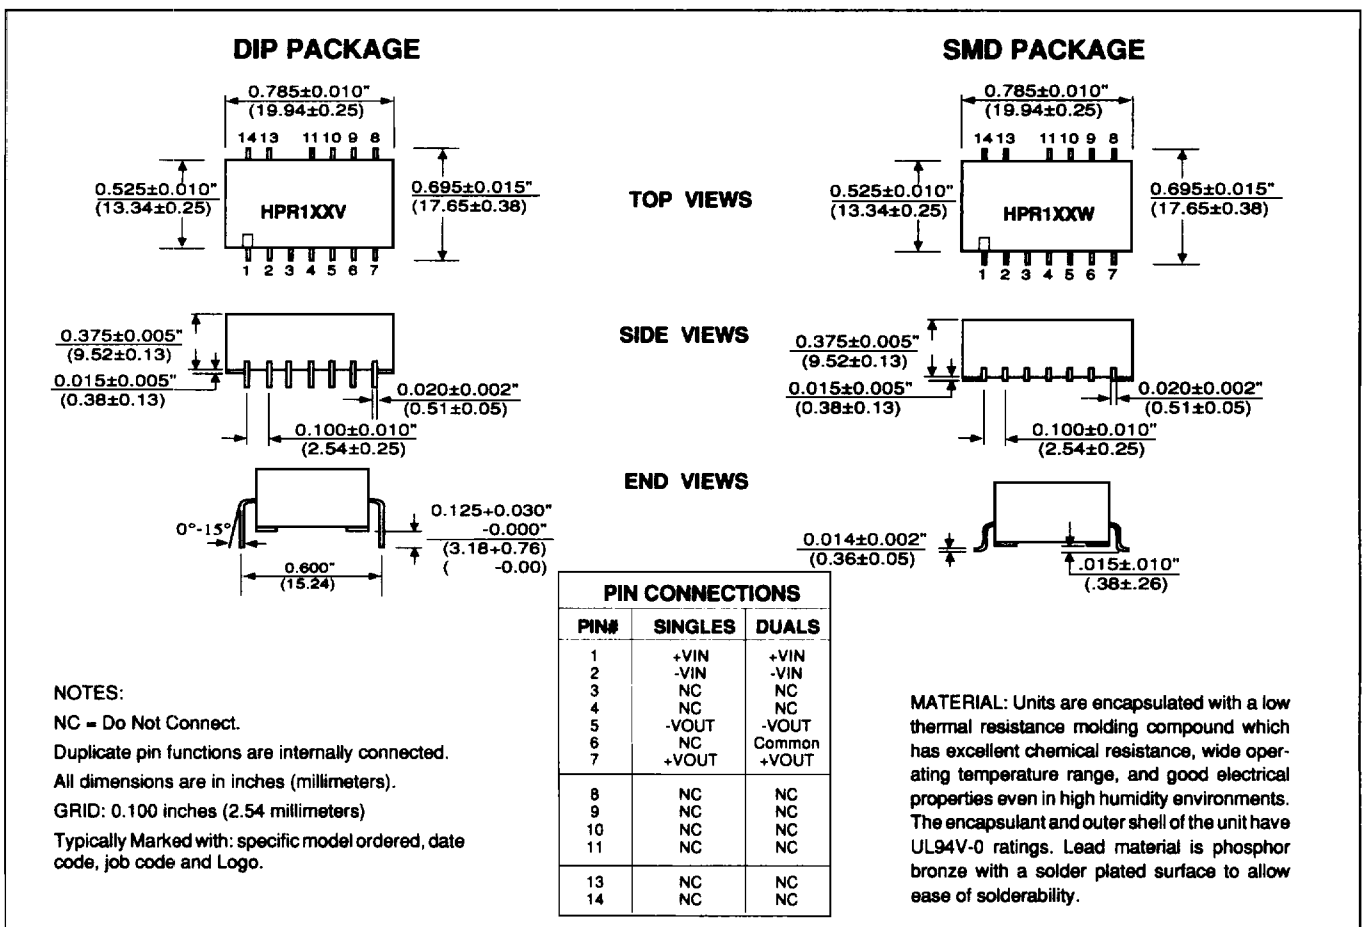

## RECOMMENDED LAND PATTERN




## RECOMMENDED REFLOW PROFILE

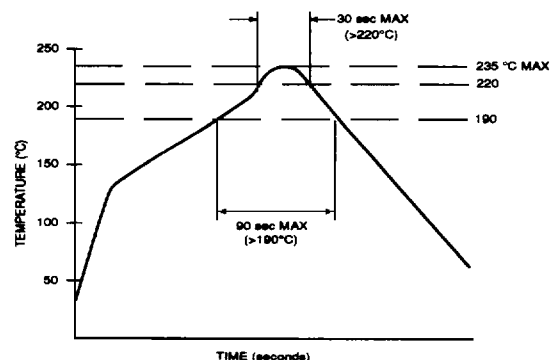


# TYPICAL PERFORMANCE CURVES

Specifications typical at  $T_A = +25^\circ\text{C}$ , nominal input voltage, rated output current unless otherwise specified.

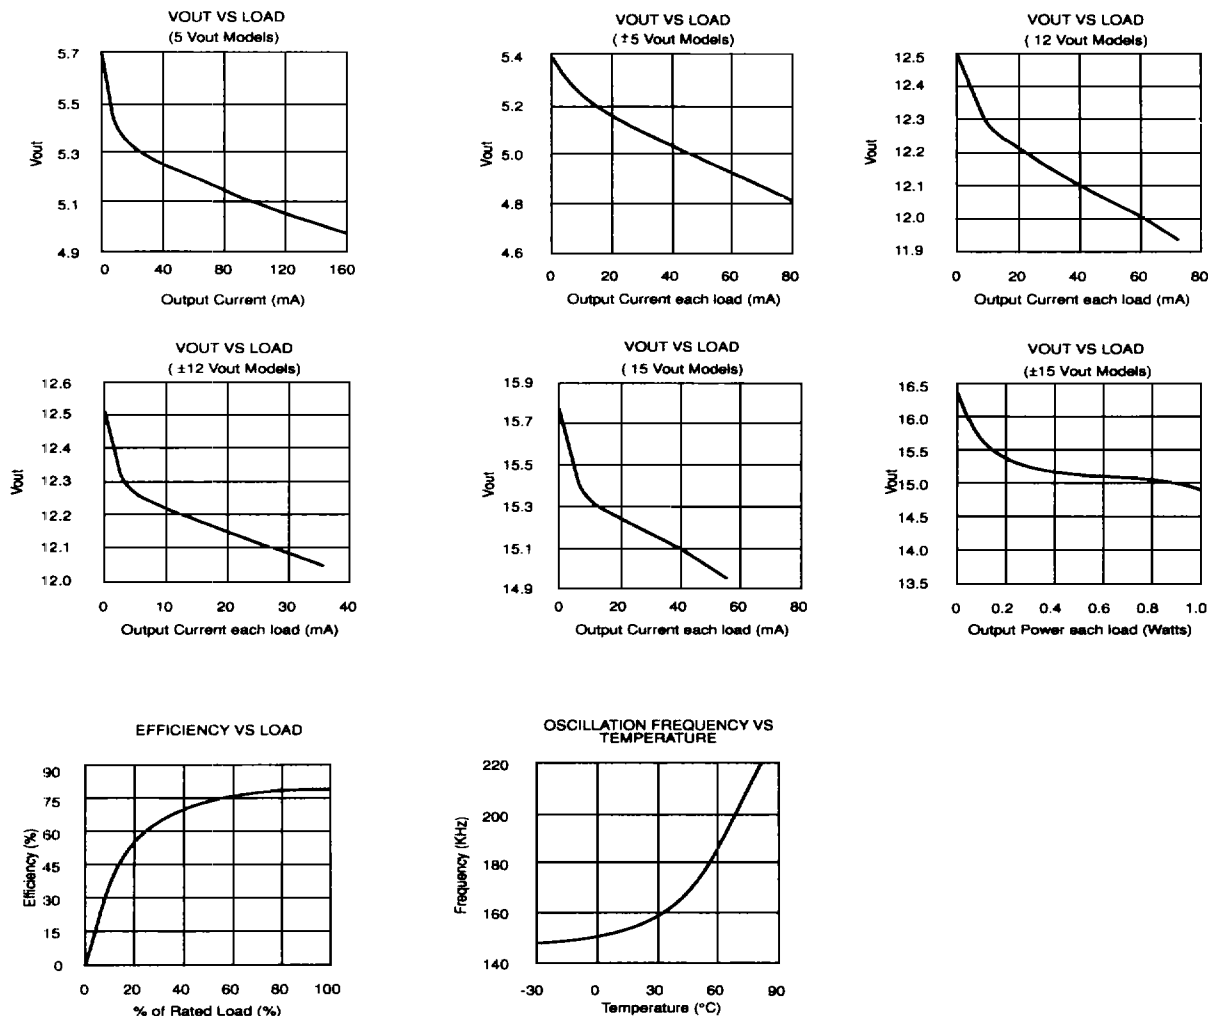

## SAFE OPERATING AREA

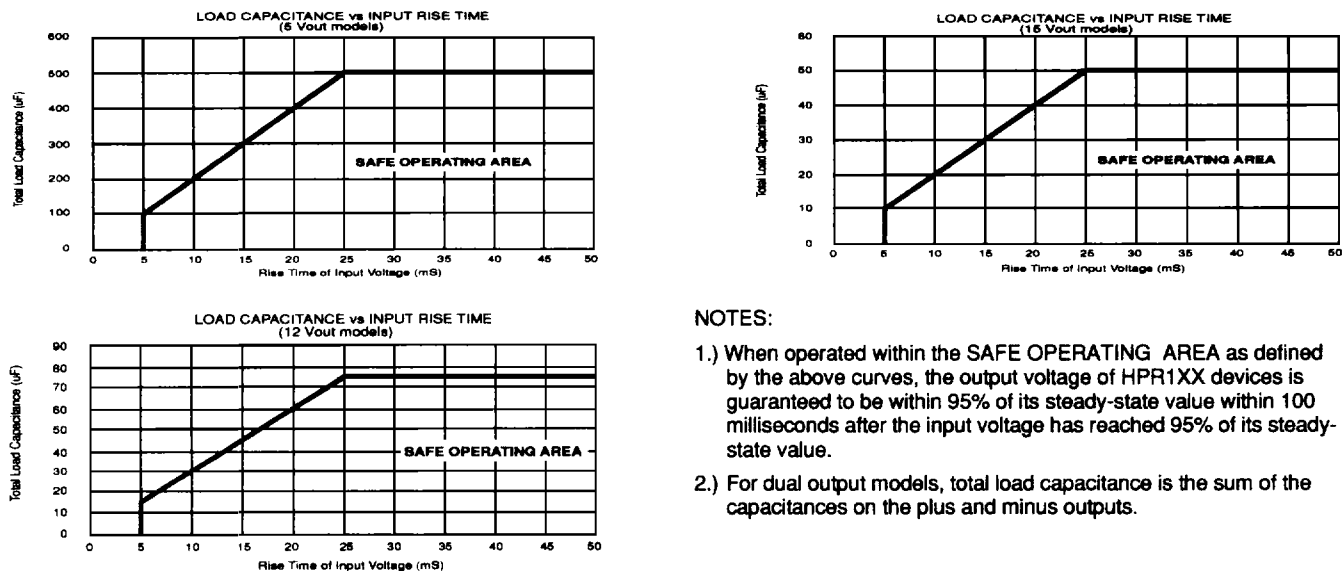

### NOTES:

- 1.) When operated within the SAFE OPERATING AREA as defined by the above curves, the output voltage of HPR1XX devices is guaranteed to be within 95% of its steady-state value within 100 milliseconds after the input voltage has reached 95% of its steady-state value.
- 2.) For dual output models, total load capacitance is the sum of the capacitances on the plus and minus outputs.

The information provided herein is believed to be reliable; however, BURR-BROWN assumes no responsibility for inaccuracies or omissions. BURR-BROWN assumes no responsibility for the use of this information, and all use of such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. BURR-BROWN does not authorize or warrant any BURR-BROWN product for use in life support devices/systems or in aircraft control applications. Power Convertibles, Iso-ThermoFlex and T.E.A.M. Q are trademarks of Power Convertibles Corporation, an affiliate of BURR-BROWN.