

SACB-8/16-L-C GG SCO - Header



1516771
<https://www.phoenixcontact.com/us/products/1516771>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Header, application: Standard, connection method: M12-SPEEDCON-socket Metal, number of slots: 8, number of positions: 5, coding: A, slot assignment: Double, status display: Yes, PNP; master cable connection: Pluggable screw connection, shielding: no

Commercial data

Item number	1516771
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF42
Product key	BF3CCD
Catalog page	Page 265 (C-2-2019)
GTIN	4017918967505
Weight per piece (including packing)	313.8 g
Weight per piece (excluding packing)	303 g
Customs tariff number	85366990
Country of origin	DE

SACB-8/16-L-C GG SCO - Header



1516771

<https://www.phoenixcontact.com/us/products/1516771>

Technical data

Notes

Assembly note	NOTE: Observe the permissible bending radii when routing cables, since the degree of protection may be at risk if the bending forces are too high. Reduce mechanical loads upstream of the connector, e.g., by using cable ties.
Note on application	Unused slots are to be sealed off prior to commissioning. Suitable sealing elements are to be found under "Accessories".

Product properties

Product type	Header with metric measurement slots
Application	Standard
Number of positions	5
Number of slots	8
Coding	A
LED	yes

System properties

Local diagnostics

Monitored function	Supply voltage per module
Optical representation	Green LED


Electrical properties

Max. operating voltage U_{max}	30 V DC
Local diagnostics	Supply voltage per module Green LED
	Status display I/O Yellow LED
Nominal voltage U_N	24 V DC
Rated current, total	10 A
	2x 8 A (For electrical isolation)
Max. current carrying capacity per path	2 A
Current carrying capacity per slot	4 A

Signaling

Status display present	Yes
------------------------	-----

Dimensions

Dimensional drawing	
Width	58 mm

SACB-8/16-L-C GG SCO - Header



1516771

<https://www.phoenixcontact.com/us/products/1516771>

Height	26 mm
Length	153 mm

Material specifications

Material Threaded sleeve	Die-cast zinc
Material Housing	PBT
Material Molding compound	PUR
Flammability rating according to UL 94	V0
Seal material O-ring	NBR
Contact material	Cu alloy
Contact surface material	gold-plated
Contact carrier material	PA
Material of contact, master cable side	CU alloy
Material of the contact carrier on the master cable side	PA 6.6 V0
Material of contact surface, master cable side	gold-plated

Cable/line

Connection method	Pluggable screw connection
-------------------	----------------------------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
	IP67
	IP69K
Ambient temperature (operation)	-30 °C ... 80 °C

Standards and regulations

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101

SACB-8/16-L-C GG SCO - Header


1516771

<https://www.phoenixcontact.com/us/products/1516771>




Drawings

Schematic diagram

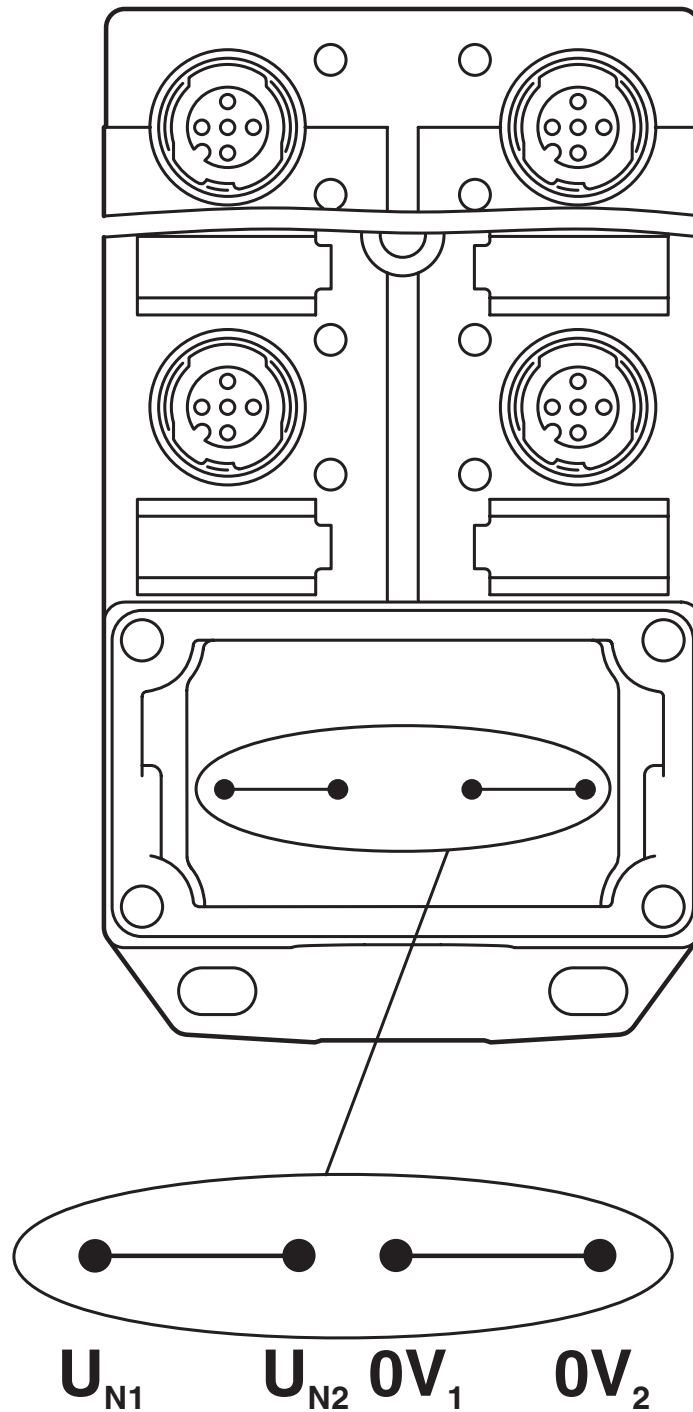


Potential U_{N1} and U_{N2} bridged. Potential assignment: $U_{N1} = U_{N2} =$ slots 1,2,3,4,5,6,7,8.

Circuit diagram

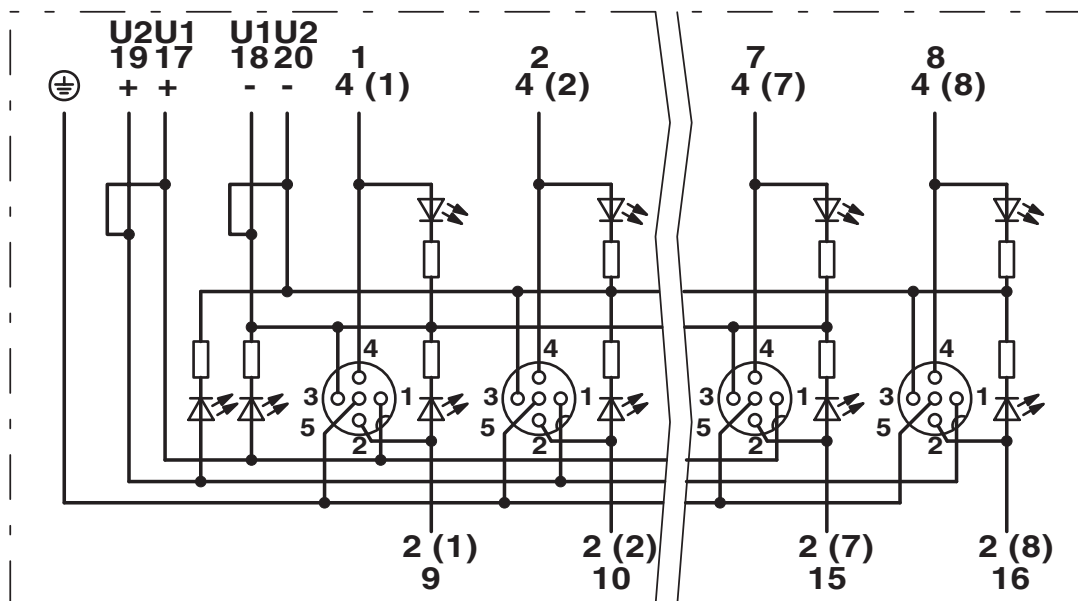

Schematic diagram

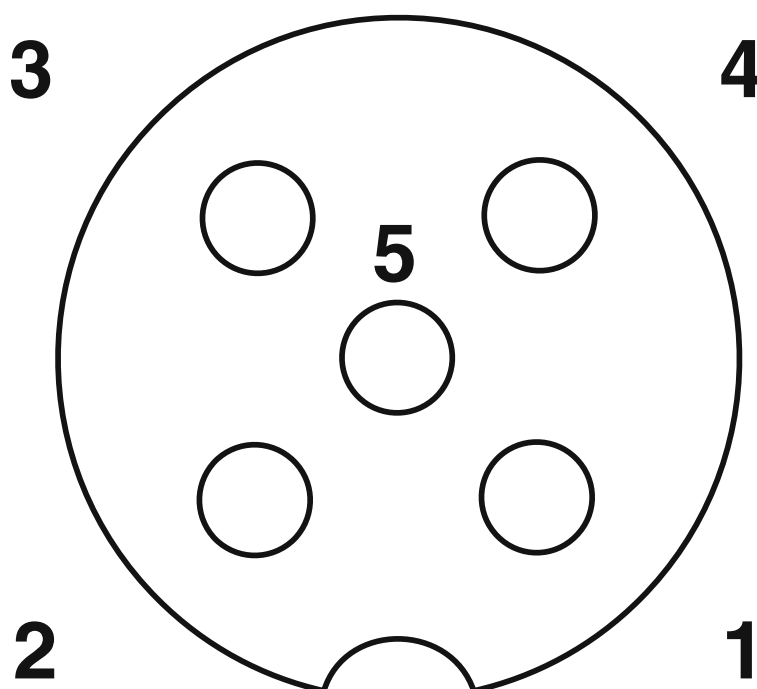


SACB-8/16-L-C GG SCO - Header

1516771

<https://www.phoenixcontact.com/us/products/1516771>



Dimensional drawing

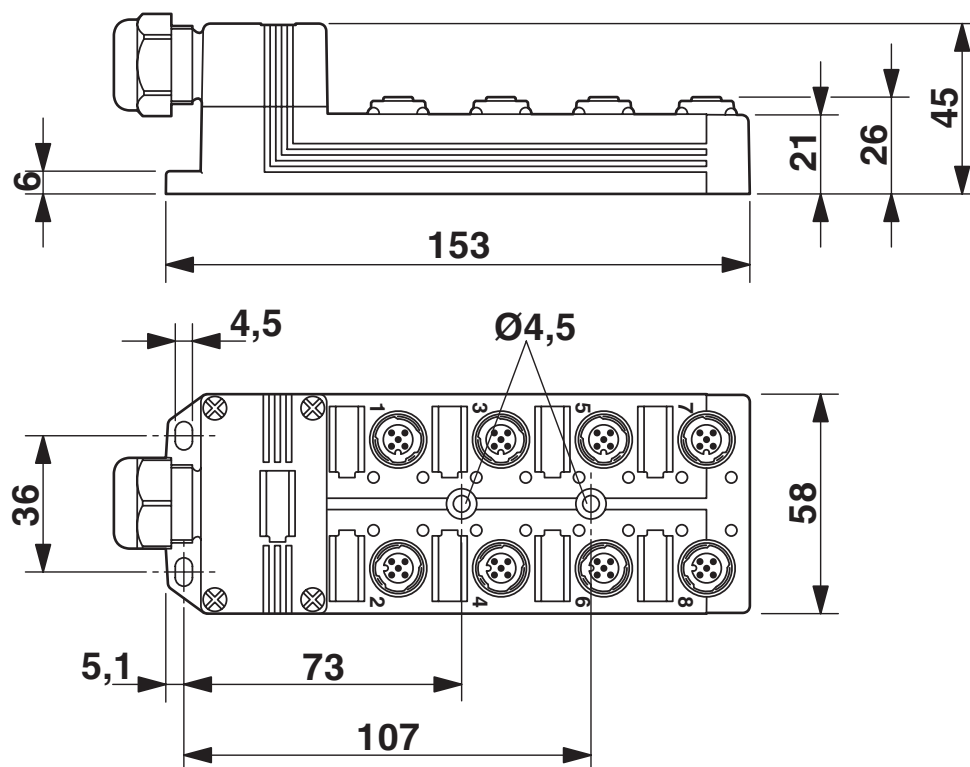


SACB-8/16-L-C GG SCO - Header

1516771

<https://www.phoenixcontact.com/us/products/1516771>



Schematic diagram

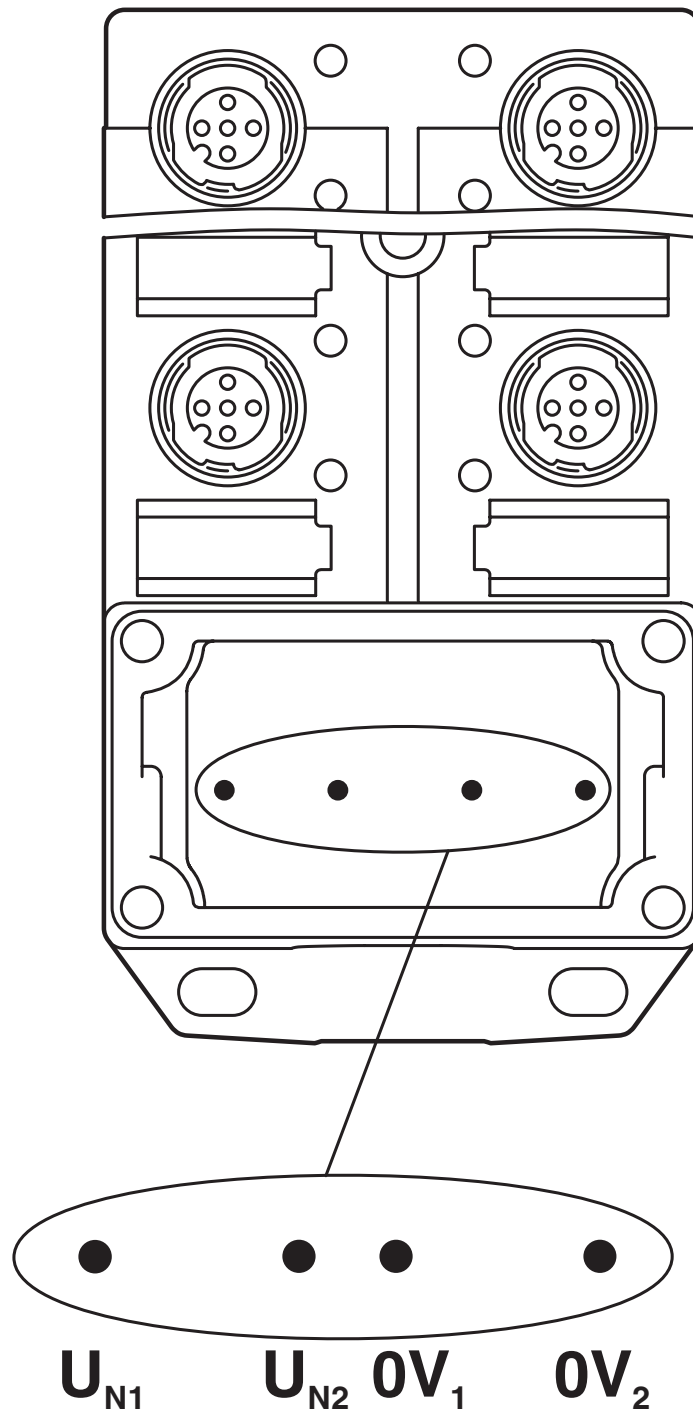

Electrically isolated. Potential assignment: U_{N1} = slots 1,3,5,7 and U_{N2} = slots 2,4,6,8.

SACB-8/16-L-C GG SCO - Header





1516771

<https://www.phoenixcontact.com/us/products/1516771>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1516771>

 cUL Recognized Approval ID: E118976				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	24 V	3 A	-	-

 UL Recognized Approval ID: E118976				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	24 V	3 A	-	-

cULus Recognized				
-------------------------	--	--	--	--

1516771

<https://www.phoenixcontact.com/us/products/1516771>

Classifications

ECLASS

ECLASS-11.0	27440111
ECLASS-12.0	27440111
ECLASS-13.0	27440111

ETIM

ETIM 9.0	EC003558
----------	----------

UNSPSC

UNSPSC 21.0	31251500
-------------	----------



Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%