

**You are here:** [Home](#) > [Products](#) > [Uninterruptible Power Supply \(UPS\)](#) > [Smart-UPS VT](#)

### Smart-UPS VT

**APC Smart-UPS VT 15kVA 208V w/4 Batt. Modules, Start-Up 5X8, Internal Maintenance Bypass**



APC Smart-UPS VT, 12 kW / 15 kVA, Input 208V 3PH / Output 120V, 208V, 208V 3PH , Interface Port DB-9 RS-232, Smart-Slot

**Includes:** Battery modules ship installed, Bolt down brackets, CD with software, Installation guide, Power modules ship installed, Smart UPS signalling RS-232 cable, Start up included, User Manual, Web/SNMP Management Card

★★★★★  
Be the first to [write a review](#)

**SUVT15KF4B4S**  
**DISCONTINUED** : recommended replacement product [SUVT15KF4B4S](#)

 [Email Technical Specifications](#)  
 [Printer Friendly](#)

- Product Category**
- Computer and Peripheral (5)
  - Home UPS (2)
  - Network and Server (3)
  - Data Center and Facility 3 Phase
- > [Symmetra PX](#)
- > [Symmetra MV](#)
- > **Smart-UPS VT**
- > [MGE Galaxy 3500](#)
- > [MGE Galaxy 4000](#)
- > [MGE Galaxy 5000](#)
- > [MGE Galaxy PW](#)
- > [MGE Galaxy 7000](#)
- > [MGE Galaxy 6000](#)
- > [MGE Galaxy 9000](#)
- > [MGE EPS 7000](#)
- > [MGE EPS 8000](#)
- > [MGE Galaxy 300](#)
- > [Power Generation Systems](#)
- UPS Management (7)

[Return to Uninterruptible Power Supply \(UPS\)](#)


[Technical Specifications](#)
[Product Overview](#)
[Documentation](#)
[Options](#)
[Ratings and Reviews](#)

Output	
Output Power Capacity	12 kW / 15 kVA
Max Configurable Power	12 kW / 15 kVA
Nominal Output Voltage	120V,208V,208V 3PH
Output Voltage Note	Configurable for 208 and 220V - 3 Phase
Efficiency at Full Load	93.0%
Output Voltage Distortion	Less than 5% at full load
Output Frequency (sync to mains)	57 - 63 Hz for 60 Hz nominal
Other Output Voltages	220
Crest Factor	Unlimited
Waveform Type	Sine wave
Output Connections	(1) Hard Wire 5-wire (3PH + N + G) (1) Screw Terminals
Bypass	Built-in Maintenance Bypass,Built-in Static Bypass

Input	
Nominal Input Voltage	208V 3PH
Input Frequency	40 - 70 Hz
Input Connections	Hard Wire 5-wire (3PH + N + G)
Input voltage range for main operations	160 - 240V
Other Input Voltages	220
Maximum Input Current	40A
Input Breaker Capacity	60.0 A

Batteries & Runtime	
Battery Type	VRLA
Included Battery Modules	4
Typical recharge time	5 hour(s)
Replacement Battery	<a href="#">SYBT4</a>
RBC™ Quantity	4
Runtime Graph	

Curve	Part Number(s)
A	SUVT15KF4B4S
B	SUVT15KF4B4S + (1)SUVTBXR2B6S
C	SUVT15KF4B4S + (1)SUVTBXR6B6S
D	SUVT15KF4B4S + (2)SUVTBXR6B6S
E	SUVT15KF4B4S + (3)SUVTBXR6B6S

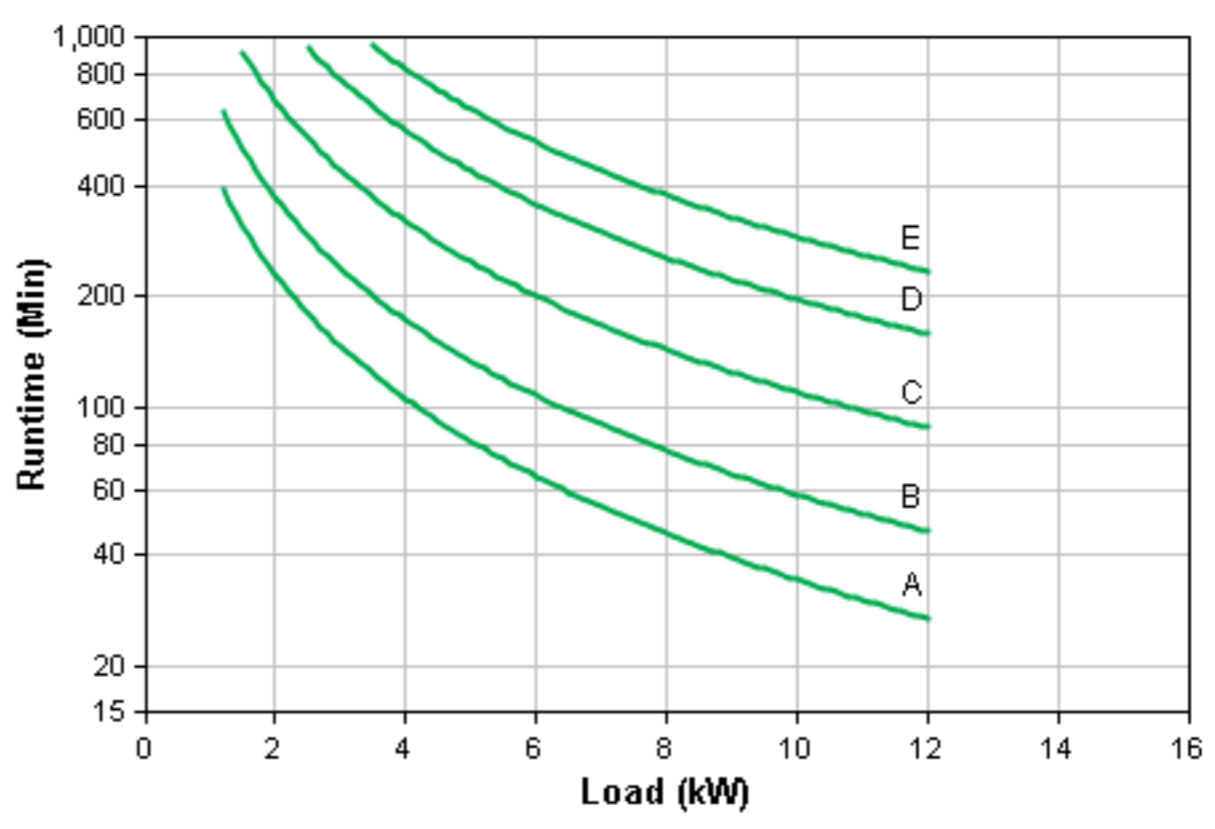

Hover over the line on the graph above to view the runtime at any desired load  
Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

[View Enlarged Graph](#)
[View Runtime Chart](#)

Communications & Management	
Interface Port(s)	DB-9 RS-232,Smart-Slot
Pre-Installed SmartSlot™ Cards	<a href="#">AP9619</a>
Control panel	Multi-function LCD status and control console
Audible Alarm	Audible and visible alarms : configurable delays
Emergency Power Off (EPO)	Yes

Physical	
Maximum Height	1499.00 mm
Maximum Width	523.00 mm
Maximum Depth	925.00 mm
Net Weight	599.10 KG
Shipping Weight	630.00 KG
Shipping Height	1643.00 mm
Shipping Width	650.00 mm
Shipping Depth	1062.00 mm
Color	Black
Units per Pallet	1.00

Environmental	
Operating Environment	0 - 40 °C
Operating Relative Humidity	0 - 95%
Operating Elevation	0-999.9 meters
Storage Temperature	-50 - 40 °C
Storage Relative Humidity	0 - 95%
Storage Elevation	0-15000 meters
Audible noise at 1 meter from surface of unit	54.00 dBA
Online Thermal Dissipation	3276.00 BTU/hr
Protection Class	NEMA 1

Conformance	
Regulatory Approvals	cUL Listed,ISO 14001,ISO 9001,UL 1778
Standard Warranty	1 year repair or replace,Start-Up Service

\*\*The time to recharge to 90% of full battery capacity following a discharge to shutdown using a load rated for 1/2 the full load rating of the UPS.