

TAMURA Corporation of America

Model

PAM250

250 Watts_{max} output power

Power Factor Correction

Single Output

Switch Mode Power Supply




Medical Grade
Certifications

H.A.L.T.
TESTED

Highly
Accelerated
Life
Testing

Electrical Specifications

Input Voltage:	85-132/180-264 VAC, 47-63 Hz, 1 phase
Input Current:	<6A RMS @ 115 VAC @ full load <3A RMS @ 230 VAC @ full load
Inrush Current:	<35A, pk @ 265 VAC @ cold start <75A, pk @ 132 VAC @ cold start
Harmonic Distortion:	Meets EN61000-3-2 for Class A
EMI Filtering:	Meets CISPR 11 and 22 and FCC Part 15 Class B (conducted)
Input Protection:	Internal AC line fuse; 250 VAC, 8A
Surge Withstand:	Meets EN61000-4-5 Level 3
Output Power:	250W with 25CFM air; 130W Convection
Line Regulation:	± 0.3%
Load Regulation:	± 0.5%
PARD:	<1% or 50mV; 20MHz bandwidth
Hold-up Time:	16 ms @ full load (120 VAC)
Output Polarity:	Output is floating
Minimum Load:	0% of rated load
Transient Response:	3% for 25% load change @ 1A/μs; 50% duty cycle 50/60 Hz
Output Rise Time:	<100 ms (10% to 90%)
Current Limit:	105-130% of rated current; Hiccup
Remote Sense:	Compensates for up to 250mV of total cable drop
Remote On/Off:	Optional
Leakage Current:	< 300 μA

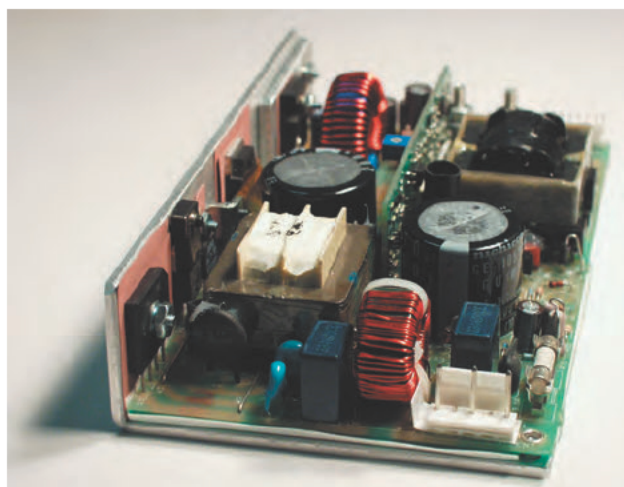

Thermal Shutdown	Standard
DC OK:	Standard; Open Collector
Turn-on Delay:	<1 second after application of AC Input
Stability:	<0.1% for 8 hours after 1/2-hour warm up
Isolation:	>20 MΩ @ 100 VDC between output terminals and chassis ground
AC Power Fail:	TTL _{LOW} logic "0" at least 2 ms before output drops 5%; Open collector
Overvoltage Protect:	Factory set, 125% ±5%, cycle AC to reset
Reverse Voltage:	Output has reverse voltage protection; Reverse current limited to 100% of output rating
Efficiency:	Up to 85%
MTBF:	MIL-STD-HDBK 217E >200,000 hours @ 25°C Highly Accelerated Life Testing

Available Voltage Outputs*

Voltage Codes	Voltages (Volts)	Continuous Current (Amps)
-4	12.0	21
-5	15.0	17
-6	24.0	10.5
-7	28.0	9.0
-8	36.0	7.2
-9	48.0	5.5

* Consult factory for other voltages and OEM quantities.

Note: Standard models are shown **bold**

PART # STRUCTURE:

MODEL - **VOLTAGE CODE** - **OPTION CODES** (back)

- **V1** -

PAM250 - **X** - **ABC....**

Example: Part Number **PAM250-6-OR**= 250W Power Factor Corrected, 24V @ 10.5A with an OR-ring Diode and Remote On/Off.
CLICK HERE TO SEE THE PAM250 CODE TABLE AND AVAILABLE OPTIONS.

TAMURA Corporation of America

Model

PAM250

Options (code)

12V@0.5A Aux./Fan Drive (A)	Droop Current Share $\pm 10\%$ (B)
Fan Assembly (C)	DC OK Invert (E)
PF Invert (F)	Field-Configurable (G)
Single Wire Current Share $\pm 5\%$ (I)	Square Current Limit (J)
Molex Connector (K)	Metric Mounting (M)
OR-ing Diode (O)	Remote On/Off (R)
Remote On/Off Invert (S)	

Certifications

NRTL*** Recognition to UL60601-1
 CSA C22.2 No. 601.1
 BAUART Certification to EN60601-1
 CB Test Report in Accordance with IEC60601-1
 CE Declaration to Low Voltage Directive 2006/95/EC

*** Nationally Recognized Test Laboratory




Compliance

EN61000-4-5 Level 3	EN61000-4-2 Level 2
EN61000-3-2 for Class A	EN61000-4-2 Level 3 (Air Only)
EN61000-4-4 Level 3	EN61000-4-11
CISPR 11 and 22 FCC Part 15 Class B (conducted)	

Physical Specifications

Dimensions: (HxWxL)	1.5" x 4.0" x 7"
Operating Temp:	0 to 70°C; rated power to 50°C derate linearly to 50% at 70°C.
Relative Humidity:	5% to 90%, non-condensing
Storage:	-50 to 85°C/20-90% RH
Altitude:	6531 40,000' storage

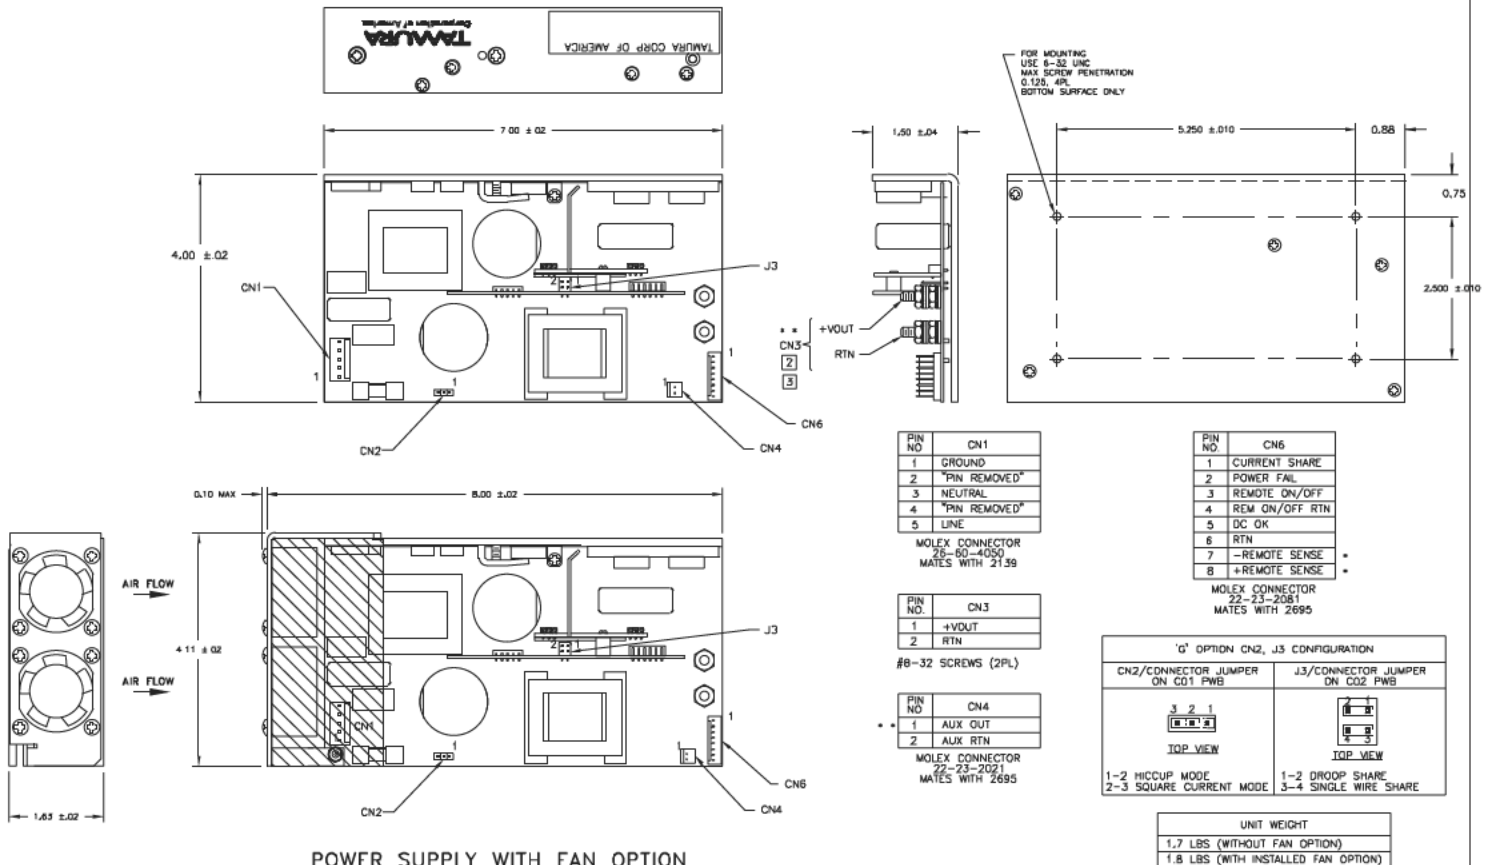

- [3] OPTIONAL--MOLEX CONNECTOR (OPTION 'K'--LIMITED TO 7A) MAY BE SPECIFIED FOR CN3 INSTEAD OF STANDARD OUTPUT STUDS.
 [2] DO NOT EXCEED 17 INCH-LBS (MAX TORQUE) WHEN TIGHTENING TOP NUTS ON OUTPUT STUDS.
 1. FOR CLARITY NOT ALL ITEMS ARE SHOWN IN EACH VIEW.

- * **WARNING:** DAMAGE WILL OCCUR IF REMOTE SENSE LEADS (CN6-7 & CN6-8) ARE REVERSED OR USED WITH LOAD DISCONNECTED FROM OUTPUT (CN3).
 ** **NOTE:** FOR PROPER REGULATION OF AUXILIARY OUTPUT, APPLY AT LEAST 10% OF RATED LOAD TO VOUT.

© Copyright 2011 TAMURA CORPORATION OF AMERICA. Specifications subject to change without notice.



TAMURA CORPORATION OF AMERICA
 1040 South Andreasen Drive, STE. 100 Escondido, CA 92029-1951
 (951) 699-1270 / Fax: (951) 676-9482
 (800) 472-6624 www.tamuracorp.com



FM 32227