

DC-DC Converters

**POWER
SOLVE**

TDR2WISM Series, 2 Watt

www.powersolve.co.uk

Features

- Compact design in SMD package
- Ultra wide 4:1 input range
- Fully regulated outputs
- No minimum load requirement
- I/O isolation 1500VDC
- Operating temperature range -40°C to +85°C
- Short circuit protection
- Remote ON/OFF



Electrical Specification


Short Circuit Protection	continuous, automatic recovery
Operating Temperature Range	-40°C to +85°C (without derating)
I/O Isolation test voltage	1500VDC
Safety Approvals	cUL/UL 60950-1, IEC/EN 60950-1
Casing	epoxy moulded (UL94V-0 rated)
Remote ON/OFF	shutdown input for low current (2.5mA) in standby operation

Output Voltage and Current Ratings

MODEL	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	RIPPLE & NOISE	LINE REG.	LOAD REG.	EFF. (typ.)
TDR2-1211WISM	4.5 - 18VDC	5VDC	400mA	30mV pk-pk max.	0.2%	1.0%	81%
TDR2-1212WISM		12VDC	167mA	30mV pk-pk max.	0.2%	1.0%	81%
TDR2-1213WISM		15VDC	134mA	30mV pk-pk max.	0.2%	1.0%	81%
TDR2-1222WISM		±12VDC	±83mA	30mV pk-pk max.	0.2%	1.0%	81%
TDR2-1223WISM		±15VDC	±67mA	30mV pk-pk max.	0.2%	1.0%	81%
TDR2-2411WISM	9 - 36VDC	5VDC	400mA	30mV pk-pk max.	0.2%	1.0%	81%
TDR2-2412WISM		12VDC	167mA	30mV pk-pk max.	0.2%	1.0%	81%
TDR2-2413WISM		15VDC	134mA	30mV pk-pk max.	0.2%	1.0%	81%
TDR2-2422WISM		±12VDC	±83mA	30mV pk-pk max.	0.2%	1.0%	81%
TDR2-2423WISM		±15VDC	±67mA	30mV pk-pk max.	0.2%	1.0%	81%
TDR2-4811WISM	18 - 75VDC	5VDC	400mA	30mV pk-pk max.	0.2%	1.0%	81%
TDR2-4812WISM		12VDC	167mA	30mV pk-pk max.	0.2%	1.0%	81%
TDR2-4813WISM		15VDC	134mA	30mV pk-pk max.	0.2%	1.0%	81%
TDR2-4822WISM		±12VDC	±83mA	30mV pk-pk max.	0.2%	1.0%	81%
TDR2-4823WISM		±15VDC	±67mA	30mV pk-pk max.	0.2%	1.0%	81%

Mechanical and Connection Details

Dimensions in mm (inches)

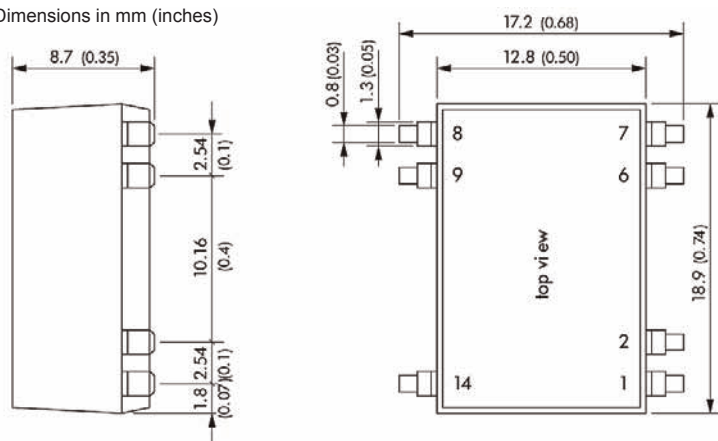

Pin	Single Output	Dual Output
1	-Vin (GND)	-Vin (GND)
2	Remote ON/OFF	Remote ON/OFF
6	No Conn.	Common
7	No Conn.	-Vout
8	+Vout	+Vout
9	-Vout	Common
14	+Vin (Vcc)	+Vin (Vcc)