


16.2kW 208V 3PH Monitored Per-Outlet PDU - LX Interface, Gigabit, 18 Outlets, IEC 309 60A Blue Input, LCD, 1.8 m Cord, 0U 1.8 m Height, TAA

MODEL NUMBER: PDU3EVNR6G60A

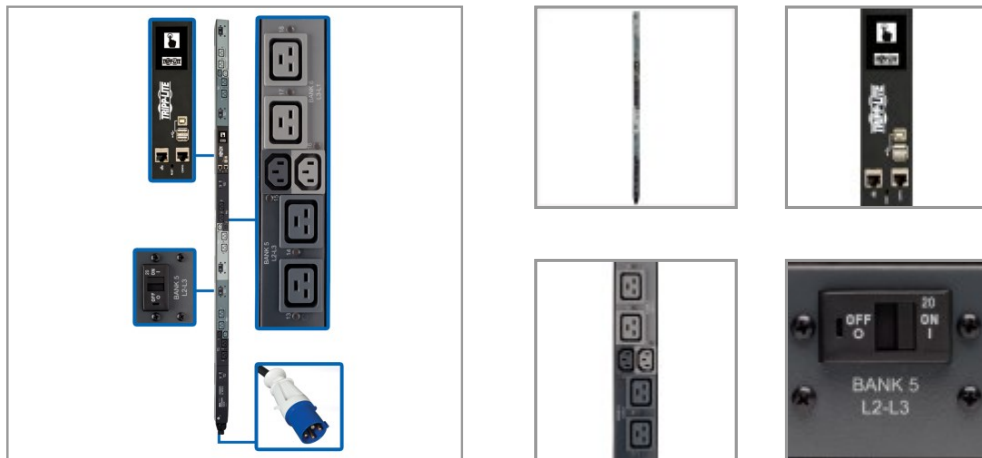

3-phase PDU allows real-time remote monitoring of individual outlets to help you track power consumption trends and detect problems early.

Features

16.2kW 3-Phase PDU Distributes and Monitors Network-Grade Power This monitored PDU provides real-time remote monitoring of voltage and load levels via its built-in network interface. Ideal for your data center, computer room or high-density network closet, the PDU3EVNR6G60A features 12 C19 and six C13 208/240V outlets in three breakered load banks, which distribute AC power to rack equipment. Plug-lock insert sleeves are included to prevent equipment cables from becoming accidentally dislodged.

Monitored Per-Outlet PDU Lets You Keep Track of Power Consumption in Real Time Not only can you remotely monitor voltage and frequency, but the PDU3EVNR6G60A also allows metering of per-phase input current, as well as output current per bank and per outlet. Banks can be individually monitored to ensure proper load balance and prevent downtime. Monitoring each outlet allows you to study power consumption trends for each connected device. This helps you detect hardware problems and network traffic bottlenecks, as well as compare power usage among various devices.

Built-In GbE-Capable Network Management Card Allows Remote Access 24/7 The built-in WEBCARDLX with the latest version of PowerAlert Device Manager firmware (PADM20) provides enhanced remote management capabilities, including customizable dashboard graphs to fit user preferences. The PADM20 upgrade and PowerAlert Element Manager (PAEM) software form a powerful tool for expanding maintenance functions in large installations, including firmware update checks and backup and restoration of device configurations.

Color Touchscreen LCD Gives You Important Data at a Glance An easy-to-navigate color touchscreen LCD reports network data, including IP address, input current level per phase, and output current per load bank and per outlet with $\pm 1\%$ billing-grade accuracy. It also generates a unique QR code to allow read-only access to the PDU via PowerAlert® Device Manager. If an EnviroSense2 module is connected, the LCD also displays status and environmental data, including temperature and humidity.

Easy to Install Vertically in an EIA-Standard 19 in. Rack The 70-inch 0U rack PDU (rPDU) mounts vertically using the included toolless mounting buttons or the included rack-mounting brackets. Spare buttons are also included. Use the included PDUMVROTATEBRKT kit to install the PDU with outlets facing the rear for better airflow or equipment access. A six-foot cord with an IEC 309 60A Blue 208V input connects the PDU to a compatible AC power source, generator or protected UPS.

Highlights

- Advanced remote capabilities include outlet-level current monitoring in real time
- 12 C19 and 6 C13 208/240V outlets distribute AC power to connected equipment
- Pre-installed GbE-capable WEBCARDLX with latest version of PADM20 for enhanced remote management
- Color touchscreen LCD provides current levels, environmental data and network info
- Installs in 0U of rack space in standard 19 in. racks using included mounting hardware

Applications

- Power mission-critical rack equipment in a data center, computer room or high-density network closet in a government, commercial or industrial facility
- Monitor power loads from various computers, switches, servers and other networking equipment
- Study power consumption trends over time for equipment connected to each individual outlet

Package Includes

- PDU3EVNR6G60A 16.2kW 3-Phase Monitored Per-Outlet PDU
- Built-in LX Platform interface
- Configuration cable
- (18) Plug-lock insert sleeves
- Rack-mounting hardware
- Spare mounting buttons
- PDUMVROTATEBRKT mounting bracket accessory
- Owner's manual



Powering Business Worldwide

TRIPP LITE
SERIES

TAA-Compliant for GSA Schedule PurchasesThe PDU3EVNR6G60A is compliant with the Federal Trade Agreements Act (TAA), which makes it eligible for GSA (General Services Administration) Schedule and other federal procurement contracts.

Specifications

| OVERVIEW | |
|-----------------------------------|--|
| UPC Code | 037332242242 |
| PDU Type | Monitored |
| INPUT | |
| Input Phase | 3-Phase |
| PDU Input Voltage | 208 |
| Recommended Electrical Service | Three-phase 60A 208V service |
| Maximum Input Amps | 45 |
| Maximum Input Amps Details | Agency de-rated to 45A continuous |
| PDU Plug Type | (1) IEC-60309 60A BLUE (3P+E) |
| Input Cord Length (ft.) | 6 |
| Input Cord Length (m) | 1.83 |
| OUTPUT | |
| Output Capacity Details | 16.2kW (208V) total capacity; 26A max per output phase (L1-L2, L2-L3, L3-L1); 20A max per breakered outlet bank; 16A max per C19 outlet; 12A max per C13 outlet |
| Frequency Compatibility | 50 / 60 Hz |
| Output Receptacles | (6) C13; (12) C19 |
| Output Nominal Voltage | 208V |
| Overload Protection | Six 20A circuit breakers, one per output load bank |
| USER INTERFACE, ALERTS & CONTROLS | |
| Reported Load Segments | Reports input current per phase (L1, L2, L3) and output current for each breakered load bank (26A combined max per banks B1+B4, B2+B5, B3+B6); 20A Max per banks B1-B6); Outlets are color-coded and labeled for phase and load bank identification; L1-L2 feeds black outlets (B1 & B4); L2-L3 feeds dark-gray outlets (B2 & B5); L3-L1 feeds light-gray outlets (B3 & B6) |
| Front Panel LCD Display | Touchscreen LCD reports NETWORK DATA (IP address, Subnet Mask, Gateway, MAC Address, Device Name, Model, Serial Number), INPUT PHASE DATA (Amperage, Wattage, Voltage per phase, plus Unbalance percentage), LOAD BANK DATA (Amperage, Wattage, Voltage per load bank, plus total PDU output in watts), OUTLET DATA (Amperage, Wattage per outlet), CONFIGURATION DATA (Listing of current configuration settings), ENVIRONMENTAL DATA (Reports data and status of E2 sensor modules; Sensor options are available for temperature and humidity, plus input and output dry contacts), MOBILE ACCESS (Generates a unique QR code to view reported PDU details on a mobile device) |
| Switches | LX Platform Interface: Recessed reset switch for interface reboot and factory reset |
| LED Indicators | One LED for each output receptacle offers power availability information: GREEN (Power ON, load bank capacity <80%), YELLOW (Power ON, load bank capacity >80%), RED (Undervoltage), RED FLASHING (Power OFF/breaker trip), LED OFF (Power OFF); Network Interface LEDs report Network Activity (Green, Flashes for network activity), Link/Network Speed (Yellow, On steady for any speed). |



Powering Business Worldwide

TRIPP LITE
SERIES

| | |
|--------------------------------------|--|
| Current Measurement Accuracy (Amps) | +/-1% |
| Voltage Measurement Accuracy (Volts) | +/-1% |
| Power Measurement Accuracy (Watts) | +/-1% |
| SURGE / NOISE SUPPRESSION | |
| Automatic Shut-Off | No |
| PHYSICAL | |
| Material of Construction | Metal |
| Rack Height | 0U |
| Form Factors Supported | Vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks |
| PDU Form Factor | Vertical (0U) |
| Shipping Dimensions (hwd / in.) | 6.89 x 9.65 x 75.87 |
| Shipping Weight (kg) | 12.28 |
| Unit Dimensions (hwd / in.) | 70.000 x 2.170 x 2.860 |
| Unit Dimensions (hwd / cm) | 177.8 x 5.51 x 7.26 |
| Unit Weight (lbs.) | 14.13 |
| Unit Weight (kg) | 6.41 |
| ENVIRONMENTAL | |
| Operating Temperature Range | 32° to 104°F (0° to 40°C) |
| Storage Temperature Range | -22° to 140°F (-30° to 60°C) |
| Relative Humidity | 5% to 95% non-condensing |
| Operating Elevation | 0-10000 ft. (0-3000 m) |
| COMMUNICATIONS | |
| PowerAlert Software | LX Platform Interface: PowerAlert Device Manager |
| Communications Cable | USB B-to-USB A Configuration/Console Access cable |
| Network Monitoring Port | RJ45 Network port, RJ45 Config/Console Access port; 2x USB A ports supports a variety of Envirosense2 environmental and control modules. See Accessories>Management Hardware section for more information about these modules. USB B port (Configuration & Console Access) |
| SNMP Compatibility | SNMP V1, V2c, V3 |
| Network Compatibility | 10 Mbps; 100 Mbps (Fast Ethernet); 1 Gbps (Gigabit) |
| Communications Interface | Pre-installed network card; RS-232; USB |
| FEATURES & SPECIFICATIONS | |
| High Availability PDU Features | Remote Network Notifications |



Powering Business Worldwide

TRIPP LITE
SERIES

| STANDARDS & COMPLIANCE | |
|-------------------------------------|--|
| Product Certifications | CAN/CSA-C22.2 No. 60950-1 (Canada); NOM (Mexico); UL 60950-1 |
| Product Compliance | RoHS; FCC Part 15 Class A (USA); Trade Agreements Act (TAA) |
| WARRANTY & SUPPORT | |
| Product Warranty Period (Worldwide) | 2-year limited warranty |

1000 Eaton Boulevard
Cleveland, OH 44122
United States
<https://tripplite.eaton.com>

© 2025 Eaton. All Rights Reserved.
Eaton is a registered trademark. All other trademarks
are the property of their respective owners.