

UIA(UIB) 324 24W Series For Portable Switching AC/DC Adaptor

MODEL	INPUT	OUTPUT
UIA(UIB)324-05	AC100V~240V (50/60Hz)	5.0V 4.0A
UIA(UIB)324-0630		6.0V 3.0A
UIA(UIB)324-06		6.0V 3.8A
UIA(UIB)324-07		7.0V 3.4A
UIA(UIB)324-09		9.0V 2.6A
UIA(UIB)324-12		12V 2.0A
UIA(UIB)324-15		15V 1.6A
UIA(UIB)324-24		24V 1.0A

*** UIA : IEC320 C8 / 2PIN

*** UIB : IEC320 C6 / 3PIN

FEATURE:


- Constant Voltage Mode
- High Power Output
- Mini Size and Easy Portable
- Desktop IEC320/2 or 3 pin Inlet

APPLICATION:

- LCD Monitor
- Note Book PC
- Communication Terminals
- Wireless Lan Station
- Hard Disk
- Portable Device or Machine

INPUT/OUTPUT SPECIFICATIONS:

Input Voltage:	AC100V-240V,50/60Hz
Range Voltage:	AC 90V-264V,47/63Hz
Output Power:	24W
Output Voltage:	5V-24V
Over Current Protection:	120% Min
Over Voltage Protection:	120% Min
Short Protection:	Auto Recovery
Load Regulation:	±5%

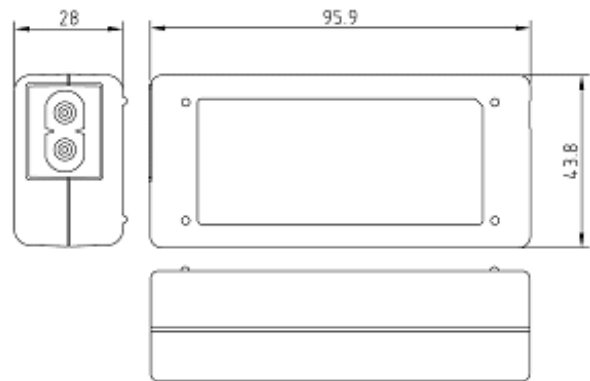

DIMENSION: L*W*H:95.9*43.8*28

GENERAL SPECIFICATIONS:

Operating Temperature:	0 ~ 40℃
Operating Relative Humidity:	5 ~ 95%RH
Storage Temperature:	-20 ~ 85 °C
Withstanding Voltage:	AC 3000V/Min (between Input & Output),10mA(Max.)
Insulation Resistance:	DC500V 100MΩ(Min.) (between Input & Output)
Efficiency:	70% Min

SAFETY:

- PSE-MARK,CB,UL/CUL,CE

UNIFIVE CO.,LTD.

3-33-14 Nakakasai, Edogawa-ku Tokyo Japan 134-0083

TEL : +81-3-5605-3222 FAX : +81-3-5605-3220

UNIFIVE TECHNOLOGY CO.,LTD.

4F., No.269, Siangyang Rd., Fongyuan City, Taichung County 420, Taiwan (R.O.C.)

TEL : +886-4-2523-0886 FAX : + 886-4-2523-0913

Copyright UNIFIVE TECHNOLOGY CO.,LTD. [Taiwan Products](#), [B2BChinaSources](#), [B2BManufactures](#)