


I.T & A.V. AC/DC Adapter

UI(UIT)118/UI(UIT)318 18W Series For Portable Switching AC/DC Adaptor

MODEL	INPUT	OUTPUT
UI(UIT)X18-03	AC100V~120V (50/60Hz)	3.0V 3.0A
UI(UIT)X18-33		3.3V 3.0A
UI(UIT)X18-0526		5.0V 2.6A
UI(UIT)X18-05		5.0V 3.0A
UI(UIT)X18-06		6.0V 2.8A
UI(UIT)X18-09	AC100V~240V (50/60Hz)	9.0V 2.0A
UI(UIT)X18-12		12V 1.5A
UI(UIT)X18-15		15V 1.2A
UI(UIT)X18-24		24V 0.75A
UI(UIT)X18-48		48V 0.4A

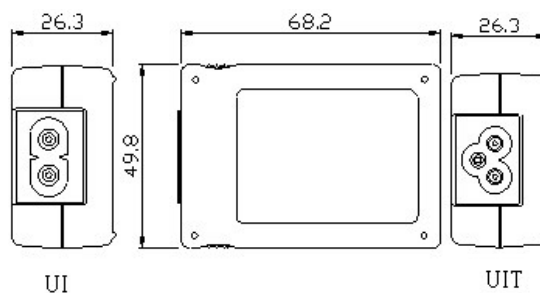

DIMENSION : L*W*H: 68.2*49.8*26.3

*** When X=1, It Indicates Input Voltage AC100V-120V,50/60Hz

*** When X=3, It Indicates Input Voltage AC100V-240V,50/60Hz

*** UI:IEC320 C 8/ 2PIN

*** UIT:IEC320 C6 / 3PIN

FEATURE:

- Constant Voltage Mode
- Super Mini Size and Easy Portable
- Light & Convenient Plug In

APPLICATION:

- Mini Note Book PC
- Digital Camera
- CD-ROM & HUB
- Communication Terminals
- Wireless Lan Station
- Hard Disk
- Portable Device Or Machine

INPUT/OUTPUT SPECIFICATIONS:

Input Voltage:	AC100V-120V, AC100V-240V,50/60Hz
Range Voltage:	AC 90V-132V, AC 90V-264V,47/63Hz
Output Power:	15W
Output Voltage:	3V-24V
Over Current Protection:	120% Min
Over Voltage Protection:	120% Min
Short Protection:	Auto Recovery
Load Regulation:	±5%

GENERAL SPECIFICATIONS:

Operating Temperature:	0 ~ 40°C
Operating Relative Humidity:	5 ~ 95%RH
Storage Temperature:	-20 ~ 85 °C
Withstanding Voltage:	(UI(T)118)AC 2000V/Min (between Input & Output),10mA(Max.) (UI(T)318)AC 3000V/Min (between Input & Output),10mA(Max.)
Insulation Resistance:	DC500V 100MΩ(Min.) (between Input & Output)
Efficiency:	70% Min

SAFETY:

- UI(UIT)118 :PSE-MARK,UL/CUL,BSMI
- UI318 : PSE-MARK,UL/CUL,CE,CB,UV/GS,UK,CCC,C-TICK,EK-MARK,BSMI,PSB
- UIT318 : PSE-MARK,UL/CUL,CE,CB,TUV/GS

UNIFIVE KOREA CO.,LTD.

서울시 구로구 구로본동 1258번지 중앙유통단지 바동 4116
호

TEL:+82-2-6679-7134 FAX:+82-2-6679-7135

UNIFIVE INTERNATIONAL LIMITED

Suite 2408, 24/F., Tower 2, Lippo Centre, 89 Queensway, Hong Kong
Tel: +852-8303-2146 Fax: +852-8303-4110

Copyright ©UNIFIVE KOREA CO.,LTD. [Taiwan Products](#),

[B2BChinaSources](#), [B2BtaiwanSources](#)