

UP0251P-()()P SERIES

17.5-25 Watt AC/DC Wall Mount Adapter

- ◆ Universal Input 90 to 264 VAC
- ◆ EMI Meets FCC/CISPR 22 Class B
- ◆ Designed to Meets UL, CSA, TUV Safety Standards
- ◆ Power Consumption Less Than 0.5W at 240 VAC Input



SPECIFICATIONS

All specifications are typical at nominal line, full load and 25°C unless otherwise noted.

INPUT SPECIFICATIONS


Input Voltage Range 90-264VAC
Input Frequency 47-63 Hz
Inrush Current 70A max.(Cold Start)

GENERAL SPECIFICATIONS

Hold-up Time..... 10mS typ.
Leakage Current 0.25mA max.
Short Circuit Protection Continuous
Overvoltage Protection Option
Continuous Output Power 25W max.
Hi-pot Isolation: Input / Output 4242 VDC

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature Range 0°C to 50°C
Derating 40°C to 50°C 2%/°C
Temperature Coefficient $\pm 0.02\%/^{\circ}\text{C}$
Storage Temperature Range -40°C to +85°C
Humidity, Non-Condensing 0 to 95% RH
Cooling Free-Air Convection
EMI Meets FCC/CISPR 22 Class B Specification



**UNIVERSAL
MICROELECTRONICS**

UP0251P-00P

1 of 2

3,27TH RD., TAICHUNG INDUSTRIAL PARK,
TAICHUNG, TAIWAN, R.O.C.
TEL: 886-4-23590096 FAX: 886-4-23590129

REV. C

OUTPUT SPECIFICATIONS

Model Number	Output Voltage (Volts)	Output Current (Amps)		Max. Power (Watt)	Efficiency (typ.) (%)	Ripple ¹ P-P (mV)	Total Regulation ²
		Min.	Rated				
UP0251P-05P	5	0	3.5	17.5	70	50	±5%
UP0251P-09P	9	0	2.5	22.5	76	90	±5%
UP0251P-12P	12	0	2.1	25	78	120	±4%
UP0251P-16P	16	0	1.6	25	78	160	±4%
UP0251P-19P	19	0	1.3	25	78	190	±4%
UP0251P-24P	24	0	1.0	25	78	240	±4%


NOTES:

1. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to the output cable. Peak to peak and RMS metering equipment shall have a 20 MHz response with probes and cables maintaining frequency response from 200 Hz to 100MHz bandwidth. Output ripple and spikes are measured directly at the output terminals of the power supply without the use of the probe ground clip.
2. Total regulation is defined as the static output regulation at 25°C, including initial tolerance, line voltage and load current within stated limits.

PHYSICAL SPECIFICATIONS

Weight : 150g


Case Material : PC+ABS Plastic UL94V-0 Flammability Rated

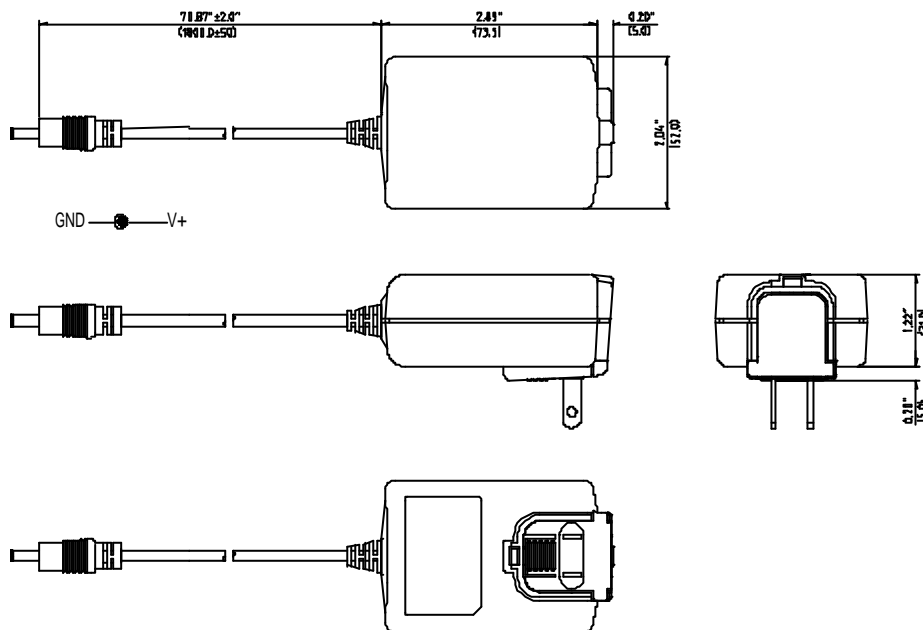

DC plug & pin assignment (CUSTOM DESIGN IS AVAILABLE) IN 2.5/ OUT5.5 DC PLUG FEMALES

NOTES:

1. All dimensions in inches (mm).
2. Tolerance (except cable length): .xx = ±0.04
.xxx = ±0.010



UP0251P-00P

**UNIVERSAL
MICROELECTRONICS**

2 of 2

3,27TH RD., TAICHUNG INDUSTRIAL PARK,
TAICHUNG, TAIWAN, R.O.C.

TEL: 886-4-23590096 FAX: 886-4-23590129

REV. C